
MANITOWOC ENGINEERING CO.

A Division of The Manitowoc Company, Inc. Manitowoc, Wisconsin 54220

DRAGLINE RANGE DIAGRAM

38" (1.0m) DRUMS WITH 1³/₄" (44.5mm) DRAG ROPE (OPTIONAL)

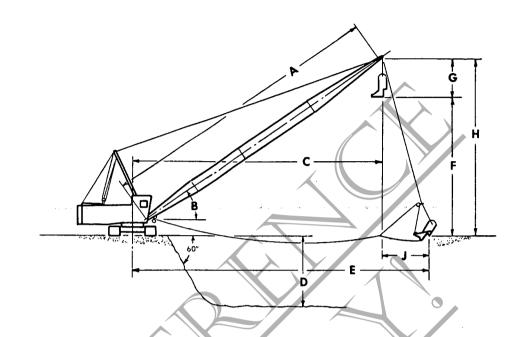

The working ranges in the table below are based on the following conditions:

- 1. Dimension 'F' is based on a 'G' dimension of 20' (6.1m).
- Dimension 'D' is based on a 16' (4.9m) floor level bottom to fill the bucket and casting distance 'J' equal to approximately 1/3 the dumping height 'F'. The two dimensions are also based on maximum drum capacity with one layer of rope. Front drum (hoist) capacity — 184' (56.1m) of 13%" (34.9mm) diameter rope — drum No. 48142. Rear drum

(drag) capacity — 144' (43.9m) of 1¾" (44.5mm) diameter rope — drum No. 48224. The depth of cut, casting distance and digging reach may vary considerably depending on digging conditions, design of bucket and operator's skill. Maximum digging depths are attainable under ideal conditions and cannot be guaranteed.

4600 VICON

 New machines equipped with wire rope to dig to a depth of 60' (18.3m), 70' (21.3m) and 80' (24.4m) for boom lengths of 100' (30.5m), 120' (36.6m) and 140' (42.7m) respectively.

A	BOOM LENGTH	FEET	100 30.5			120 . 36.6			140 42.7		
		METERS									
В	BOOM ANGLE	DEGREE	30	35	40	30	35	40	30	35	40
С	CL OF ROTATION	FEET	95	90	85	112	106	100	129	123	115
	TO CENTER DUMP	METERS	29.0	27.4	25.9	34.1	32.3	30.5	39.3	37.5	35.1
D	DEPTH CUT (APPROX.)	FEET	87	82	75	112	104	96	95	93	83
		METERS	26.5	25.0	22.9	34.1	31.7	29.3	29.0	28.3	25.3
E	DIGGING REACH (APPROX.)	FEET	108	105	102	128	125	122	148	146	141
		METERS	32.9	32.0	31.1	39.0	38.1	37.2	45.1	44.5	43.0
F	DUMPING	FEET	38	45	52	48	57	65	58	68	78
	HEIGHT	METERS	11.6	13.7	15.8	14.6	17.4	19.8	17.7	20.7	23.8
н	HEIGHT FROM GRADE TO CL	FEET	58	65	72	68	77	85	78	88	98
	OF BOOM POINT	METERS	17.7	19.8	21.9	20.7	23.5	25.9	23.8	26.8	29.9
J	CASTING	FEET	13	15	17	16	19	22	19	23	26
	DISTANCE	METERS	4.0	4.6	5.2	4.9	5.8	6.7	5.8	7.0	7.9