

Igo T 139

POTAIN®


View larger

Maximum capacity: 8 t

Maximum reach: 55 m

Maximum boom tip load: 1.2 t at 55 m

Height under hook with horizontal jib: 40.7 m

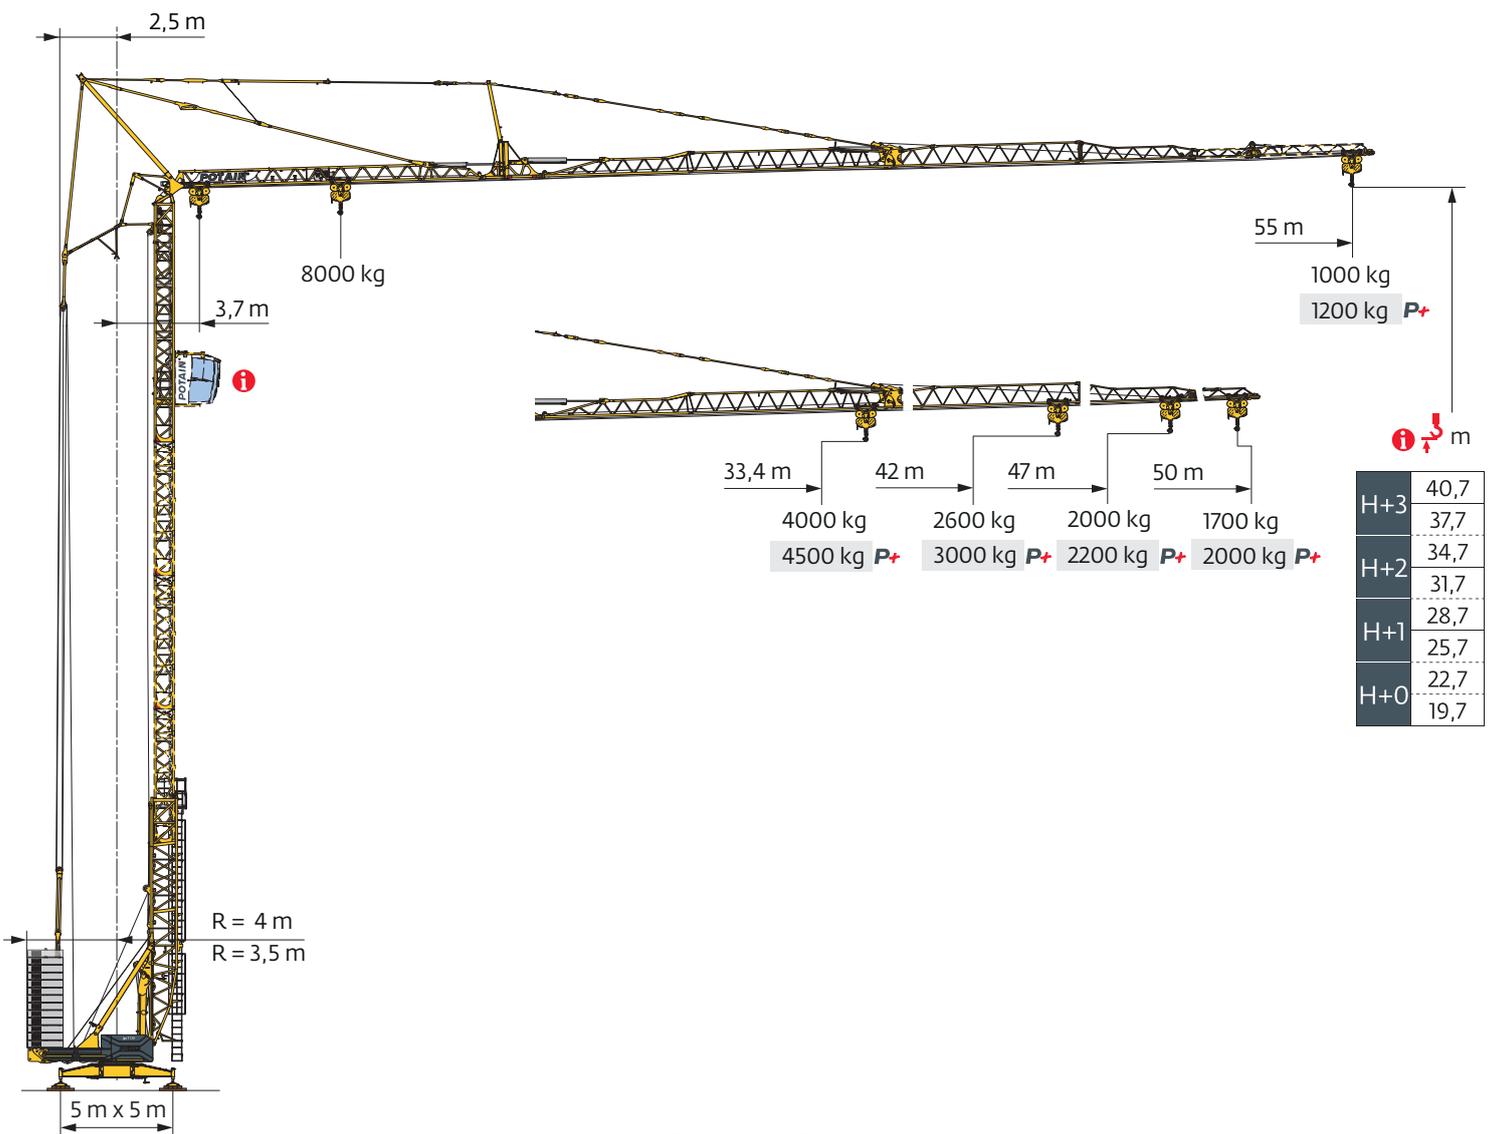

> Contact your local dealer for more information. Visit www.manitowoc.com to find your local dealer.



Potain's most powerful Igo T. Perfectly suited to residential and bridge construction.

Best return on investment

- Variable height with 6 m extension masts
- Standard and P+ load curve dependent on hook height
- Easy assembly
- Transport with existing Potain J215M axle

Simplified assembly

- Smart set-up software for step-by-step guidance during assembly
- Automated retaining drum locking system
- Simplified boom opening system
- Proportionnal control for Mast and jib cylinders

High-performance mechanisms

- Lifting 25 HPL 20 with 4 permanent strands
- HPS 162 slewing: counter slew mode and wind resistance without using the slew brake. Proportional control with 3 drive profiles thanks to drive control function

2 luffing jibs available at 10° and 30°

- 30° raised jib with compensation (Load curve 4 t - 1 t)
- 10° raised jib without compensation (Load curve 1.3 t - 800 kg)

New electrical cabinet

- With top opening to protect the technician in the event of intervention in the cabinet
- Dedicated compartment for radio control transmitter and battery charger
- CCS-type electrical architecture with a 7 inch Colour touchscreen in the electrical cabinet

