




Liftcrane Jib Capacities

**Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating**

Meets
ANSI B30.5
Requirements



555 SERIES 2

LIFTING CAPACITIES: Chart supplements boom capacity chart **No. 8436-AM**. Lifting capacities for various boom lengths, jib lengths and jib operating radii are for freely suspended loads and do not exceed 75% of a static tipping load. Capacities based on structural competence are denoted by an asterisk (*).

Weight of all load blocks, hooks, weight ball, slings, hoist lines, etc., beneath boom and jib point sheaves, is considered part of jib load. Boom and jib are not to be lowered beyond radii where combined weights are greater than rated capacity. Where no capacity is shown, operation is not intended or approved.

OPERATING CONDITIONS: Machine to operate in a level position on a firm uniformly supporting surface. Refer to boom rigging **No. A00952**, jib assembly **No. A00953** and Wire Rope Specification chart **No. 8443-A**. Crane operator judgment must be used to allow for dynamic load effects of swinging, hoisting or lowering, travel, wind conditions, as well as adverse operating conditions and physical machine depreciation. Refer to operators manual for operating guidelines.

MACHINE TRAVEL: Machine to travel on a firm, level and uniformly supporting surface and boom within boom angle range shown in capacity chart. Refer to Maximum Allowable Travel Specification chart **No. 8445-A**.

OPERATING RADIUS: Operating radius is horizontal distance from axis of rotation to center of vertical hoist line or load block. Boom angle is angle between horizontal and centerline of boom butt and inserts, and is an indication of operating radius. In all cases, operating radius shall govern capacity.


JIB POINT ELEVATION: Jib point elevation is vertical distance from ground level to centerline of jib point shaft.

MACHINE EQUIPMENT: Machine equipped with 7 264 mm crawlers, 1 219 mm treads, 7 010 mm live mast, 16 part boom hoist reeving, boom support straps, rotating bed No. A01066¹ or No. A03188 (refer to I.D. plate at front of rotating bed), 44 680 kg crane counterweight and two 9 980 kg carbody counterweights.

¹WARNING: 570 kg front counterweight is required for cranes with rotating bed No. A01066 that do not have free-fall option. Counterweight can be removed only if crane has free-fall option on both front and rear drums.

Maximum whip line capacity on 28 mm wire rope with single part line is 13 610 kg or 26 760 kg with two part line (9 070 kg per line when auxiliary drum equipped for 26 mm wire rope is used).

Maximum Boom and Jib Lengths Lifted Unassisted			
Over End of Blocked Crawlers		Over Side of Crawlers	
Boom Length	Jib No. 134	Boom Length	Jib No. 134
(a,b) 76.2m	—	(b) 67.1m	—
(b) 73.2m	—	64.0m	—
70.1m	—	61.0m	9.1m
67.1m	12.2m	57.9m	15.2m
64.0m	18.3m	54.9m	24.4m
61.0m	24.4m		
Load block, hook and weight ball on ground at start. (a) Upper boom point cannot be attached on 76.2m boom. (b) Upper wire rope guide (No. A04352) for third line cannot be attached on 73.2m and 76.2m booms and cannot be lifted over side of crawlers on 67.1m boom.			

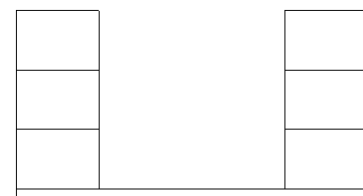

44 680 kg Crane Counterweight
6 Side Boxes


Upper boom point and upper wire rope guide (No. A04352) for third line must be removed before use of this chart.



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

9.1m (30 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
27.4m (90 Ft.) BOOM										
9.1	79.2	37.6	26 700 *							9.1
10.0	77.8	37.4	26 700 *							10.0
12.0	74.6	36.9	26 700 *	77.1	36.6	25 900*				12.0
14.0	71.3	36.2	26 700 *	73.7	36.0	25 300*	76.3	35.4	19 700*	14.0
16.0	67.9	35.4	26 100	70.4	35.2	24 700*	72.8	34.6	18 400*	16.0
18.0	64.4	34.5	23 100	66.9	34.2	23 200	69.3	33.6	17 300*	18.0
20.0	60.9	33.4	19 800	63.3	33.1	20 000	65.6	32.5	16 400*	20.0
22.0	57.2	32.1	17 300	59.5	31.9	17 600	61.8	31.2	15 600*	22.0
24.0	53.3	30.7	15 300	55.6	30.4	15 500	57.8	29.7	14 900*	24.0
26.0	49.2	29.0	13 600	51.5	28.7	13 800	53.5	28.0	14 000	26.0
28.0	44.8	27.1	12 200	47.1	26.7	12 400	49.0	26.0	12 500	28.0
32.0	34.8	22.1	9 900	36.8	21.6	10 000				32.0
30.5m (100 Ft.) BOOM										
9.1	80.0	40.7	26 700 *							9.1
10.0	78.8	40.5	26 700 *							10.0
12.0	75.8	40.1	26 700 *	78.1	39.8	26 100*				12.0
14.0	72.8	39.4	26 700 *	75.1	39.2	25 500*	77.4	38.6	20 200*	14.0
16.0	69.7	38.7	26 000	72.0	38.5	25 000*	74.2	37.9	19 000*	16.0
18.0	66.5	37.9	23 000	68.8	37.6	23 200	71.0	37.0	17 900*	18.0
20.0	63.3	36.9	19 700	65.6	36.6	20 000	67.7	36.0	16 900*	20.0
22.0	60.0	35.8	17 300	62.2	35.5	17 500	64.3	34.9	16 100*	22.0
24.0	56.5	34.5	15 300	58.7	34.2	15 500	60.8	33.5	15 400*	24.0
26.0	53.0	33.0	13 600	55.1	32.7	13 800	57.1	32.0	13 900	26.0
28.0	49.2	31.3	12 100	51.3	31.0	12 300	53.2	30.3	12 500	28.0
32.0	40.8	27.2	9 900	42.8	26.8	10 000	44.4	25.9	10 100	32.0
36.0	30.6	21.4	8 100	32.4	20.9	8 200				36.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

9.1m (30 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
33.5m (110 Ft.) BOOM										
9.1	80.7	43.8	26 700 *							9.1
10.0	79.6	43.7	26 700 *							10.0
12.0	76.8	43.2	26 700 *	79.0	43.0	26 300 *				12.0
14.0	74.0	42.6	26 700 *	76.2	42.4	25 700 *	78.3	41.8	20 700 *	14.0
16.0	71.2	42.0	25 900	73.3	41.7	25 200 *	75.5	41.1	19 400 *	16.0
18.0	68.3	41.2	22 900	70.4	40.9	23 200	72.5	40.3	18 400 *	18.0
20.0	65.4	40.3	19 600	67.5	40.0	19 900	69.5	39.4	17 400 *	20.0
22.0	62.3	39.3	17 100	64.4	39.0	17 400	66.4	38.4	16 600 *	22.0
24.0	59.2	38.1	15 100	61.3	37.8	15 300	63.2	37.2	15 500	24.0
26.0	56.0	36.8	13 400	58.0	36.5	13 600	59.9	35.8	13 800	26.0
28.0	52.7	35.3	12 000	54.7	35.0	12 200	56.5	34.3	12 300	28.0
32.0	45.4	31.7	9 700	47.4	31.4	9 900	49.0	30.6	10 000	32.0
36.0	37.1	27.0	8 000	38.9	26.6	8 100				36.0
40.0	26.6	20.3	6 600							40.0
36.6m (120 Ft.) BOOM										
10.7	79.4	46.6	26 700 *							10.7
12.0	77.7	46.3	26 700 *							12.0
14.0	75.1	45.8	26 700 *	77.1	45.6	25 900 *	79.2	45.0	21 000 *	14.0
16.0	72.5	45.2	25 800	74.5	44.9	25 400 *	76.5	44.4	19 800 *	16.0
18.0	69.8	44.5	22 700	71.8	44.2	23 200	73.8	43.6	18 800 *	18.0
20.0	67.1	43.7	19 500	69.1	43.4	19 800	71.0	42.8	17 900 *	20.0
22.0	64.3	42.7	17 000	66.3	42.4	17 300	68.2	41.8	17 000	22.0
24.0	61.5	41.7	15 000	63.4	41.4	15 200	65.3	40.7	15 600	24.0
26.0	58.6	40.5	13 300	60.5	40.2	13 500	62.3	39.5	13 800	26.0
28.0	55.6	39.1	11 900	57.4	38.8	12 100	59.2	38.1	12 300	28.0
32.0	49.1	35.9	9 600	51.0	35.6	9 700	52.6	34.8	9 900	32.0
36.0	42.0	31.9	7 900	43.7	31.5	8 000	45.2	30.6	8 100	36.0
40.0	33.6	26.5	6 500	35.2	26.1	6 600				40.0
44.0	22.7	18.7	5 400							44.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

9.1m (30 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
39.6m (130 Ft.) BOOM										
10.7	80.1	49.7	26 700 *							10.7
12.0	78.5	49.5	26 700 *							12.0
14.0	76.1	49.0	26 700 *	78.0	48.7	26 100*	79.9	48.1	21 400*	14.0
16.0	73.6	48.4	25 800	75.5	48.1	25 500	77.4	47.6	20 200*	16.0
18.0	71.2	47.7	22 600	73.0	47.5	23 000	74.9	46.9	19 200*	18.0
20.0	68.6	47.0	19 300	70.5	46.7	19 600	72.3	46.1	18 300*	20.0
22.0	66.1	46.1	16 800	67.9	45.8	17 100	69.7	45.2	17 300	22.0
24.0	63.5	45.1	14 800	65.3	44.8	15 100	67.0	44.2	15 400	24.0
26.0	60.8	44.0	13 100	62.6	43.7	13 400	64.3	43.1	13 600	26.0
28.0	58.0	42.8	11 700	59.8	42.5	11 900	61.4	41.8	12 200	28.0
32.0	52.2	39.9	9 400	53.9	39.6	9 600	55.5	38.9	9 800	32.0
36.0	45.9	36.3	7 700	47.6	36.0	7 900	49.0	35.2	8 000	36.0
40.0	38.8	31.8	6 400	40.4	31.4	6 400				40.0
44.0	30.3	25.8	5 200	31.7	25.3	5 300				44.0
42.7m (140 Ft.) BOOM										
10.7	80.7	52.8	26 700 *							10.7
12.0	79.2	52.6	26 700 *							12.0
14.0	76.9	52.1	26 700 *	78.7	51.9	26 300*	80.5	51.3	21 700*	14.0
16.0	74.6	51.6	25 700	76.4	51.3	25 600	78.2	50.7	20 600*	16.0
18.0	72.3	51.0	22 400	74.1	50.7	22 900	75.8	50.1	19 600*	18.0
20.0	70.0	50.2	19 200	71.7	50.0	19 500	73.4	49.4	18 700*	20.0
22.0	67.6	49.4	16 700	69.3	49.2	17 000	71.0	48.5	17 500	22.0
24.0	65.1	48.5	14 700	66.8	48.2	15 000	68.5	47.6	15 300	24.0
26.0	62.7	47.5	13 000	64.4	47.2	13 300	66.0	46.6	13 500	26.0
28.0	60.1	46.4	11 600	61.8	46.1	11 800	63.4	45.4	12 100	28.0
32.0	54.8	43.7	9 300	56.5	43.4	9 500	58.0	42.7	9 700	32.0
36.0	49.1	40.5	7 600	50.7	40.2	7 800	52.1	39.4	7 900	36.0
40.0	42.9	36.5	6 300	44.4	36.2	6 400	45.7	35.3	6 500	40.0
44.0	35.8	31.5	5 100	37.2	31.1	5 200				44.0
48.0	27.1	24.7	4 200							48.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

9.1m (30 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
45.7m (150 Ft.) BOOM										
12.2	79.6	55.7	26 700 *							12.2
14.0	77.7	55.3	26 700 *	79.3	55.0	26 400*				14.0
16.0	75.5	54.8	25 600	77.2	54.5	25 700	78.9	53.9	20 900*	16.0
18.0	73.3	54.2	22 300	75.0	53.9	22 800	76.6	53.3	19 900*	18.0
20.0	71.1	53.5	19 100	72.8	53.2	19 400	74.4	52.6	19 000	20.0
22.0	68.9	52.7	16 600	70.5	52.5	16 900	72.1	51.8	17 400	22.0
24.0	66.6	51.9	14 500	68.2	51.6	14 900	69.8	51.0	15 200	24.0
26.0	64.3	50.9	12 900	65.9	50.7	13 100	67.5	50.0	13 400	26.0
28.0	61.9	49.9	11 400	63.5	49.6	11 700	65.1	48.9	11 900	28.0
32.0	57.1	47.5	9 200	58.6	47.1	9 400	60.1	46.5	9 600	32.0
36.0	51.9	44.5	7 500	53.4	44.2	7 600	54.7	43.4	7 800	36.0
40.0	46.3	40.9	6 100	47.7	40.6	6 200	49.0	39.8	6 300	40.0
44.0	40.1	36.6	5 000	41.5	36.1	5 100				44.0
48.0	32.9	31.0	4 100	34.2	30.5	4 100				48.0
48.8m (160 Ft.) BOOM										
12.2	80.1	58.8	26 700 *							12.2
14.0	78.3	58.4	26 700 *	79.9	58.1	26 600*				14.0
16.0	76.3	57.9	25 600	77.9	57.6	25 700	79.5	57.0	21 200*	16.0
18.0	74.2	57.4	22 100	75.8	57.1	22 700	77.4	56.5	20 200*	18.0
20.0	72.2	56.7	18 900	73.7	56.4	19 300	75.3	55.8	19 300	20.0
22.0	70.0	56.0	16 500	71.6	55.7	16 800	73.1	55.1	17 200	22.0
24.0	67.9	55.2	14 400	69.5	54.9	14 700	71.0	54.3	15 000	24.0
26.0	65.8	54.3	12 800	67.3	54.0	13 000	68.8	53.4	13 300	26.0
28.0	63.5	53.3	11 300	65.1	53.0	11 600	66.5	52.4	11 800	28.0
32.0	59.0	51.1	9 100	60.5	50.8	9 300	61.9	50.1	9 500	32.0
36.0	54.2	48.4	7 300	55.7	48.0	7 500	57.0	47.3	7 600	36.0
40.0	49.1	45.1	6 000	50.5	44.8	6 100	51.8	44.0	6 200	40.0
44.0	43.6	41.2	4 900	44.9	40.8	4 900	46.1	39.9	5 000	44.0
48.0	37.4	36.4	3 900	38.7	35.9	4 000				48.0
52.0	30.1	30.2	3 100							52.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

9.1m (30 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
51.8m (170 Ft.) BOOM										
12.2	80.6	61.9	26 700 *							12.2
14.0	78.9	61.5	26 700 *	80.4	61.2	26 700*				14.0
16.0	77.0	61.1	25 500	78.5	60.8	25 700	80.0	60.2	21 500*	16.0
18.0	75.0	60.5	22 000	76.5	60.3	22 500	78.0	59.6	20 500*	18.0
20.0	73.1	59.9	18 800	74.6	59.7	19 200	76.1	59.0	19 600	20.0
22.0	71.1	59.3	16 300	72.6	59.0	16 600	74.0	58.4	17 000	22.0
24.0	69.1	58.5	14 300	70.6	58.2	14 600	72.0	57.6	14 900	24.0
26.0	67.0	57.7	12 600	68.5	57.4	12 800	69.9	56.7	13 200	26.0
28.0	65.0	56.7	11 100	66.4	56.5	11 400	67.8	55.8	11 700	28.0
32.0	60.7	54.6	8 900	62.1	54.3	9 100	63.5	53.6	9 300	32.0
36.0	56.3	52.1	7 200	57.7	51.8	7 300	59.0	51.1	7 500	36.0
40.0	51.6	49.1	5 800	52.9	48.8	6 000	54.1	48.0	6 100	40.0
44.0	46.5	45.6	4 700	47.9	45.2	4 800	49.0	44.4	4 900	44.0
48.0	41.0	41.3	3 800	42.3	40.9	3 900				48.0
52.0	34.8	36.0	3 000	36.0	35.5	3 000				52.0
56.0	27.4	29.2	2 300							56.0
54.9m (180 Ft.) BOOM										
13.7	79.7	64.7	26 700 *							13.7
14.0	79.4	64.6	26 700 *							14.0
16.0	77.6	64.2	25 400	79.1	63.9	25 600				16.0
18.0	75.8	63.7	21 900	77.2	63.4	22 400	78.6	62.8	20 800*	18.0
20.0	73.9	63.1	18 600	75.3	62.8	19 100	76.7	62.2	19 600	20.0
22.0	72.0	62.5	16 200	73.4	62.2	16 500	74.8	61.6	17 000	22.0
24.0	70.1	61.8	14 100	71.5	61.5	14 500	72.9	60.9	14 800	24.0
26.0	68.2	61.0	12 500	69.6	60.7	12 800	71.0	60.1	13 100	26.0
28.0	66.2	60.1	11 000	67.6	59.8	11 300	69.0	59.2	11 600	28.0
32.0	62.2	58.1	8 800	63.6	57.8	9 000	64.9	57.1	9 300	32.0
36.0	58.1	55.8	7 100	59.4	55.5	7 200	60.7	54.7	7 400	36.0
40.0	53.7	53.0	5 700	55.0	52.7	5 800	56.2	51.9	6 000	40.0
44.0	49.1	49.7	4 600	50.4	49.4	4 700	51.5	48.6	4 800	44.0
48.0	44.1	45.8	3 600	45.4	45.5	3 800	46.4	44.6	3 900	48.0
52.0	38.6	41.2	2 900	39.8	40.8	3 000				52.0
56.0	32.3	35.4	2 200	33.5	34.9	2 300				56.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

9.1m (30 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
57.9m (190 Ft.) BOOM										
13.7	80.2	67.8	26 700*							13.7
14.0	79.9	67.7	26 700*							14.0
16.0	78.2	67.3	25 400	79.6	67.0	25 600				16.0
18.0	76.4	66.8	21 700	77.8	66.6	22 300	79.2	65.9	21 000*	18.0
20.0	74.7	66.3	18 500	76.0	66.0	19 000	77.4	65.4	19 500	20.0
22.0	72.9	65.7	16 000	74.2	65.4	16 400	75.6	64.8	16 800	22.0
24.0	71.1	65.0	14 000	72.4	64.7	14 300	73.7	64.1	14 700	24.0
26.0	69.2	64.3	12 300	70.6	64.0	12 600	71.9	63.3	12 900	26.0
28.0	67.4	63.4	10 900	68.7	63.2	11 200	70.0	62.5	11 500	28.0
32.0	63.6	61.6	8 600	64.9	61.3	8 800	66.2	60.6	9 100	32.0
36.0	59.7	59.4	6 900	61.0	59.0	7 100	62.2	58.3	7 300	36.0
40.0	55.6	56.8	5 500	56.9	56.4	5 700	58.0	55.7	5 900	40.0
44.0	51.3	53.7	4 400	52.6	53.4	4 500	53.7	52.6	4 700	44.0
48.0	46.8	50.2	3 500	48.0	49.8	3 600	49.0	49.0	3 700	48.0
52.0	41.8	46.0	2 700	43.0	45.6	2 800				52.0
56.0	36.3	40.9	2 000	37.4	40.5	2 100				56.0
61.0m (200 Ft.) BOOM										
13.7	80.6	70.9	26 200*							13.7
14.0	80.4	70.8	26 200*							14.0
16.0	78.7	70.4	25 100	80.0	70.2	24 600				16.0
18.0	77.0	70.0	21 600	78.3	69.7	22 300	79.7	69.1	21 300*	18.0
20.0	75.3	69.5	18 400	76.6	69.2	18 800	78.0	68.6	19 400	20.0
22.0	73.6	68.9	15 900	74.9	68.6	16 300	76.2	68.0	16 700	22.0
24.0	71.9	68.2	13 900	73.2	68.0	14 200	74.5	67.3	14 600	24.0
26.0	70.2	67.5	12 200	71.5	67.2	12 500	72.7	66.6	12 800	26.0
28.0	68.4	66.7	10 700	69.7	66.5	11 000	70.9	65.8	11 300	28.0
32.0	64.9	65.0	8 500	66.1	64.7	8 700	67.3	64.0	9 000	32.0
36.0	61.2	62.9	6 700	62.4	62.6	6 900	63.6	61.9	7 100	36.0
40.0	57.3	60.4	5 400	58.6	60.1	5 500	59.7	59.4	5 700	40.0
44.0	53.3	57.6	4 300	54.5	57.3	4 400	55.6	56.5	4 500	44.0
48.0	49.1	54.3	3 300	50.3	54.0	3 500	51.3	53.2	3 600	48.0
52.0	44.6	50.5	2 600	45.7	50.1	2 700	46.6	49.2	2 800	52.0
56.0	39.6	46.0	1 900	40.7	45.5	2 000				56.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

9.1m (30 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
64.0m (210 Ft.) BOOM										
13.7	81.0	74.0	23 500 *							13.7
14.0	80.8	73.9	23 500 *							14.0
16.0	79.2	73.5	23 200 *	80.5	73.3	22 100 *				16.0
18.0	77.6	73.1	21 400	78.8	72.8	21 500				18.0
20.0	76.0	72.6	18 200	77.2	72.3	18 700	78.5	71.7	19 300	20.0
22.0	74.3	72.1	15 700	75.6	71.8	16 100	76.8	71.2	16 600	22.0
24.0	72.7	71.5	13 700	73.9	71.2	14 000	75.2	70.5	14 500	24.0
26.0	71.0	70.8	12 000	72.3	70.5	12 400	73.5	69.8	12 700	26.0
28.0	69.4	70.0	10 600	70.6	69.7	10 900	71.8	69.1	11 200	28.0
32.0	66.0	68.3	8 300	67.2	68.0	8 600	68.3	67.4	8 800	32.0
36.0	62.5	66.4	6 600	63.7	66.0	6 800	64.8	65.4	7 000	36.0
40.0	58.9	64.1	5 200	60.0	63.7	5 400	61.1	63.0	5 600	40.0
44.0	55.1	61.4	4 100	56.3	61.1	4 300	57.3	60.3	4 400	44.0
48.0	51.1	58.3	3 200	52.3	58.0	3 300	53.3	57.2	3 400	48.0
52.0	47.0	54.8	2 400	48.1	54.4	2 500	49.0	53.6	2 600	52.0
56.0				43.5	50.2	1 800	44.4	49.3	1 900	56.0
67.1m (220 Ft.) BOOM										
15.2	80.2	76.8	21 000 *							15.2
16.0	79.6	76.6	20 800 *							16.0
18.0	78.1	76.2	20 500 *	79.3	76.0	19 700 *				18.0
20.0	76.5	75.8	18 100	77.7	75.5	18 700	79.0	74.9	18 300	20.0
22.0	75.0	75.2	15 600	76.2	75.0	16 000	77.4	74.3	16 600	22.0
24.0	73.4	74.6	13 600	74.6	74.4	14 000	75.8	73.7	14 400	24.0
26.0	71.8	74.0	11 900	73.0	73.7	12 200	74.2	73.1	12 600	26.0
28.0	70.2	73.3	10 400	71.4	73.0	10 800	72.6	72.4	11 100	28.0
32.0	67.0	71.7	8 200	68.2	71.4	8 400	69.3	70.7	8 700	32.0
36.0	63.7	69.8	6 400	64.8	69.5	6 700	65.9	68.8	6 900	36.0
40.0	60.2	67.6	5 100	61.4	67.3	5 300	62.4	66.6	5 500	40.0
44.0	56.7	65.1	4 000	57.8	64.8	4 100	58.8	64.0	4 300	44.0
48.0	53.0	62.2	3 100	54.1	61.9	3 200	55.1	61.1	3 300	48.0
52.0	49.1	58.9	2 300	50.2	58.6	2 400	51.1	57.7	2 500	52.0
56.0							46.8	53.9	1 800	56.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

12.2m (40 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
27.4m (90 Ft.) BOOM										
9.1	80.7	40.7	23 500*							9.1
10.0	79.5	40.5	23 100*							10.0
12.0	76.5	40.0	22 200*							12.0
14.0	73.4	39.4	21 400*	76.5	39.1	19 600*	79.7	38.4	16 700*	14.0
16.0	70.4	38.7	20 700*	73.4	38.4	19 100*	76.5	37.6	15 600*	16.0
18.0	67.2	37.9	20 000*	70.3	37.5	18 500*	73.3	36.8	14 600*	18.0
20.0	64.0	36.9	19 400	67.0	36.5	18 100*	70.0	35.7	13 800*	20.0
22.0	60.7	35.7	17 700	63.6	35.4	17 500	66.5	34.6	13 100*	22.0
24.0	57.2	34.4	15 500	60.2	34.1	15 900	63.0	33.2	12 500*	24.0
26.0	53.6	33.0	13 800	56.5	32.6	14 100	59.2	31.7	11 900*	26.0
28.0	49.9	31.3	12 400	52.7	30.9	12 600	55.3	29.9	11 400*	28.0
32.0	41.5	27.1	10 200	44.2	26.6	10 300	46.4	25.5	10 400	32.0
36.0	31.3	21.3	8 400	33.7	20.7	8 500				36.0
30.5m (100 Ft.) BOOM										
10.7	79.3	43.5	23 100*							10.7
12.0	77.5	43.2	22 500*							12.0
14.0	74.7	42.6	21 700*	77.5	42.3	19 800*	80.5	41.6	17 000*	14.0
16.0	71.8	42.0	21 000*	74.7	41.6	19 300*	77.6	40.9	15 900*	16.0
18.0	69.0	41.2	20 400*	71.8	40.8	18 800*	74.6	40.1	15 000*	18.0
20.0	66.0	40.3	19 700	68.8	39.9	18 300*	71.6	39.1	14 200*	20.0
22.0	63.0	39.3	17 500	65.8	38.9	17 600	68.5	38.1	13 500*	22.0
24.0	59.9	38.1	15 400	62.6	37.7	15 800	65.3	36.9	12 900*	24.0
26.0	56.7	36.8	13 800	59.4	36.4	14 000	61.9	35.5	12 300*	26.0
28.0	53.3	35.3	12 400	56.0	34.9	12 600	58.4	34.0	11 800*	28.0
32.0	46.1	31.7	10 100	48.6	31.2	10 200	50.9	30.2	10 400	32.0
36.0	37.7	26.9	8 300	40.1	26.4	8 400				36.0
40.0	27.2	20.2	6 900							40.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

12.2m (40 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
33.5m (110 Ft.) BOOM										
10.7	80.0	46.6	23 300*							10.7
12.0	78.3	46.3	22 800*							12.0
14.0	75.7	45.8	22 000*	78.4	45.5	20 000*				14.0
16.0	73.1	45.2	21 300*	75.8	44.8	19 500*	78.5	44.1	16 200*	16.0
18.0	70.4	44.5	20 700*	73.1	44.1	19 000*	75.7	43.3	15 300*	18.0
20.0	67.7	43.6	19 900	70.3	43.3	18 600*	73.0	42.5	14 500*	20.0
22.0	64.9	42.7	17 300	67.5	42.3	17 800	70.1	41.5	13 800*	22.0
24.0	62.1	41.6	15 300	64.7	41.2	15 600	67.2	40.4	13 200*	24.0
26.0	59.2	40.4	13 600	61.7	40.0	13 900	64.2	39.2	12 700*	26.0
28.0	56.2	39.1	12 200	58.7	38.7	12 400	61.0	37.8	12 200*	28.0
32.0	49.7	35.9	9 900	52.2	35.4	10 100	54.4	34.5	10 300	32.0
36.0	42.6	31.8	8 200	44.9	31.3	8 300	46.8	30.2	8 400	36.0
40.0	34.2	26.5	6 800	36.3	25.9	6 900				40.0
44.0	23.2	18.7	5 600							44.0
36.6m (120 Ft.) BOOM										
10.7	80.7	49.7	23 500*							10.7
12.0	79.1	49.4	23 000*							12.0
14.0	76.6	49.0	22 300*	79.2	48.6	20 100*				14.0
16.0	74.2	48.4	21 600*	76.7	48.0	19 600*	79.3	47.3	16 500*	16.0
18.0	71.7	47.7	21 000*	74.2	47.4	19 200*	76.7	46.6	15 600*	18.0
20.0	69.2	46.9	19 800	71.7	46.6	18 700	74.1	45.8	14 900*	20.0
22.0	66.6	46.1	17 200	69.1	45.7	17 800	71.5	44.9	14 200*	22.0
24.0	64.0	45.1	15 200	66.4	44.7	15 500	68.8	43.9	13 600*	24.0
26.0	61.3	44.0	13 500	63.7	43.6	13 800	66.0	42.7	13 000*	26.0
28.0	58.6	42.8	12 100	60.9	42.4	12 300	63.2	41.5	12 400	28.0
32.0	52.8	39.9	9 800	55.1	39.4	10 000	57.2	38.5	10 200	32.0
36.0	46.5	36.3	8 100	48.7	35.8	8 200	50.6	34.8	8 300	36.0
40.0	39.3	31.8	6 700	41.4	31.2	6 800				40.0
44.0	30.8	25.7	5 500	32.7	25.0	5 600				44.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

12.2m (40 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
39.6m (130 Ft.) BOOM										
12.2	79.5	52.5	23 100 *							12.2
14.0	77.4	52.1	22 500 *	79.8	51.7	20 300 *				14.0
16.0	75.2	51.6	21 900 *	77.5	51.2	19 800 *	79.9	50.4	16 800 *	16.0
18.0	72.8	50.9	21 300 *	75.2	50.6	19 300 *	77.6	49.8	15 900 *	18.0
20.0	70.5	50.2	19 600	72.8	49.9	18 900	75.1	49.1	15 200 *	20.0
22.0	68.1	49.4	17 100	70.4	49.0	17 600	72.7	48.2	14 500 *	22.0
24.0	65.7	48.5	15 000	67.9	48.1	15 400	70.2	47.3	13 900 *	24.0
26.0	63.2	47.5	13 300	65.4	47.1	13 600	67.6	46.2	13 300	26.0
28.0	60.6	46.4	11 900	62.9	45.9	12 200	65.0	45.1	12 600	28.0
32.0	55.3	43.7	9 600	57.5	43.3	9 800	59.6	42.4	10 100	32.0
36.0	49.6	40.5	7 900	51.8	40.0	8 100	53.7	39.0	8 200	36.0
40.0	43.4	36.5	6 500	45.4	36.0	6 600	47.1	34.8	6 800	40.0
44.0	36.3	31.5	5 400	38.2	30.9	5 500				44.0
48.0	27.6	24.7	4 500							48.0
42.7m (140 Ft.) BOOM										
12.2	80.1	55.6	23 300 *							12.2
14.0	78.2	55.2	22 700 *	80.4	54.9	20 400 *				14.0
16.0	76.0	54.7	22 100 *	78.2	54.4	20 000 *				16.0
18.0	73.8	54.1	21 500 *	76.0	53.8	19 500 *	78.3	53.0	16 200 *	18.0
20.0	71.6	53.5	19 400	73.8	53.1	19 100	76.0	52.3	15 400 *	20.0
22.0	69.4	52.7	16 900	71.6	52.3	17 500	73.7	51.5	14 800 *	22.0
24.0	67.1	51.9	14 900	69.3	51.5	15 300	71.4	50.6	14 200 *	24.0
26.0	64.8	50.9	13 200	66.9	50.5	13 500	69.0	49.7	13 600	26.0
28.0	62.4	49.9	11 800	64.6	49.5	12 100	66.6	48.6	12 400	28.0
32.0	57.5	47.4	9 500	59.6	47.0	9 700	61.6	46.1	10 000	32.0
36.0	52.4	44.5	7 800	54.4	44.0	8 000	56.2	43.0	8 200	36.0
40.0	46.7	40.9	6 400	48.7	40.4	6 500	50.4	39.3	6 700	40.0
44.0	40.5	36.5	5 300	42.4	36.0	5 400	43.9	34.7	5 500	44.0
48.0	33.4	30.9	4 400	35.1	30.3	4 400				48.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

12.2m (40 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
45.7m (150 Ft.) BOOM										
12.2	80.6	58.7	23 500 *							12.2
14.0	78.8	58.4	22 900 *							14.0
16.0	76.8	57.9	22 300 *	78.9	57.5	20 100*				16.0
18.0	74.7	57.3	21 700 *	76.8	57.0	19 700*	78.9	56.2	16 400*	18.0
20.0	72.6	56.7	19 300	74.7	56.3	19 200	76.8	55.5	15 700*	20.0
22.0	70.5	56.0	16 800	72.6	55.6	17 300	74.7	54.8	15 000*	22.0
24.0	68.4	55.2	14 800	70.4	54.8	15 100	72.5	54.0	14 400*	24.0
26.0	66.2	54.3	13 100	68.3	53.9	13 400	70.3	53.0	13 800	26.0
28.0	64.0	53.3	11 600	66.0	52.9	11 900	68.0	52.0	12 300	28.0
32.0	59.5	51.1	9 300	61.5	50.6	9 600	63.3	49.7	9 900	32.0
36.0	54.7	48.3	7 600	56.6	47.9	7 800	58.4	46.9	8 000	36.0
40.0	49.6	45.1	6 200	51.5	44.6	6 400	53.1	43.6	6 600	40.0
44.0	44.0	41.2	5 100	45.9	40.6	5 300	47.4	39.5	5 400	44.0
48.0	37.8	36.3	4 200	39.5	35.7	4 300				48.0
52.0	30.5	30.2	3 400							52.0
48.8m (160 Ft.) BOOM										
13.7	79.6	61.5	23 200 *							13.7
14.0	79.4	61.5	23 100 *							14.0
16.0	77.4	61.0	22 500 *	79.4	60.7	20 200*				16.0
18.0	75.5	60.5	21 900	77.5	60.1	19 800*	79.5	59.3	16 600*	18.0
20.0	73.5	59.9	19 100	75.5	59.5	19 300	77.5	58.7	15 900*	20.0
22.0	71.5	59.2	16 600	73.5	58.8	17 100	75.5	58.0	15 300*	22.0
24.0	69.5	58.5	14 600	71.5	58.1	15 000	73.4	57.2	14 700*	24.0
26.0	67.5	57.6	12 900	69.4	57.2	13 300	71.4	56.4	13 700	26.0
28.0	65.4	56.7	11 500	67.4	56.3	11 800	69.2	55.4	12 200	28.0
32.0	61.2	54.6	9 200	63.1	54.2	9 500	64.9	53.3	9 700	32.0
36.0	56.7	52.1	7 500	58.6	51.6	7 700	60.3	50.7	7 900	36.0
40.0	52.0	49.1	6 100	53.8	48.6	6 300	55.5	47.6	6 500	40.0
44.0	47.0	45.5	5 000	48.7	45.0	5 100	50.2	43.9	5 300	44.0
48.0	41.5	41.2	4 100	43.2	40.7	4 200				48.0
52.0	35.2	36.0	3 300	36.8	35.3	3 400				52.0
56.0	27.8	29.1	2 600							56.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

12.2m (40 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
51.8m (170 Ft.) BOOM										
13.7	80.1	64.6	23 400*							13.7
14.0	79.9	64.6	23 300*							14.0
16.0	78.0	64.2	22 700*	80.0	63.8	20 300*				16.0
18.0	76.2	63.7	21 800	78.1	63.3	19 900*				18.0
20.0	74.3	63.1	19 000	76.2	62.7	19 400	78.2	61.9	16 100*	20.0
22.0	72.5	62.5	16 500	74.3	62.1	17 000	76.2	61.2	15 500*	22.0
24.0	70.6	61.7	14 400	72.4	61.3	14 900	74.3	60.5	14 900*	24.0
26.0	68.6	61.0	12 800	70.5	60.6	13 100	72.3	59.7	13 500	26.0
28.0	66.7	60.1	11 300	68.5	59.7	11 700	70.3	58.8	12 000	28.0
32.0	62.7	58.1	9 100	64.5	57.7	9 300	66.2	56.8	9 600	32.0
36.0	58.5	55.7	7 300	60.3	55.3	7 500	62.0	54.4	7 800	36.0
40.0	54.2	53.0	5 900	55.9	52.5	6 100	57.5	51.5	6 300	40.0
44.0	49.5	49.7	4 800	51.2	49.2	5 000	52.7	48.1	5 100	44.0
48.0	44.5	45.8	3 900	46.2	45.3	4 000	47.5	44.1	4 100	48.0
52.0	39.0	41.2	3 100	40.6	40.6	3 200				52.0
56.0	32.7	35.4	2 500	34.2	34.7	2 500				56.0
54.9m (180 Ft.) BOOM										
13.7	80.6	67.7	23 500*							13.7
14.0	80.3	67.7	23 400*							14.0
16.0	78.6	67.3	22 900*							16.0
18.0	76.8	66.8	21 800	78.7	66.4	20 000*				18.0
20.0	75.1	66.3	18 900	76.9	65.9	19 500	78.7	65.1	16 300*	20.0
22.0	73.3	65.7	16 400	75.1	65.3	16 900	76.9	64.4	15 700*	22.0
24.0	71.5	65.0	14 400	73.3	64.6	14 800	75.1	63.7	15 000	24.0
26.0	69.7	64.2	12 600	71.4	63.8	13 000	73.2	63.0	13 500	26.0
28.0	67.8	63.4	11 200	69.6	63.0	11 600	71.3	62.1	11 900	28.0
32.0	64.0	61.5	8 900	65.8	61.1	9 200	67.4	60.2	9 500	32.0
36.0	60.1	59.3	7 200	61.8	58.9	7 400	63.4	58.0	7 700	36.0
40.0	56.0	56.7	5 800	57.7	56.3	6 000	59.3	55.3	6 200	40.0
44.0	51.7	53.7	4 700	53.4	53.2	4 900	54.8	52.2	5 000	44.0
48.0	47.2	50.1	3 800	48.8	49.6	3 900	50.1	48.5	4 100	48.0
52.0	42.2	45.9	3 000	43.7	45.4	3 100				52.0
56.0	36.7	40.9	2 300	38.2	40.2	2 400				56.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

12.2m (40 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
57.9m (190 Ft.) BOOM										
13.7	81.0	70.8	23 600 *							13.7
14.0	80.8	70.8	23 600 *							14.0
16.0	79.1	70.4	23 000 *							16.0
18.0	77.4	70.0	21 700	79.2	69.6	20 100*				18.0
20.0	75.7	69.4	18 700	77.5	69.0	19 400	79.2	68.2	16 000*	20.0
22.0	74.0	68.9	16 200	75.8	68.5	16 700	77.5	67.6	15 600*	22.0
24.0	72.3	68.2	14 200	74.0	67.8	14 600	75.7	67.0	15 000	24.0
26.0	70.6	67.5	12 500	72.3	67.1	12 900	74.0	66.2	13 300	26.0
28.0	68.8	66.7	11 000	70.5	66.3	11 400	72.2	65.4	11 800	28.0
32.0	65.2	64.9	8 800	66.9	64.5	9 100	68.5	63.6	9 400	32.0
36.0	61.6	62.8	7 000	63.2	62.4	7 300	64.8	61.5	7 600	36.0
40.0	57.7	60.4	5 600	59.3	60.0	5 900	60.8	59.0	6 100	40.0
44.0	53.7	57.6	4 500	55.3	57.1	4 700	56.7	56.1	4 900	44.0
48.0	49.5	54.3	3 600	51.0	53.8	3 800	52.4	52.7	3 900	48.0
52.0	44.9	50.4	2 800	46.4	49.9	3 000	47.7	48.7	3 100	52.0
56.0	40.0	45.9	2 200	41.4	45.3	2 300				56.0
61.0m (200 Ft.) BOOM										
15.2	80.2	73.7	23 400 *							15.2
16.0	79.6	73.5	23 200 *							16.0
18.0	78.0	73.1	21 700	79.6	72.7	20 200*				18.0
20.0	76.3	72.6	18 600	78.0	72.2	19 300	79.7	71.4	15 700*	20.0
22.0	74.7	72.0	16 100	76.4	71.6	16 600	78.0	70.8	15 400*	22.0
24.0	73.1	71.4	14 000	74.7	71.0	14 500	76.4	70.2	14 800	24.0
26.0	71.4	70.7	12 400	73.1	70.3	12 800	74.7	69.5	13 300	26.0
28.0	69.8	70.0	10 900	71.4	69.6	11 300	73.0	68.7	11 700	28.0
32.0	66.3	68.3	8 600	68.0	67.9	8 900	69.5	67.0	9 300	32.0
36.0	62.8	66.3	6 900	64.4	65.9	7 100	65.9	65.0	7 400	36.0
40.0	59.2	64.0	5 500	60.8	63.6	5 700	62.3	62.6	6 000	40.0
44.0	55.5	61.4	4 400	57.0	60.9	4 600	58.4	59.9	4 800	44.0
48.0	51.5	58.3	3 500	53.0	57.8	3 600	54.3	56.7	3 800	48.0
52.0	47.3	54.7	2 700	48.8	54.2	2 800	50.0	53.1	3 000	52.0
56.0	42.8	50.6	2 000	44.2	50.0	2 200	45.4	48.8	2 200	56.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

12.2m (40 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
64.0m (210 Ft.) BOOM										
15.2	80.6	76.8	21 200 *							15.2
16.0	80.0	76.6	21 100 *							16.0
18.0	78.4	76.2	20 800 *							18.0
20.0	76.9	75.7	18 500	78.5	75.3	19 200	80.1	74.5	15 500*	20.0
22.0	75.3	75.2	15 900	76.9	74.8	16 500	78.6	74.0	15 100*	22.0
24.0	73.8	74.6	13 900	75.4	74.2	14 400	77.0	73.4	14 700	24.0
26.0	72.2	74.0	12 200	73.8	73.6	12 600	75.3	72.7	13 100	26.0
28.0	70.6	73.3	10 800	72.2	72.9	11 200	73.7	72.0	11 600	28.0
32.0	67.4	71.6	8 500	68.9	71.2	8 800	70.4	70.3	9 200	32.0
36.0	64.0	69.8	6 700	65.6	69.3	7 000	67.0	68.4	7 300	36.0
40.0	60.6	67.6	5 300	62.1	67.1	5 600	63.5	66.2	5 800	40.0
44.0	57.0	65.1	4 200	58.5	64.6	4 400	59.9	63.6	4 600	44.0
48.0	53.3	62.2	3 300	54.8	61.7	3 500	56.1	60.7	3 700	48.0
52.0	49.4	58.9	2 500	50.9	58.4	2 700	52.1	57.3	2 800	52.0
56.0	45.3	55.1	1 900	46.7	54.5	2 000	47.8	53.4	2 100	56.0
67.1m (220 Ft.) BOOM										
15.2	80.9	79.9	19 100 *							15.2
16.0	80.4	79.7	19 000 *							16.0
18.0	78.9	79.3	18 800 *							18.0
20.0	77.4	78.9	18 400	79.0	78.5	17 500	80.5	77.6	15 200*	20.0
22.0	75.9	78.4	15 800	77.5	78.0	16 600	79.0	77.1	14 900*	22.0
24.0	74.4	77.8	13 800	75.9	77.4	14 300	77.5	76.5	14 600	24.0
26.0	72.9	77.2	12 100	74.4	76.8	12 500	75.9	75.9	13 000	26.0
28.0	71.4	76.5	10 600	72.9	76.1	11 000	74.4	75.2	11 500	28.0
32.0	68.3	75.0	8 300	69.8	74.5	8 700	71.2	73.7	9 100	32.0
36.0	65.1	73.2	6 600	66.6	72.7	6 900	68.0	71.8	7 200	36.0
40.0	61.8	71.1	5 200	63.3	70.6	5 500	64.7	69.7	5 700	40.0
44.0	58.5	68.7	4 100	59.9	68.3	4 300	61.2	67.3	4 500	44.0
48.0	55.0	66.0	3 200	56.4	65.5	3 400	57.7	64.5	3 600	48.0
52.0	51.3	62.9	2 400	52.7	62.4	2 500	53.9	61.3	2 700	52.0
56.0				48.8	58.8	1 900	49.9	57.7	2 000	56.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

15.2m (50 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
27.4m (90 Ft.) BOOM										
10.7	79.7	43.5	19 000 *							10.7
12.0	77.8	43.2	18 500 *							12.0
14.0	75.0	42.6	17 800 *	78.7	42.2	16 300 *				14.0
16.0	72.2	42.0	17 200 *	75.8	41.6	15 800 *				16.0
18.0	69.3	41.2	16 600 *	72.9	40.8	15 300 *	77.0	40.1	12 800 *	18.0
20.0	66.4	40.3	16 100 *	69.9	39.9	14 900 *	73.9	39.1	12 100 *	20.0
22.0	63.4	39.2	15 600 *	66.9	38.8	14 600 *	70.8	38.1	11 400 *	22.0
24.0	60.2	38.1	15 100 *	63.7	37.7	14 100 *	67.6	36.9	10 900 *	24.0
26.0	57.0	36.8	14 000	60.5	36.3	13 400 *	64.3	35.6	10 400 *	26.0
28.0	53.7	35.3	12 600	57.1	34.8	12 600	60.8	34.0	9 900 *	28.0
32.0	46.4	31.7	10 300	49.7	31.2	10 500	53.2	30.3	9 200 *	32.0
36.0	38.1	26.9	8 600	41.2	26.3	8 700				36.0
40.0	27.6	20.2	7 100							40.0
30.5m (100 Ft.) BOOM										
10.7	80.4	46.6	19 100 *							10.7
12.0	78.7	46.3	18 700 *							12.0
14.0	76.1	45.8	18 000 *	79.5	45.4	16 400 *				14.0
16.0	73.4	45.2	17 400 *	76.8	44.8	16 000 *				16.0
18.0	70.8	44.5	16 900 *	74.1	44.1	15 500 *	77.9	43.3	13 000 *	18.0
20.0	68.1	43.6	16 400 *	71.4	43.2	15 200 *	75.1	42.5	12 400 *	20.0
22.0	65.3	42.7	15 900 *	68.6	42.3	14 700 *	72.3	41.5	11 800 *	22.0
24.0	62.4	41.6	15 400	65.7	41.2	14 400 *	69.3	40.4	11 200 *	24.0
26.0	59.5	40.4	13 900	62.7	40.0	14 100	66.3	39.2	10 700 *	26.0
28.0	56.5	39.1	12 500	59.7	38.6	12 800	63.2	37.8	10 200 *	28.0
32.0	50.1	35.9	10 200	53.2	35.4	10 400	56.5	34.5	9 500 *	32.0
36.0	42.9	31.8	8 500	45.9	31.3	8 600	49.1	30.3	8 800	36.0
40.0	34.6	26.5	7 100	37.3	25.8	7 200				40.0
44.0	23.5	18.7	5 900							44.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

15.2m (50 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
33.5m (110 Ft.) BOOM										
10.7	81.0	49.7	19 300*							10.7
12.0	79.4	49.4	18 900*							12.0
14.0	77.0	49.0	18 200*	80.1	48.6	16 600*				14.0
16.0	74.5	48.4	17 700*	77.7	48.0	16 100*				16.0
18.0	72.0	47.7	17 100*	75.2	47.3	15 700*	78.7	46.5	13 100*	18.0
20.0	69.5	46.9	16 600*	72.6	46.5	15 300*	76.2	45.7	12 600*	20.0
22.0	67.0	46.1	16 200*	70.0	45.6	15 000*	73.5	44.9	12 000*	22.0
24.0	64.3	45.1	15 400	67.4	44.7	14 600*	70.8	43.9	11 500*	24.0
26.0	61.7	44.0	13 800	64.7	43.5	14 100	68.1	42.7	11 000*	26.0
28.0	58.9	42.8	12 300	61.9	42.3	12 600	65.2	41.5	10 500*	28.0
32.0	53.1	39.9	10 100	56.0	39.4	10 300	59.2	38.5	9 700*	32.0
36.0	46.8	36.3	8 300	49.6	35.7	8 500	52.6	34.8	8 700	36.0
40.0	39.7	31.8	6 900	42.4	31.1	7 100				40.0
44.0	31.2	25.7	5 800	33.6	24.9	5 900				44.0
36.6m (120 Ft.) BOOM										
12.2	79.8	52.5	19 000*							12.2
14.0	77.8	52.1	18 500*							14.0
16.0	75.5	51.6	17 900*	78.4	51.2	16 300*				16.0
18.0	73.1	50.9	17 400*	76.1	50.5	15 800*	79.5	49.7	13 100*	18.0
20.0	70.8	50.2	16 900*	73.7	49.8	15 500*	77.0	49.0	12 800*	20.0
22.0	68.4	49.4	16 400*	71.3	49.0	15 100*	74.6	48.2	12 300*	22.0
24.0	66.0	48.5	15 400	68.9	48.1	14 800*	72.1	47.2	11 700*	24.0
26.0	63.5	47.5	13 600	66.3	47.0	14 000	69.5	46.2	11 200*	26.0
28.0	60.9	46.3	12 200	63.8	45.9	12 500	66.9	45.1	10 800*	28.0
32.0	55.6	43.7	9 900	58.4	43.2	10 200	61.5	42.4	10 000*	32.0
36.0	49.9	40.5	8 200	52.7	39.9	8 400	55.6	39.0	8 600	36.0
40.0	43.7	36.5	6 800	46.3	35.9	7 000	49.0	34.9	7 200	40.0
44.0	36.6	31.5	5 700	39.0	30.8	5 800				44.0
48.0	27.9	24.7	4 700							48.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

15.2m (50 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
39.6m (130 Ft.) BOOM										
12.2	80.4	55.6	19 100 *							12.2
14.0	78.4	55.2	18 600 *							14.0
16.0	76.3	54.7	18 100 *	79.1	54.3	16 400*				16.0
18.0	74.1	54.1	17 600 *	76.9	53.7	16 000*				18.0
20.0	71.9	53.5	17 100 *	74.7	53.0	15 600*	77.8	52.2	12 900*	20.0
22.0	69.7	52.7	16 600	72.4	52.3	15 300*	75.5	51.4	12 500*	22.0
24.0	67.4	51.9	15 300	70.1	51.4	15 000*	73.2	50.6	11 900*	24.0
26.0	65.1	50.9	13 400	67.8	50.5	13 900	70.8	49.6	11 500*	26.0
28.0	62.7	49.9	12 000	65.4	49.4	12 400	68.4	48.6	11 000*	28.0
32.0	57.8	47.4	9 700	60.5	46.9	10 000	63.4	46.1	10 200*	32.0
36.0	52.6	44.5	8 000	55.2	44.0	8 200	58.0	43.1	8 500	36.0
40.0	47.0	40.9	6 600	49.5	40.3	6 800	52.2	39.4	7 000	40.0
44.0	40.8	36.5	5 500	43.2	35.9	5 700	45.7	34.8	5 800	44.0
48.0	33.6	30.9	4 600	35.9	30.2	4 700				48.0
42.7m (140 Ft.) BOOM										
12.2	80.9	58.7	19 300 *							12.2
14.0	79.1	58.4	18 800 *							14.0
16.0	77.0	57.9	18 300 *	79.7	57.5	16 500*				16.0
18.0	75.0	57.3	17 800 *	77.6	56.9	16 100*				18.0
20.0	72.9	56.7	17 300 *	75.5	56.3	15 700*	78.5	55.4	13 000*	20.0
22.0	70.8	56.0	16 700	73.4	55.5	15 400*	76.4	54.7	12 700*	22.0
24.0	68.7	55.2	15 100	71.3	54.7	15 100*	74.2	53.9	12 200*	24.0
26.0	66.5	54.3	13 300	69.1	53.8	13 800	72.0	53.0	11 700*	26.0
28.0	64.3	53.3	11 900	66.8	52.8	12 300	69.7	52.0	11 300*	28.0
32.0	59.7	51.0	9 600	62.3	50.6	9 900	65.0	49.7	10 300	32.0
36.0	55.0	48.3	7 900	57.4	47.8	8 100	60.1	46.9	8 400	36.0
40.0	49.8	45.1	6 500	52.2	44.5	6 700	54.8	43.6	6 900	40.0
44.0	44.3	41.2	5 400	46.6	40.5	5 600	49.0	39.5	5 800	44.0
48.0	38.1	36.3	4 500	40.3	35.6	4 600				48.0
52.0	30.8	30.2	3 700							52.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

15.2m (50 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
45.7m (150 Ft.) BOOM										
13.7	79.9	61.5	19 000 *							13.7
14.0	79.6	61.5	18 900 *							14.0
16.0	77.7	61.0	18 400 *							16.0
18.0	75.7	60.5	18 000 *	78.3	60.1	16 200*				18.0
20.0	73.8	59.9	17 500 *	76.3	59.5	15 900*	79.1	58.6	13 100*	20.0
22.0	71.8	59.2	16 800	74.3	58.8	15 500*	77.1	57.9	12 800*	22.0
24.0	69.8	58.5	14 900	72.3	58.0	15 100	75.0	57.2	12 400*	24.0
26.0	67.8	57.6	13 200	70.2	57.2	13 600	72.9	56.3	11 900*	26.0
28.0	65.7	56.7	11 800	68.1	56.2	12 100	70.8	55.4	11 400*	28.0
32.0	61.4	54.6	9 500	63.8	54.1	9 800	66.5	53.2	10 200	32.0
36.0	57.0	52.1	7 700	59.3	51.6	8 000	61.9	50.7	8 300	36.0
40.0	52.3	49.1	6 400	54.6	48.5	6 600	57.0	47.6	6 800	40.0
44.0	47.2	45.5	5 200	49.5	44.9	5 400	51.8	43.9	5 600	44.0
48.0	41.7	41.2	4 300	43.9	40.6	4 500	46.1	39.5	4 600	48.0
52.0	35.5	36.0	3 500	37.5	35.2	3 600				52.0
56.0	28.0	29.1	2 900							56.0
48.8m (160 Ft.) BOOM										
13.7	80.4	64.6	19 100 *							13.7
14.0	80.1	64.6	19 100 *							14.0
16.0	78.3	64.2	18 600 *							16.0
18.0	76.4	63.7	18 100 *	78.8	63.2	16 300*				18.0
20.0	74.6	63.1	17 700 *	77.0	62.6	16 000*	79.7	61.8	13 100*	20.0
22.0	72.7	62.4	16 900	75.1	62.0	15 700*	77.8	61.1	12 900*	22.0
24.0	70.8	61.7	14 700	73.2	61.3	15 100	75.8	60.4	12 600*	24.0
26.0	68.9	60.9	13 000	71.2	60.5	13 500	73.8	59.6	12 100*	26.0
28.0	66.9	60.1	11 600	69.2	59.6	12 000	71.8	58.7	11 700*	28.0
32.0	62.9	58.1	9 300	65.2	57.6	9 700	67.7	56.7	10 100	32.0
36.0	58.8	55.7	7 600	61.0	55.2	7 900	63.5	54.3	8 200	36.0
40.0	54.4	52.9	6 200	56.6	52.4	6 400	59.0	51.5	6 700	40.0
44.0	49.8	49.7	5 100	51.9	49.1	5 300	54.2	48.1	5 500	44.0
48.0	44.8	45.8	4 100	46.9	45.2	4 300	49.0	44.1	4 500	48.0
52.0	39.3	41.1	3 400	41.3	40.4	3 500				52.0
56.0	33.0	35.4	2 700	34.9	34.6	2 800				56.0
60.0	25.3	27.8	2 100							60.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

15.2m (50 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
51.8m (170 Ft.) BOOM										
13.7	80.8	67.7	19 300 *							13.7
14.0	80.6	67.7	19 200 *							14.0
16.0	78.8	67.3	18 700 *							16.0
18.0	77.1	66.8	18 300 *	79.4	66.4	16 400*				18.0
20.0	75.3	66.3	17 900	77.6	65.8	16 100*	80.2	64.9	13 200*	20.0
22.0	73.5	65.7	16 800	75.8	65.2	15 800*	78.3	64.3	13 000*	22.0
24.0	71.7	65.0	14 600	74.0	64.5	15 000	76.5	63.6	12 700*	24.0
26.0	69.9	64.2	12 900	72.1	63.8	13 300	74.6	62.9	12 300*	26.0
28.0	68.0	63.4	11 400	70.3	62.9	11 900	72.7	62.0	11 900*	28.0
32.0	64.3	61.5	9 200	66.5	61.0	9 500	68.9	60.1	9 900	32.0
36.0	60.3	59.3	7 400	62.5	58.8	7 700	64.9	57.9	8 100	36.0
40.0	56.3	56.7	6 000	58.4	56.2	6 300	60.7	55.2	6 600	40.0
44.0	52.0	53.7	4 900	54.1	53.1	5 100	56.3	52.1	5 400	44.0
48.0	47.4	50.1	4 000	49.4	49.5	4 200	51.5	48.5	4 400	48.0
52.0	42.4	45.9	3 200	44.4	45.3	3 400	46.4	44.2	3 500	52.0
56.0	36.9	40.9	2 500	38.8	40.1	2 700				56.0
60.0	30.5	34.6	2 000							60.0
54.9m (180 Ft.) BOOM										
15.2	80.0	70.6	19 000 *							15.2
16.0	79.3	70.4	18 900 *							16.0
18.0	77.6	69.9	18 400 *	79.8	69.5	16 500*				18.0
20.0	76.0	69.4	18 000	78.1	69.0	16 200*	80.6	68.1	13 200*	20.0
22.0	74.3	68.8	16 700	76.4	68.4	15 900*	78.9	67.5	13 000*	22.0
24.0	72.5	68.2	14 500	74.7	67.7	15 000	77.1	66.8	12 800*	24.0
26.0	70.8	67.5	12 800	73.0	67.0	13 300	75.4	66.1	12 400*	26.0
28.0	69.0	66.7	11 300	71.2	66.2	11 800	73.6	65.3	12 000	28.0
32.0	65.5	64.9	9 000	67.6	64.4	9 400	69.9	63.5	9 800	32.0
36.0	61.8	62.8	7 300	63.9	62.3	7 600	66.1	61.4	8 000	36.0
40.0	57.9	60.4	5 900	60.0	59.9	6 200	62.2	58.9	6 500	40.0
44.0	53.9	57.6	4 800	55.9	57.0	5 000	58.1	56.0	5 300	44.0
48.0	49.7	54.3	3 900	51.7	53.7	4 100	53.7	52.7	4 300	48.0
52.0	45.2	50.4	3 100	47.1	49.8	3 300	49.0	48.7	3 400	52.0
56.0	40.2	45.9	2 400	42.1	45.2	2 600	43.9	44.0	2 700	56.0
60.0				36.4	39.6	2 000				60.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

15.2m (50 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
57.9m (190 Ft.) BOOM										
15.2	80.4	73.7	19 200 *							15.2
16.0	79.8	73.5	19 000 *							16.0
18.0	78.2	73.1	18 600 *							18.0
20.0	76.6	72.6	18 100	78.7	72.1	16 300*				20.0
22.0	74.9	72.0	16 500	77.0	71.6	16 000*	79.4	70.7	13 000*	22.0
24.0	73.3	71.4	14 300	75.4	71.0	15 000	77.7	70.0	12 700*	24.0
26.0	71.6	70.7	12 600	73.7	70.3	13 100	76.0	69.4	12 400*	26.0
28.0	70.0	70.0	11 200	72.0	69.5	11 600	74.3	68.6	12 000	28.0
32.0	66.6	68.3	8 900	68.6	67.8	9 300	70.8	66.9	9 700	32.0
36.0	63.1	66.3	7 100	65.1	65.8	7 400	67.3	64.9	7 800	36.0
40.0	59.4	64.0	5 700	61.4	63.5	6 000	63.5	62.5	6 400	40.0
44.0	55.7	61.4	4 600	57.6	60.8	4 900	59.7	59.8	5 200	44.0
48.0	51.7	58.3	3 700	53.6	57.7	3 900	55.6	56.7	4 200	48.0
52.0	47.5	54.7	2 900	49.4	54.1	3 100	51.3	53.1	3 300	52.0
56.0	43.0	50.6	2 300	44.8	49.9	2 400	46.6	48.8	2 600	56.0
61.0m (200 Ft.) BOOM										
15.2	80.8	76.8	19 300 *							15.2
16.0	80.2	76.6	19 100 *							16.0
18.0	78.7	76.2	18 700 *							18.0
20.0	77.1	75.7	18 200	79.1	75.3	16 300*				20.0
22.0	75.6	75.2	16 300	77.6	74.7	16 000	79.8	73.8	12 700*	22.0
24.0	74.0	74.6	14 200	76.0	74.1	14 900	78.2	73.2	12 500*	24.0
26.0	72.4	74.0	12 400	74.4	73.5	13 000	76.6	72.6	12 200*	26.0
28.0	70.8	73.3	11 000	72.8	72.8	11 500	75.0	71.9	11 800	28.0
32.0	67.6	71.6	8 700	69.5	71.2	9 100	71.7	70.2	9 600	32.0
36.0	64.2	69.8	7 000	66.2	69.3	7 300	68.3	68.3	7 700	36.0
40.0	60.8	67.6	5 600	62.7	67.1	5 900	64.8	66.1	6 300	40.0
44.0	57.3	65.1	4 500	59.1	64.5	4 700	61.1	63.5	5 000	44.0
48.0	53.5	62.2	3 600	55.4	61.6	3 800	57.3	60.6	4 000	48.0
52.0	49.6	58.9	2 800	51.4	58.3	3 000	53.3	57.2	3 200	52.0
56.0	45.5	55.1	2 100	47.2	54.4	2 300	49.0	53.3	2 500	56.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

15.2m (50 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
64.0m (210 Ft.) BOOM										
16.8	80.0	79.6	18 900 *							16.8
18.0	79.1	79.3	18 700 *							18.0
20.0	77.6	78.9	18 300	79.6	78.4	16 400*				20.0
22.0	76.1	78.4	16 100	78.1	77.9	16 100	80.2	77.0	12 500*	22.0
24.0	74.6	77.8	14 000	76.5	77.3	14 700	78.7	76.4	12 200*	24.0
26.0	73.1	77.2	12 300	75.0	76.7	12 800	77.2	75.8	12 000*	26.0
28.0	71.6	76.5	10 900	73.5	76.0	11 400	75.6	75.1	11 700	28.0
32.0	68.5	75.0	8 600	70.4	74.5	9 000	72.4	73.5	9 500	32.0
36.0	65.3	73.2	6 800	67.2	72.7	7 200	69.2	71.7	7 600	36.0
40.0	62.0	71.1	5 400	63.9	70.6	5 700	65.9	69.6	6 100	40.0
44.0	58.7	68.7	4 300	60.5	68.2	4 600	62.4	67.2	4 900	44.0
48.0	55.2	66.0	3 400	57.0	65.4	3 600	58.8	64.4	3 900	48.0
52.0	51.5	62.9	2 600	53.3	62.3	2 800	55.1	61.3	3 000	52.0
56.0	47.7	59.3	2 000	49.4	58.7	2 100	51.1	57.6	2 300	56.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

18.3m (60 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
27.4m (90 Ft.) BOOM										
10.7	80.8	46.7	13 600 *							10.7
12.0	79.1	46.4	13 600 *							12.0
14.0	76.5	45.9	13 500 *	80.6	45.5	12 600*				14.0
16.0	73.9	45.3	13 300 *	78.0	44.9	12 200*				16.0
18.0	71.2	44.6	12 800 *	75.3	44.2	11 800*				18.0
20.0	68.5	43.8	12 400 *	72.6	43.4	11 400*	76.7	42.4	10 500*	20.0
22.0	65.8	42.8	12 000 *	69.8	42.4	11 100*	73.8	41.5	10 200*	22.0
24.0	62.9	41.8	11 600 *	66.9	41.4	10 800*	70.9	40.4	9 600*	24.0
26.0	60.0	40.6	11 200 *	64.0	40.2	10 500*	67.9	39.2	9 000*	26.0
28.0	57.0	39.3	10 900 *	60.9	38.8	10 200*	64.7	37.8	8 600*	28.0
32.0	50.6	36.1	10 200 *	54.4	35.6	9 700*	58.1	34.5	7 800*	32.0
36.0	43.6	32.2	8 700	47.2	31.6	8 900	50.6	30.3	7 200*	36.0
40.0	35.3	26.9	7 300	38.8	26.2	7 400				40.0
44.0	24.6	19.4	6 200							44.0
30.5m (100 Ft.) BOOM										
12.2	79.6	49.5	13 600 *							12.2
14.0	77.4	49.0	13 600 *							14.0
16.0	74.9	48.5	13 400 *	78.8	48.1	12 300*				16.0
18.0	72.5	47.8	13 000 *	76.3	47.4	11 900*				18.0
20.0	70.0	47.1	12 600 *	73.7	46.6	11 600*	77.6	45.7	10 600*	20.0
22.0	67.4	46.2	12 200 *	71.1	45.8	11 300*	75.0	44.8	10 400*	22.0
24.0	64.8	45.2	11 800 *	68.5	44.8	10 900*	72.3	43.8	9 900*	24.0
26.0	62.1	44.2	11 500 *	65.8	43.7	10 600*	69.5	42.7	9 300*	26.0
28.0	59.4	43.0	11 100 *	63.0	42.5	10 400*	66.6	41.4	8 800*	28.0
32.0	53.6	40.1	10 300	57.2	39.6	9 900*	60.6	38.5	8 000*	32.0
36.0	47.3	36.6	8 600	50.8	36.0	8 800	54.1	34.8	7 400*	36.0
40.0	40.3	32.1	7 200	43.7	31.5	7 400	46.6	30.1	6 900*	40.0
44.0	31.9	26.3	6 100	35.1	25.5	6 200				44.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

18.3m (60 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
33.5m (110 Ft.) BOOM										
12.2	80.2	52.6	13 600 *							12.2
14.0	78.1	52.2	13 600 *							14.0
16.0	75.9	51.7	13 500 *	79.5	51.2	12 400*				16.0
18.0	73.5	51.0	13 200 *	77.1	50.6	12 100*				18.0
20.0	71.2	50.3	12 800 *	74.8	49.9	11 700*	78.4	48.9	10 700*	20.0
22.0	68.8	49.5	12 400 *	72.3	49.1	11 400*	75.9	48.1	10 400*	22.0
24.0	66.4	48.6	12 100 *	69.9	48.2	11 100*	73.4	47.2	10 100*	24.0
26.0	63.9	47.6	11 700 *	67.4	47.2	10 800*	70.9	46.2	9 600*	26.0
28.0	61.4	46.5	11 400 *	64.8	46.1	10 500*	68.3	45.0	9 100*	28.0
32.0	56.1	43.9	10 200	59.5	43.4	10 100*	62.8	42.3	8 300*	32.0
36.0	50.4	40.7	8 400	53.8	40.2	8 700	56.9	39.0	7 700*	36.0
40.0	44.2	36.8	7 000	47.5	36.2	7 300	50.4	34.9	7 100*	40.0
44.0	37.2	31.9	5 900	40.3	31.2	6 100				44.0
48.0	28.6	25.3	5 000							48.0
36.6m (120 Ft.) BOOM										
12.2	80.7	55.7	13 600 *							12.2
14.0	78.8	55.3	13 600 *							14.0
16.0	76.7	54.8	13 600 *	80.1	54.4	12 500*				16.0
18.0	74.5	54.2	13 300 *	77.9	53.8	12 200*				18.0
20.0	72.3	53.6	13 000 *	75.7	53.1	11 800*	79.1	52.2	10 800*	20.0
22.0	70.1	52.8	12 600 *	73.4	52.4	11 600*	76.8	51.4	10 500*	22.0
24.0	67.8	52.0	12 300 *	71.1	51.5	11 300*	74.5	50.5	10 300*	24.0
26.0	65.5	51.1	12 000 *	68.8	50.6	11 000*	72.1	49.6	9 800*	26.0
28.0	63.1	50.0	11 600 *	66.4	49.5	10 700*	69.7	48.5	9 300*	28.0
32.0	58.3	47.6	10 000	61.5	47.1	10 200*	64.6	46.0	8 500*	32.0
36.0	53.1	44.7	8 300	56.3	44.2	8 600	59.2	43.0	7 900*	36.0
40.0	47.5	41.2	6 900	50.6	40.6	7 100	53.4	39.3	7 300	40.0
44.0	41.4	36.9	5 800	44.3	36.2	6 000	46.9	34.7	6 100	44.0
48.0	34.3	31.4	4 900	37.1	30.6	5 000				48.0
52.0	25.4	23.9	4 100							52.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

18.3m (60 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
39.6m (130 Ft.) BOOM										
13.7	79.7	58.5	13 600 *							13.7
14.0	79.4	58.4	13 600 *							14.0
16.0	77.4	58.0	13 600 *							16.0
18.0	75.3	57.4	13 400 *	78.5	57.0	12 300*				18.0
20.0	73.3	56.8	13 100 *	76.4	56.3	12 000*	79.7	55.3	10 900*	20.0
22.0	71.2	56.1	12 800 *	74.3	55.6	11 600*	77.6	54.6	10 600*	22.0
24.0	69.0	55.3	12 500 *	72.2	54.8	11 400*	75.4	53.8	10 400*	24.0
26.0	66.9	54.4	12 100 *	70.0	54.0	11 100*	73.1	52.9	10 000*	26.0
28.0	64.7	53.5	11 800	67.8	53.0	10 900*	70.9	51.9	9 600*	28.0
32.0	60.1	51.2	9 900	63.2	50.7	10 200	66.2	49.6	8 800*	32.0
36.0	55.4	48.5	8 100	58.4	48.0	8 400	61.3	46.8	8 100*	36.0
40.0	50.3	45.3	6 700	53.2	44.8	7 000	56.0	43.5	7 200	40.0
44.0	44.8	41.5	5 600	47.7	40.8	5 800	50.2	39.4	6 000	44.0
48.0	38.6	36.7	4 700	41.4	36.0	4 900				48.0
52.0	31.4	30.7	3 900	34.0	29.8	4 000				52.0
56.0	22.1	22.2	3 200							56.0
42.7m (140 Ft.) BOOM										
13.7	80.2	61.6	13 600 *							13.7
14.0	80.0	61.5	13 600 *							14.0
16.0	78.0	61.1	13 600 *							16.0
18.0	76.1	60.6	13 600 *	79.1	60.1	12 400*				18.0
20.0	74.1	60.0	13 300 *	77.2	59.5	12 100*	80.3	58.5	10 900*	20.0
22.0	72.1	59.3	12 900 *	75.2	58.9	11 800*	78.2	57.8	10 700*	22.0
24.0	70.1	58.6	12 600 *	73.1	58.1	11 500*	76.2	57.1	10 500*	24.0
26.0	68.1	57.8	12 300 *	71.1	57.3	11 200*	74.1	56.2	10 200*	26.0
28.0	66.0	56.9	11 900	69.0	56.4	11 000*	72.0	55.3	9 800*	28.0
32.0	61.8	54.8	9 700	64.7	54.3	10 100	67.6	53.1	9 000*	32.0
36.0	57.4	52.3	8 000	60.2	51.7	8 300	63.0	50.6	8 300*	36.0
40.0	52.7	49.3	6 600	55.5	48.8	6 900	58.1	47.5	7 100	40.0
44.0	47.7	45.8	5 500	50.4	45.2	5 700	52.9	43.8	5 900	44.0
48.0	42.2	41.6	4 600	44.9	40.9	4 800	47.2	39.4	4 900	48.0
52.0	36.0	36.4	3 800	38.6	35.6	3 900				52.0
56.0	28.7	29.7	3 100							56.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

18.3m (60 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
45.7m (150 Ft.) BOOM										
13.7	80.7	64.7	13 600 *							13.7
14.0	80.4	64.7	13 600 *							14.0
16.0	78.6	64.2	13 600 *							16.0
18.0	76.8	63.7	13 600 *	79.7	63.3	12 500*				18.0
20.0	74.9	63.2	13 400 *	77.8	62.7	12 200*	80.8	61.7	11 000*	20.0
22.0	73.0	62.6	13 100 *	75.9	62.1	11 900*	78.8	61.0	10 800*	22.0
24.0	71.1	61.9	12 800 *	74.0	61.4	11 600*	76.9	60.3	10 500*	24.0
26.0	69.2	61.1	12 500	72.1	60.6	11 400*	74.9	59.5	10 300*	26.0
28.0	67.3	60.2	12 000	70.1	59.7	11 100*	72.9	58.6	10 000*	28.0
32.0	63.3	58.3	9 600	66.1	57.7	10 000	68.8	56.6	9 200*	32.0
36.0	59.1	55.9	7 800	61.9	55.4	8 200	64.5	54.2	8 400	36.0
40.0	54.8	53.2	6 500	57.5	52.6	6 700	60.0	51.4	7 000	40.0
44.0	50.2	49.9	5 300	52.8	49.3	5 600	55.2	48.0	5 800	44.0
48.0	45.2	46.1	4 400	47.8	45.5	4 600	50.1	44.0	4 800	48.0
52.0	39.7	41.5	3 600	42.2	40.8	3 800				52.0
56.0	33.5	35.8	3 000	35.9	35.0	3 100				56.0
60.0	26.0	28.4	2 400							60.0
48.8m (160 Ft.) BOOM										
15.2	79.8	67.5	13 600 *							15.2
16.0	79.1	67.4	13 600 *							16.0
18.0	77.4	66.9	13 600 *							18.0
20.0	75.6	66.4	13 500 *	78.4	65.9	12 300*				20.0
22.0	73.8	65.8	13 200 *	76.6	65.3	12 000*	79.4	64.2	10 800*	22.0
24.0	72.0	65.1	12 900 *	74.8	64.6	11 700*	77.5	63.5	10 600*	24.0
26.0	70.2	64.4	12 600	72.9	63.9	11 500*	75.7	62.8	10 400*	26.0
28.0	68.4	63.5	11 800	71.1	63.0	11 200*	73.8	61.9	10 200*	28.0
32.0	64.6	61.7	9 400	67.3	61.2	9 800	69.9	60.0	9 400*	32.0
36.0	60.7	59.5	7 700	63.3	59.0	8 000	65.9	57.8	8 400	36.0
40.0	56.6	56.9	6 300	59.2	56.4	6 600	61.7	55.1	6 900	40.0
44.0	52.3	53.9	5 200	54.9	53.3	5 400	57.3	52.0	5 700	44.0
48.0	47.8	50.4	4 300	50.3	49.8	4 500	52.5	48.4	4 700	48.0
52.0	42.9	46.3	3 500	45.3	45.6	3 600	47.4	44.0	3 800	52.0
56.0	37.4	41.3	2 800	39.7	40.5	3 000				56.0
60.0	31.1	35.1	2 200	33.3	34.2	2 300				60.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

18.3m (60 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
51.8m (170 Ft.) BOOM										
15.2	80.2	70.6	13 600 *							15.2
16.0	79.6	70.5	13 600 *							16.0
18.0	77.9	70.0	13 600 *							18.0
20.0	76.3	69.5	13 500 *	78.9	69.0	12 300*				20.0
22.0	74.6	68.9	13 400 *	77.2	68.5	12 100*	79.9	67.4	10 900*	22.0
24.0	72.8	68.3	13 100 *	75.5	67.8	11 800*	78.1	66.7	10 700*	24.0
26.0	71.1	67.6	12 800	73.7	67.1	11 600*	76.3	66.0	10 500*	26.0
28.0	69.4	66.8	11 600	71.9	66.3	11 400*	74.5	65.2	10 300*	28.0
32.0	65.8	65.1	9 300	68.3	64.6	9 700	70.9	63.4	9 600*	32.0
36.0	62.1	63.0	7 500	64.6	62.5	7 900	67.1	61.3	8 300	36.0
40.0	58.3	60.6	6 100	60.8	60.0	6 400	63.2	58.8	6 800	40.0
44.0	54.3	57.8	5 000	56.7	57.2	5 300	59.0	55.9	5 500	44.0
48.0	50.1	54.5	4 100	52.5	53.9	4 300	54.7	52.5	4 500	48.0
52.0	45.6	50.7	3 300	47.9	50.1	3 500	50.0	48.6	3 700	52.0
56.0	40.6	46.3	2 600	42.9	45.5	2 800	44.8	43.9	2 900	56.0
60.0	35.2	40.9	2 100	37.3	40.0	2 200				60.0
54.9m (180 Ft.) BOOM										
15.2	80.7	73.7	13 600 *							15.2
16.0	80.1	73.6	13 600 *							16.0
18.0	78.5	73.1	13 600 *							18.0
20.0	76.8	72.7	13 600 *	79.4	72.2	12 400*				20.0
22.0	75.2	72.1	13 500 *	77.7	71.6	12 200*	80.3	70.6	10 900*	22.0
24.0	73.6	71.5	13 200 *	76.1	71.0	11 900*	78.6	69.9	10 700*	24.0
26.0	71.9	70.8	12 900	74.4	70.4	11 700*	77.0	69.2	10 600*	26.0
28.0	70.3	70.1	11 500	72.7	69.6	11 400*	75.2	68.5	10 400*	28.0
32.0	66.9	68.4	9 200	69.3	67.9	9 600	71.8	66.8	9 700*	32.0
36.0	63.4	66.5	7 400	65.8	65.9	7 800	68.2	64.8	8 200	36.0
40.0	59.8	64.2	6 000	62.2	63.6	6 300	64.5	62.4	6 700	40.0
44.0	56.0	61.6	4 900	58.4	61.0	5 200	60.6	59.7	5 500	44.0
48.0	52.1	58.5	4 000	54.4	57.9	4 200	56.5	56.6	4 400	48.0
52.0	47.9	55.0	3 200	50.2	54.4	3 400	52.2	52.9	3 600	52.0
56.0	43.4	50.9	2 500	45.6	50.2	2 700	47.5	48.7	2 900	56.0
60.0	38.5	46.1	2 000	40.7	45.3	2 100				60.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

18.3m (60 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
57.9m (190 Ft.) BOOM										
16.8	79.9	76.5	13 600 *							16.8
18.0	78.9	76.3	13 600 *							18.0
20.0	77.4	75.8	13 600 *	79.8	75.3	12 400*				20.0
22.0	75.8	75.3	13 500 *	78.2	74.8	12 200*				22.0
24.0	74.3	74.7	13 300 *	76.7	74.2	12 000*	79.1	73.1	10 700*	24.0
26.0	72.7	74.1	12 700	75.1	73.6	11 800*	77.5	72.5	10 400*	26.0
28.0	71.1	73.4	11 300	73.5	72.9	11 500	75.9	71.7	10 200*	28.0
32.0	67.8	71.8	9 000	70.2	71.3	9 400	72.6	70.1	9 700*	32.0
36.0	64.5	69.9	7 200	66.9	69.4	7 600	69.2	68.2	8 100	36.0
40.0	61.1	67.7	5 900	63.4	67.2	6 200	65.6	66.0	6 500	40.0
44.0	57.6	65.3	4 700	59.8	64.7	5 000	62.0	63.4	5 300	44.0
48.0	53.9	62.4	3 800	56.1	61.8	4 100	58.2	60.5	4 300	48.0
52.0	50.0	59.1	3 000	52.2	58.5	3 200	54.2	57.1	3 500	52.0
56.0	45.8	55.4	2 400	48.0	54.7	2 500	49.9	53.2	2 700	56.0
60.0				43.5	50.2	2 000	45.2	48.6	2 100	60.0
61.0m (200 Ft.) BOOM										
16.8	80.3	79.6	13 600 *							16.8
18.0	79.4	79.4	13 600 *							18.0
20.0	77.9	78.9	13 600 *	80.2	78.5	12 500*				20.0
22.0	76.4	78.4	13 600 *	78.7	77.9	12 300*				22.0
24.0	74.9	77.9	13 400 *	77.2	77.4	12 100*	79.6	76.3	10 500*	24.0
26.0	73.4	77.3	12 600	75.7	76.8	11 800*	78.0	75.7	10 200*	26.0
28.0	71.8	76.6	11 100	74.1	76.1	11 500	76.5	75.0	10 000*	28.0
32.0	68.7	75.1	8 800	71.0	74.6	9 300	73.3	73.4	9 700*	32.0
36.0	65.6	73.3	7 100	67.8	72.8	7 500	70.1	71.6	7 900	36.0
40.0	62.3	71.2	5 700	64.6	70.7	6 000	66.7	69.5	6 400	40.0
44.0	59.0	68.9	4 600	61.2	68.3	4 900	63.3	67.1	5 200	44.0
48.0	55.5	66.2	3 600	57.7	65.6	3 900	59.7	64.3	4 200	48.0
52.0	51.8	63.1	2 900	54.0	62.5	3 100	55.9	61.1	3 300	52.0
56.0	48.0	59.6	2 200	50.1	59.0	2 400	51.9	57.5	2 600	56.0
60.0							47.6	53.3	2 000	60.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

18.3m (60 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
64.0m (210 Ft.) BOOM										
16.8	80.6	82.7	13 600 *							16.8
18.0	79.8	82.5	13 600 *							18.0
20.0	78.3	82.1	13 600 *	80.6	81.6	12 600*				20.0
22.0	76.9	81.6	13 600 *	79.1	81.1	12 300*				22.0
24.0	75.5	81.1	13 500 *	77.7	80.6	12 100*	80.0	79.4	10 300*	24.0
26.0	74.0	80.5	12 500	76.2	80.0	11 900*	78.5	78.8	10 100*	26.0
28.0	72.5	79.8	11 000	74.8	79.3	11 600	77.0	78.2	9 900*	28.0
32.0	69.6	78.4	8 700	71.8	77.8	9 200	74.0	76.7	9 500*	32.0
36.0	66.5	76.7	6 900	68.7	76.1	7 400	70.9	74.9	7 800	36.0
40.0	63.4	74.7	5 500	65.6	74.2	5 900	67.7	72.9	6 300	40.0
44.0	60.3	72.5	4 400	62.4	71.9	4 700	64.4	70.6	5 100	44.0
48.0	56.9	69.9	3 500	59.1	69.3	3 800	61.0	68.0	4 000	48.0
52.0	53.5	67.0	2 700	55.6	66.4	3 000	57.5	65.0	3 200	52.0
56.0	49.9	63.7	2 000	51.9	63.1	2 200	53.8	61.6	2 500	56.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

21.3m (70 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
27.4m (90 Ft.) BOOM										
12.2	79.4	49.5	11 900 *							12.2
14.0	77.2	49.1	11 500 *							14.0
16.0	74.7	48.5	11 100 *	79.2	48.1	10 300 *				16.0
18.0	72.3	47.8	10 800 *	76.8	47.5	10 000 *				18.0
20.0	69.8	47.1	10 400 *	74.2	46.7	9 700 *	78.8	45.8	8 900 *	20.0
22.0	67.2	46.2	10 100 *	71.6	45.8	9 400 *	76.2	44.9	8 700 *	22.0
24.0	64.6	45.3	9 800 *	69.0	44.9	9 100 *	73.5	43.9	8 500 *	24.0
26.0	61.9	44.2	9 500 *	66.3	43.8	8 800 *	70.8	42.8	8 000 *	26.0
28.0	59.2	43.0	9 200 *	63.5	42.5	8 600 *	67.9	41.5	7 600 *	28.0
32.0	53.4	40.1	8 600 *	57.7	39.7	8 100 *	61.9	38.6	6 800 *	32.0
36.0	47.1	36.6	8 100 *	51.3	36.1	7 800 *	55.3	34.9	6 200 *	36.0
40.0	40.1	32.2	7 500	44.2	31.6	7 300 *	47.9	30.1	5 800 *	40.0
44.0	31.8	26.3	6 300	35.6	25.5	6 500				44.0
30.5m (100 Ft.) BOOM										
12.2	80.0	52.6	12 000 *							12.2
14.0	78.0	52.2	11 700 *							14.0
16.0	75.7	51.7	11 300 *	79.9	51.3	10 400 *				16.0
18.0	73.4	51.1	11 000 *	77.6	50.7	10 100 *				18.0
20.0	71.0	50.4	10 600 *	75.2	49.9	9 800 *	79.6	49.0	9 000 *	20.0
22.0	68.6	49.6	10 300 *	72.8	49.1	9 500 *	77.1	48.2	8 800 *	22.0
24.0	66.2	48.7	10 000 *	70.4	48.2	9 200 *	74.6	47.2	8 600 *	24.0
26.0	63.7	47.7	9 700 *	67.9	47.2	9 000 *	72.1	46.2	8 300 *	26.0
28.0	61.2	46.5	9 400 *	65.3	46.1	8 700 *	69.4	45.0	7 800 *	28.0
32.0	55.9	43.9	8 800 *	60.0	43.5	8 300 *	64.0	42.4	7 100 *	32.0
36.0	50.3	40.8	8 400 *	54.3	40.3	7 900 *	58.1	39.0	6 500 *	36.0
40.0	44.1	36.9	7 400	48.0	36.3	7 500	51.6	34.9	6 000 *	40.0
44.0	37.0	31.9	6 200	40.8	31.2	6 400	44.0	29.6	5 600 *	44.0
48.0	28.5	25.3	5 300	32.0	24.4	5 400				48.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

21.3m (70 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
33.5m (110 Ft.) BOOM										
12.2	80.6	55.7	12 100 *							12.2
14.0	78.6	55.3	11 800 *							14.0
16.0	76.5	54.8	11 400 *							16.0
18.0	74.3	54.3	11 100 *	78.3	53.8	10 200*				18.0
20.0	72.1	53.6	10 800 *	76.1	53.2	9 900*	80.2	52.2	9 000*	20.0
22.0	69.9	52.8	10 500 *	73.8	52.4	9 600*	77.9	51.4	8 800*	22.0
24.0	67.6	52.0	10 200 *	71.5	51.6	9 400*	75.6	50.5	8 600*	24.0
26.0	65.3	51.1	9 900 *	69.2	50.6	9 100*	73.2	49.6	8 400*	26.0
28.0	63.0	50.0	9 600 *	66.8	49.6	8 900*	70.8	48.5	8 000*	28.0
32.0	58.1	47.6	9 100 *	61.9	47.2	8 500*	65.7	46.0	7 300*	32.0
36.0	52.9	44.7	8 500	56.7	44.2	8 100*	60.4	43.0	6 700*	36.0
40.0	47.4	41.2	7 200	51.1	40.7	7 400	54.5	39.3	6 200*	40.0
44.0	41.2	36.9	6 100	44.8	36.3	6 300	48.0	34.8	5 800*	44.0
48.0	34.1	31.4	5 100	37.6	30.7	5 300				48.0
52.0	25.3	24.0	4 300							52.0
36.6m (120 Ft.) BOOM										
13.7	79.5	58.5	11 900 *							13.7
14.0	79.3	58.5	11 900 *							14.0
16.0	77.2	58.0	11 600 *							16.0
18.0	75.2	57.4	11 200 *	78.9	57.0	10 300*				18.0
20.0	73.1	56.8	10 900 *	76.9	56.4	10 000*	80.8	55.4	9 100*	20.0
22.0	71.0	56.1	10 600 *	74.7	55.7	9 700*	78.6	54.6	8 900*	22.0
24.0	68.9	55.3	10 300 *	72.6	54.9	9 500*	76.4	53.8	8 700*	24.0
26.0	66.7	54.5	10 100 *	70.4	54.0	9 200*	74.2	52.9	8 500*	26.0
28.0	64.5	53.5	9 800 *	68.2	53.0	9 000*	71.9	51.9	8 300*	28.0
32.0	60.0	51.3	9 200 *	63.6	50.8	8 600*	67.2	49.6	7 500*	32.0
36.0	55.2	48.6	8 500	58.8	48.1	8 200*	62.3	46.9	6 900*	36.0
40.0	50.1	45.4	7 000	53.7	44.8	7 300	57.0	43.5	6 400*	40.0
44.0	44.6	41.5	5 900	48.1	40.9	6 100	51.2	39.5	6 000*	44.0
48.0	38.5	36.8	5 000	41.8	36.1	5 100	44.7	34.4	5 300	48.0
52.0	31.3	30.7	4 200	34.5	29.9	4 300				52.0
56.0	22.0	22.2	3 500							56.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

21.3m (70 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
39.6m (130 Ft.) BOOM										
13.7	80.1	61.6	12 100 *							13.7
14.0	79.8	61.6	12 000 *							14.0
16.0	77.9	61.1	11 700 *							16.0
18.0	75.9	60.6	11 300 *	79.5	60.2	10 300*				18.0
20.0	74.0	60.0	11 000 *	77.5	59.6	10 100*				20.0
22.0	72.0	59.4	10 800 *	75.5	58.9	9 800*	79.2	57.8	9 000*	22.0
24.0	70.0	58.6	10 500 *	73.5	58.2	9 600*	77.2	57.1	8 800*	24.0
26.0	68.0	57.8	10 200 *	71.5	57.3	9 400*	75.1	56.2	8 600*	26.0
28.0	65.9	56.9	10 000 *	69.4	56.4	9 100*	72.9	55.3	8 400*	28.0
32.0	61.6	54.8	9 400 *	65.1	54.3	8 700*	68.6	53.2	7 700*	32.0
36.0	57.2	52.3	8 200	60.6	51.8	8 300*	64.0	50.6	7 100*	36.0
40.0	52.5	49.3	6 900	55.9	48.8	7 100	59.1	47.5	6 600*	40.0
44.0	47.5	45.8	5 800	50.8	45.2	6 000	53.9	43.8	6 100*	44.0
48.0	42.1	41.6	4 800	45.3	41.0	5 000	48.2	39.4	5 200	48.0
52.0	35.9	36.4	4 000	39.0	35.7	4 200				52.0
56.0	28.6	29.7	3 400	31.5	28.8	3 500				56.0
42.7m (140 Ft.) BOOM										
13.7	80.5	64.7	12 200 *							13.7
14.0	80.3	64.7	12 100 *							14.0
16.0	78.5	64.2	11 800 *							16.0
18.0	76.6	63.8	11 500 *							18.0
20.0	74.8	63.2	11 200 *	78.2	62.8	10 200*				20.0
22.0	72.9	62.6	10 900 *	76.3	62.1	9 900*	79.8	61.0	9 000*	22.0
24.0	71.0	61.9	10 600 *	74.4	61.4	9 700*	77.8	60.3	8 800*	24.0
26.0	69.1	61.1	10 400 *	72.4	60.6	9 500*	75.8	59.5	8 700*	26.0
28.0	67.1	60.2	10 100 *	70.5	59.8	9 200*	73.8	58.6	8 500*	28.0
32.0	63.1	58.3	9 600 *	66.4	57.8	8 800*	69.7	56.6	7 900*	32.0
36.0	59.0	55.9	8 100	62.3	55.4	8 400	65.5	54.2	7 200*	36.0
40.0	54.6	53.2	6 700	57.9	52.7	7 000	61.0	51.4	6 800*	40.0
44.0	50.0	50.0	5 600	53.2	49.4	5 900	56.2	48.0	6 100	44.0
48.0	45.1	46.1	4 700	48.2	45.5	4 900	51.0	44.0	5 100	48.0
52.0	39.6	41.5	3 900	42.6	40.8	4 100	45.2	39.2	4 300	52.0
56.0	33.4	35.9	3 200	36.3	35.1	3 400				56.0
60.0	25.9	28.5	2 700							60.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

21.3m (70 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
45.7m (150 Ft.) BOOM										
13.7	81.0	67.8	12 200 *							13.7
14.0	80.7	67.8	12 200 *							14.0
16.0	79.0	67.4	11 900 *							16.0
18.0	77.2	66.9	11 600 *							18.0
20.0	75.5	66.4	11 300 *	78.7	65.9	10 200*				20.0
22.0	73.7	65.8	11 000 *	76.9	65.3	10 000*	80.3	64.2	9 100*	22.0
24.0	71.9	65.1	10 800 *	75.1	64.6	9 800*	78.4	63.5	8 900*	24.0
26.0	70.1	64.4	10 500 *	73.3	63.9	9 600*	76.5	62.8	8 700*	26.0
28.0	68.2	63.6	10 200 *	71.4	63.1	9 400*	74.7	61.9	8 500*	28.0
32.0	64.4	61.7	9 700	67.6	61.2	9 000*	70.8	60.0	8 100*	32.0
36.0	60.6	59.5	7 900	63.7	59.0	8 300	66.8	57.8	7 400*	36.0
40.0	56.5	56.9	6 500	59.6	56.4	6 900	62.6	55.1	6 900*	40.0
44.0	52.2	53.9	5 400	55.3	53.4	5 700	58.1	52.0	6 000	44.0
48.0	47.7	50.4	4 500	50.7	49.8	4 700	53.4	48.4	5 000	48.0
52.0	42.7	46.3	3 700	45.7	45.6	4 000	48.2	44.0	4 100	52.0
56.0	37.3	41.3	3 100	40.1	40.6	3 200	42.4	38.7	3 400	56.0
60.0	31.0	35.1	2 500	33.7	34.2	2 600				60.0
64.0	23.1	26.9	2 000							64.0
48.8m (160 Ft.) BOOM										
15.2	80.1	70.6	12 100 *							15.2
16.0	79.5	70.5	11 900 *							16.0
18.0	77.8	70.0	11 700 *							18.0
20.0	76.1	69.5	11 400 *	79.2	69.1	10 300*				20.0
22.0	74.4	69.0	11 100 *	77.5	68.5	10 100*				22.0
24.0	72.7	68.3	10 900 *	75.8	67.9	9 900*	79.0	66.7	8 900*	24.0
26.0	71.0	67.6	10 600 *	74.0	67.2	9 600*	77.2	66.0	8 700*	26.0
28.0	69.2	66.9	10 400 *	72.3	66.4	9 500*	75.4	65.2	8 600*	28.0
32.0	65.6	65.1	9 500	68.7	64.6	9 100*	71.7	63.4	8 200*	32.0
36.0	62.0	63.0	7 800	65.0	62.5	8 200	67.9	61.3	7 600*	36.0
40.0	58.1	60.6	6 400	61.1	60.1	6 700	64.0	58.8	7 000	40.0
44.0	54.2	57.8	5 300	57.1	57.3	5 600	59.9	55.9	5 900	44.0
48.0	49.9	54.6	4 400	52.8	54.0	4 600	55.5	52.5	4 900	48.0
52.0	45.4	50.8	3 600	48.3	50.1	3 800	50.8	48.6	4 000	52.0
56.0	40.5	46.3	2 900	43.3	45.6	3 100	45.6	43.9	3 300	56.0
60.0	35.0	40.9	2 400	37.7	40.1	2 500				60.0
64.0	28.6	34.2	1 900	31.1	33.2	1 900				64.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

21.3m (70 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
51.8m (170 Ft.) BOOM										
15.2	80.5	73.7	12 200 *							15.2
16.0	79.9	73.6	12 000 *							16.0
18.0	78.3	73.2	11 700 *							18.0
20.0	76.7	72.7	11 500 *	79.7	72.2	10 400*				20.0
22.0	75.1	72.1	11 200 *	78.1	71.7	10 100*				22.0
24.0	73.5	71.5	11 000 *	76.4	71.1	9 900*	79.4	69.9	9 000*	24.0
26.0	71.8	70.9	10 700 *	74.7	70.4	9 700*	77.8	69.2	8 800*	26.0
28.0	70.1	70.1	10 500 *	73.1	69.6	9 500*	76.0	68.5	8 700*	28.0
32.0	66.7	68.5	9 300	69.6	68.0	9 200*	72.6	66.8	8 300*	32.0
36.0	63.2	66.5	7 600	66.1	66.0	8 000	69.0	64.8	7 700*	36.0
40.0	59.6	64.2	6 200	62.5	63.7	6 600	65.3	62.4	7 000	40.0
44.0	55.9	61.6	5 100	58.7	61.0	5 400	61.4	59.7	5 800	44.0
48.0	51.9	58.6	4 200	54.7	58.0	4 500	57.3	56.5	4 700	48.0
52.0	47.8	55.0	3 400	50.5	54.4	3 600	53.0	52.9	3 900	52.0
56.0	43.3	51.0	2 700	46.0	50.3	3 000	48.3	48.6	3 100	56.0
60.0	38.4	46.1	2 200	41.0	45.4	2 300	43.1	43.6	2 500	60.0
64.0				35.4	39.5	1 800				64.0
54.9m (180 Ft.) BOOM										
15.2	80.9	76.8	12 200 *							15.2
16.0	80.3	76.7	12 100 *							16.0
18.0	78.8	76.3	11 800 *							18.0
20.0	77.3	75.8	11 600 *	80.1	75.4	10 400*				20.0
22.0	75.7	75.3	11 300 *	78.6	74.8	10 200*				22.0
24.0	74.1	74.7	11 100 *	77.0	74.2	10 000*	79.9	73.1	9 000*	24.0
26.0	72.6	74.1	10 900 *	75.4	73.6	9 800*	78.3	72.4	8 800*	26.0
28.0	71.0	73.4	10 600 *	73.8	72.9	9 600*	76.7	71.7	8 700*	28.0
32.0	67.7	71.8	9 300	70.5	71.3	9 200*	73.3	70.1	8 400*	32.0
36.0	64.4	69.9	7 500	67.2	69.4	7 900	69.9	68.2	7 900*	36.0
40.0	61.0	67.8	6 100	63.7	67.2	6 500	66.4	66.0	6 900	40.0
44.0	57.4	65.3	5 000	60.2	64.7	5 300	62.8	63.4	5 700	44.0
48.0	53.7	62.4	4 100	56.4	61.8	4 400	59.0	60.5	4 600	48.0
52.0	49.9	59.2	3 300	52.5	58.5	3 500	54.9	57.1	3 800	52.0
56.0	45.7	55.4	2 600	48.3	54.7	2 800	50.6	53.1	3 100	56.0
60.0	41.3	51.0	2 100	43.8	50.3	2 200	46.0	48.6	2 400	60.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

21.3m (70 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
57.9m (190 Ft.) BOOM										
16.8	80.1	79.7	12 100 *							16.8
18.0	79.2	79.4	11 900 *							18.0
20.0	77.8	79.0	11 700 *	80.5	78.5	10 500*				20.0
22.0	76.3	78.5	11 400 *	79.0	78.0	10 300*				22.0
24.0	74.8	77.9	11 200 *	77.5	77.4	10 100*				24.0
26.0	73.3	77.3	11 000 *	76.0	76.8	9 900*	78.8	75.6	8 900*	26.0
28.0	71.7	76.6	10 700 *	74.4	76.1	9 700*	77.2	74.9	8 800*	28.0
32.0	68.6	75.1	9 100	71.3	74.6	9 300*	74.0	73.4	8 500*	32.0
36.0	65.5	73.3	7 300	68.1	72.8	7 800	70.8	71.6	8 100*	36.0
40.0	62.2	71.3	6 000	64.9	70.7	6 300	67.5	69.4	6 800	40.0
44.0	58.9	68.9	4 800	61.5	68.4	5 200	64.0	67.0	5 500	44.0
48.0	55.4	66.2	3 900	58.0	65.6	4 200	60.4	64.3	4 500	48.0
52.0	51.7	63.2	3 100	54.3	62.5	3 400	56.6	61.1	3 600	52.0
56.0	47.9	59.6	2 500	50.4	59.0	2 700	52.7	57.5	2 900	56.0
60.0	43.8	55.6	1 900	46.2	54.9	2 100	48.4	53.3	2 300	60.0
61.0m (200 Ft.) BOOM										
16.8	80.5	82.8	12 200 *							16.8
18.0	79.6	82.5	12 000 *							18.0
20.0	78.2	82.1	11 800 *	80.9	81.6	10 500*				20.0
22.0	76.8	81.6	11 500 *	79.4	81.1	10 300*				22.0
24.0	75.3	81.1	11 300 *	78.0	80.6	10 100*				24.0
26.0	73.9	80.5	11 100 *	76.5	80.0	10 000*	79.2	78.8	8 900*	26.0
28.0	72.4	79.8	10 800	75.0	79.3	9 800*	77.7	78.1	8 800*	28.0
32.0	69.5	78.4	8 900	72.1	77.9	9 400*	74.7	76.7	8 400*	32.0
36.0	66.4	76.7	7 100	69.0	76.2	7 600	71.6	74.9	8 000	36.0
40.0	63.3	74.7	5 800	65.9	74.2	6 200	68.4	72.9	6 600	40.0
44.0	60.1	72.5	4 700	62.7	71.9	5 000	65.1	70.6	5 400	44.0
48.0	56.8	69.9	3 700	59.3	69.4	4 100	61.7	68.0	4 400	48.0
52.0	53.4	67.0	3 000	55.9	66.4	3 200	58.2	65.0	3 500	52.0
56.0	49.8	63.8	2 300	52.2	63.1	2 500	54.5	61.6	2 800	56.0
60.0				48.4	59.3	2 000	50.5	57.7	2 100	60.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

24.4m (80 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
27.4m (90 Ft.) BOOM										
12.2	79.6	52.6	9 200 *							12.2
14.0	77.5	52.2	9 200 *							14.0
16.0	75.3	51.7	9 100 *	80.1	51.3	8 800*				16.0
18.0	72.9	51.1	9 000 *	77.8	50.7	8 500*				18.0
20.0	70.6	50.4	8 900 *	75.4	50.0	8 200*	80.6	49.1	7 500*	20.0
22.0	68.2	49.6	8 600 *	73.0	49.2	7 900*	78.1	48.3	7 300*	22.0
24.0	65.8	48.7	8 300 *	70.6	48.3	7 700*	75.6	47.3	7 100*	24.0
26.0	63.3	47.7	8 000 *	68.1	47.3	7 400*	73.1	46.3	6 900*	26.0
28.0	60.8	46.6	7 700 *	65.6	46.2	7 200*	70.5	45.2	6 700*	28.0
32.0	55.5	44.0	7 200 *	60.2	43.6	6 800*	65.0	42.5	6 200*	32.0
36.0	49.9	40.8	6 800 *	54.5	40.3	6 400*	59.1	39.2	5 500*	36.0
40.0	43.7	36.9	6 400 *	48.3	36.4	6 000*	52.6	35.1	5 100*	40.0
44.0	36.6	31.9	6 000 *	41.1	31.4	5 800*	45.2	29.8	4 700*	44.0
48.0	28.1	25.3	5 500	32.4	24.6	5 400*				48.0
30.5m (100 Ft.) BOOM										
12.2	80.2	55.7	9 300 *							12.2
14.0	78.2	55.3	9 200 *							14.0
16.0	76.1	54.9	9 100 *							16.0
18.0	73.9	54.3	9 000 *	78.5	53.9	8 600*				18.0
20.0	71.7	53.6	8 900 *	76.3	53.2	8 300*				20.0
22.0	69.5	52.9	8 800 *	74.1	52.5	8 000*	78.8	51.5	7 400*	22.0
24.0	67.2	52.0	8 400 *	71.8	51.6	7 800*	76.5	50.6	7 200*	24.0
26.0	64.9	51.1	8 200 *	69.5	50.7	7 600*	74.1	49.7	7 000*	26.0
28.0	62.6	50.1	7 900 *	67.1	49.7	7 300*	71.7	48.6	6 800*	28.0
32.0	57.7	47.7	7 400 *	62.2	47.2	6 900*	66.7	46.1	6 300*	32.0
36.0	52.5	44.8	7 000 *	57.0	44.3	6 500*	61.3	43.1	5 800*	36.0
40.0	47.0	41.2	6 600 *	51.3	40.8	6 200*	55.5	39.5	5 300*	40.0
44.0	40.8	36.9	6 200 *	45.1	36.4	5 900*	49.0	34.9	4 900*	44.0
48.0	33.8	31.5	5 400	37.9	30.8	5 500				48.0
52.0	24.9	24.0	4 500							52.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

24.4m (80 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
33.5m (110 Ft.) BOOM										
12.2	80.7	58.8	9 300 *							12.2
14.0	78.9	58.5	9 200 *							14.0
16.0	76.8	58.0	9 100 *							16.0
18.0	74.8	57.5	9 000 *	79.1	57.1	8 600*				18.0
20.0	72.7	56.8	9 000 *	77.1	56.5	8 400*				20.0
22.0	70.6	56.1	8 900 *	74.9	55.7	8 100*	79.5	54.7	7 400*	22.0
24.0	68.5	55.3	8 600 *	72.8	55.0	7 900*	77.3	53.9	7 200*	24.0
26.0	66.3	54.5	8 300 *	70.6	54.1	7 700*	75.1	53.0	7 000*	26.0
28.0	64.1	53.5	8 100 *	68.4	53.1	7 500*	72.8	52.0	6 800*	28.0
32.0	59.6	51.3	7 600 *	63.8	50.8	7 100*	68.1	49.7	6 500*	32.0
36.0	54.8	48.6	7 200 *	59.0	48.1	6 700*	63.2	46.9	5 900*	36.0
40.0	49.8	45.4	6 800 *	53.9	44.9	6 400*	57.9	43.6	5 400*	40.0
44.0	44.3	41.5	6 100 *	48.3	41.0	6 000*	52.2	39.6	5 000*	44.0
48.0	38.1	36.8	5 200 *	42.1	36.2	5 300 *	45.7	34.5	4 700*	48.0
52.0	31.0	30.7	4 400 *	34.8	30.0	4 500 *				52.0
56.0	21.7	22.3	3 700 *							56.0
36.6m (120 Ft.) BOOM										
13.7	79.7	61.6	9 200 *							13.7
14.0	79.4	61.6	9 200 *							14.0
16.0	77.5	61.1	9 200 *							16.0
18.0	75.6	60.6	9 100 *	79.7	60.2	8 700*				18.0
20.0	73.6	60.0	9 000 *	77.7	59.6	8 500*				20.0
22.0	71.6	59.4	8 900 *	75.7	59.0	8 200*	80.1	57.9	7 500*	22.0
24.0	69.6	58.6	8 800 *	73.7	58.2	8 000*	78.0	57.2	7 300*	24.0
26.0	67.6	57.8	8 500 *	71.7	57.4	7 800*	75.9	56.3	7 100*	26.0
28.0	65.5	56.9	8 200 *	69.6	56.5	7 600*	73.8	55.4	6 900*	28.0
32.0	61.3	54.8	7 800 *	65.3	54.4	7 200*	69.4	53.2	6 600*	32.0
36.0	56.9	52.3	7 300 *	60.9	51.9	6 800*	64.8	50.7	6 100*	36.0
40.0	52.2	49.4	6 900 *	56.1	48.9	6 500*	60.0	47.6	5 600*	40.0
44.0	47.2	45.9	5 900 *	51.1	45.3	6 100 *	54.8	43.9	5 200*	44.0
48.0	41.7	41.6	5 000 *	45.5	41.1	5 200 *	49.0	39.5	4 900*	48.0
52.0	35.6	36.5	4 200 *	39.3	35.8	4 400 *	42.5	34.0	4 600 *	52.0
56.0	28.2	29.8	3 600 *	31.8	28.9	3 700 *				56.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

24.4m (80 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
39.6m (130 Ft.) BOOM										
13.7	80.2	64.7	9 300 *							13.7
14.0	80.0	64.7	9 300 *							14.0
16.0	78.1	64.3	9 200 *							16.0
18.0	76.3	63.8	9 100 *							18.0
20.0	74.4	63.2	9 100 *	78.3	62.8	8 500*				20.0
22.0	72.5	62.6	9 000 *	76.5	62.2	8 300*				22.0
24.0	70.6	61.9	8 900 *	74.5	61.5	8 100*	78.6	60.4	7 300*	24.0
26.0	68.7	61.1	8 600 *	72.6	60.7	7 900*	76.6	59.6	7 200*	26.0
28.0	66.8	60.3	8 400 *	70.7	59.8	7 700*	74.6	58.7	7 000*	28.0
32.0	62.8	58.3	7 900 *	66.6	57.9	7 300*	70.5	56.7	6 700*	32.0
36.0	58.6	56.0	7 500 *	62.5	55.5	6 900*	66.3	54.3	6 300*	36.0
40.0	54.3	53.2	6 900	58.1	52.7	6 600*	61.8	51.4	5 800*	40.0
44.0	49.7	50.0	5 800	53.4	49.5	6 100	57.0	48.1	5 400*	44.0
48.0	44.7	46.2	4 800	48.4	45.6	5 100	51.8	44.1	5 000*	48.0
52.0	39.3	41.6	4 100	42.9	40.9	4 300	46.1	39.3	4 400	52.0
56.0	33.1	35.9	3 400	36.6	35.2	3 600				56.0
60.0	25.6	28.5	2 800							60.0
42.7m (140 Ft.) BOOM										
13.7	80.7	67.8	9 300 *							13.7
14.0	80.4	67.8	9 300 *							14.0
16.0	78.7	67.4	9 200 *							16.0
18.0	76.9	66.9	9 200 *							18.0
20.0	75.1	66.4	9 100 *	78.9	66.0	8 600*				20.0
22.0	73.4	65.8	9 000 *	77.1	65.4	8 400*				22.0
24.0	71.6	65.1	8 900 *	75.3	64.7	8 200*	79.2	63.6	7 400*	24.0
26.0	69.7	64.4	8 800 *	73.5	64.0	8 000*	77.3	62.8	7 200*	26.0
28.0	67.9	63.6	8 500 *	71.6	63.1	7 800*	75.4	62.0	7 100*	28.0
32.0	64.1	61.7	8 100 *	67.8	61.3	7 400*	71.5	60.1	6 800*	32.0
36.0	60.2	59.5	7 700 *	63.9	59.1	7 100*	67.5	57.8	6 400*	36.0
40.0	56.2	57.0	6 700	59.8	56.5	6 700*	63.3	55.2	5 900*	40.0
44.0	51.9	54.0	5 600	55.5	53.5	5 900	58.9	52.1	5 500*	44.0
48.0	47.4	50.5	4 700	50.9	49.9	5 000	54.2	48.4	5 200	48.0
52.0	42.4	46.3	4 000	45.9	45.7	4 100	49.0	44.1	4 400	52.0
56.0	37.0	41.3	3 300	40.4	40.7	3 500	43.3	38.8	3 600	56.0
60.0	30.7	35.2	2 700	33.9	34.4	2 800				60.0
64.0	22.9	26.9	2 200							64.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

24.4m (80 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
45.7m (150 Ft.) BOOM										
15.2	79.8	70.7	9 300 *							15.2
16.0	79.2	70.5	9 200 *							16.0
18.0	77.5	70.1	9 200 *							18.0
20.0	75.8	69.6	9 100 *	79.4	69.1	8 700*				20.0
22.0	74.1	69.0	9 000 *	77.7	68.6	8 500*				22.0
24.0	72.4	68.4	9 000 *	76.0	67.9	8 300*	79.7	66.8	7 400*	24.0
26.0	70.7	67.7	8 900 *	74.2	67.2	8 100*	77.9	66.1	7 300*	26.0
28.0	68.9	66.9	8 600 *	72.5	66.4	7 900*	76.1	65.3	7 100*	28.0
32.0	65.3	65.1	8 300 *	68.9	64.7	7 500*	72.4	63.5	6 800*	32.0
36.0	61.7	63.1	7 800	65.2	62.6	7 200*	68.7	61.3	6 600*	36.0
40.0	57.8	60.6	6 500	61.3	60.2	6 800	64.7	58.9	6 100*	40.0
44.0	53.9	57.8	5 400	57.3	57.3	5 800	60.6	56.0	5 700*	44.0
48.0	49.6	54.6	4 600	53.0	54.0	4 800	56.2	52.6	5 100	48.0
52.0	45.1	50.8	3 800	48.5	50.2	4 000	51.5	48.6	4 200	52.0
56.0	40.2	46.3	3 100	43.5	45.7	3 300	46.4	43.9	3 500	56.0
60.0	34.7	40.9	2 500	37.9	40.2	2 700				60.0
64.0	28.3	34.2	2 000	31.4	33.3	2 100				64.0
48.8m (160 Ft.) BOOM										
15.2	80.2	73.8	9 300 *							15.2
16.0	79.6	73.6	9 300 *							16.0
18.0	78.0	73.2	9 200 *							18.0
20.0	76.4	72.7	9 100 *	79.9	72.3	8 700*				20.0
22.0	74.8	72.2	9 000 *	78.2	71.7	8 500*				22.0
24.0	73.2	71.6	9 000 *	76.6	71.1	8 300*				24.0
26.0	71.5	70.9	8 900 *	74.9	70.4	8 200*	78.4	69.3	7 300*	26.0
28.0	69.8	70.2	8 800 *	73.2	69.7	7 900*	76.7	68.5	7 200*	28.0
32.0	66.4	68.5	8 300 *	69.8	68.0	7 600*	73.3	66.8	6 900*	32.0
36.0	63.0	66.5	7 800	66.3	66.0	7 300*	69.7	64.8	6 600*	36.0
40.0	59.3	64.2	6 400	62.7	63.8	6 800	66.0	62.5	6 300*	40.0
44.0	55.6	61.6	5 300	58.9	61.1	5 600	62.1	59.7	5 800*	44.0
48.0	51.7	58.6	4 400	54.9	58.0	4 700	58.0	56.6	5 000	48.0
52.0	47.5	55.1	3 600	50.7	54.5	3 900	53.7	53.0	4 100	52.0
56.0	43.0	51.0	3 000	46.2	50.4	3 100	49.0	48.7	3 400	56.0
60.0	38.1	46.2	2 400	41.2	45.5	2 500	43.9	43.6	2 700	60.0
64.0	32.6	40.4	1 900	35.6	39.6	2 000				64.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

24.4m (80 Ft.) JIB


Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
51.8m (170 Ft.) BOOM										
15.2	80.6	76.9	9 300 *							15.2
16.0	80.0	76.7	9 300 *							16.0
18.0	78.5	76.3	9 200 *							18.0
20.0	77.0	75.8	9 200 *	80.3	75.4	8 800*				20.0
22.0	75.4	75.3	9 100 *	78.7	74.9	8 600*				22.0
24.0	73.9	74.7	9 000 *	77.1	74.3	8 400*				24.0
26.0	72.3	74.1	9 000 *	75.5	73.7	8 200*	78.9	72.5	7 400*	26.0
28.0	70.7	73.4	8 900 *	73.9	73.0	8 000*	77.3	71.8	7 200*	28.0
32.0	67.4	71.8	8 500 *	70.7	71.4	7 700*	74.0	70.1	6 900*	32.0
36.0	64.1	70.0	7 600	67.3	69.5	7 300*	70.6	68.2	6 700*	36.0
40.0	60.7	67.8	6 200	63.9	67.3	6 600	67.1	66.0	6 400*	40.0
44.0	57.2	65.3	5 100	60.3	64.8	5 500	63.4	63.4	5 900	44.0
48.0	53.5	62.5	4 200	56.6	61.9	4 500	59.6	60.5	4 900	48.0
52.0	49.6	59.2	3 400	52.7	58.6	3 700	55.6	57.1	4 000	52.0
56.0	45.5	55.4	2 800	48.5	54.8	3 000	51.3	53.2	3 200	56.0
60.0	41.0	51.0	2 200	44.0	50.4	2 400	46.6	48.6	2 600	60.0
64.0				39.0	45.1	1 900	41.4	43.1	2 000	64.0
54.9m (180 Ft.) BOOM										
15.2	81.0	80.0	9 300 *							15.2
16.0	80.4	79.8	9 300 *							16.0
18.0	79.0	79.4	9 300 *							18.0
20.0	77.5	79.0	9 200 *	80.7	78.5	8 800*				20.0
22.0	76.0	78.5	9 100 *	79.2	78.0	8 600*				22.0
24.0	74.5	77.9	9 000 *	77.6	77.5	8 500*				24.0
26.0	73.0	77.3	9 000 *	76.1	76.9	8 300*	79.4	75.7	7 400*	26.0
28.0	71.5	76.6	8 900 *	74.6	76.2	8 100*	77.8	75.0	7 300*	28.0
32.0	68.4	75.1	8 600 *	71.5	74.7	7 800*	74.7	73.4	7 000*	32.0
36.0	65.2	73.3	7 500	68.3	72.9	7 400*	71.4	71.6	6 700*	36.0
40.0	61.9	71.3	6 100	65.0	70.8	6 500	68.1	69.5	6 500*	40.0
44.0	58.6	68.9	5 000	61.6	68.4	5 400	64.6	67.1	5 800	44.0
48.0	55.1	66.2	4 100	58.1	65.7	4 400	61.1	64.3	4 800	48.0
52.0	51.5	63.2	3 300	54.4	62.6	3 600	57.3	61.1	3 900	52.0
56.0	47.6	59.7	2 600	50.6	59.1	2 900	53.3	57.5	3 100	56.0
60.0	43.5	55.6	2 100	46.4	55.0	2 300	49.0	53.3	2 500	60.0
64.0				41.9	50.3	1 800	44.4	48.4	1 900	64.0



Liftcrane Jib Capacities

Jib No. 134 With 3 810 mm Strut On
Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

24.4m (80 Ft.) JIB

Jib Oper. Rad. Meters	5 Degree Offset			15 Degree Offset			25 Degree Offset			Jib Oper. Rad. Meters
	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	Boom Ang. Deg.	Jib Point Elev. Meters	Jib Capacity Kilograms	
57.9m (190 Ft.) BOOM										
16.8	80.3	82.8	9 300 *							16.8
18.0	79.4	82.5	9 300 *							18.0
20.0	78.0	82.1	9 200 *							20.0
22.0	76.5	81.6	9 100 *	79.6	81.2	8 700*				22.0
24.0	75.1	81.1	9 100 *	78.1	80.6	8 500*				24.0
26.0	73.6	80.5	9 000 *	76.7	80.1	8 300*	79.8	78.8	7 400*	26.0
28.0	72.2	79.9	9 000 *	75.2	79.4	8 200*	78.3	78.2	7 300*	28.0
32.0	69.2	78.4	8 700 *	72.2	77.9	7 800*	75.3	76.7	7 000*	32.0
36.0	66.2	76.7	7 300	69.2	76.2	7 500*	72.2	74.9	6 800*	36.0
40.0	63.1	74.7	5 900	66.0	74.3	6 400	69.0	72.9	6 600	40.0
44.0	59.9	72.5	4 800	62.8	72.0	5 200	65.7	70.6	5 600	44.0
48.0	56.6	70.0	3 900	59.5	69.4	4 200	62.3	68.0	4 600	48.0
52.0	53.1	67.1	3 100	56.0	66.5	3 400	58.8	65.0	3 800	52.0
56.0	49.5	63.8	2 500	52.4	63.2	2 700	55.1	61.6	3 000	56.0
60.0	45.7	60.0	1 900	48.5	59.4	2 100	51.1	57.8	2 400	60.0
64.0							46.8	53.3	1 800	64.0
61.0m (200 Ft.) BOOM										
16.8	80.6	85.9	9 300 *							16.8
18.0	79.8	85.6	9 300 *							18.0
20.0	78.4	85.2	9 200 *							20.0
22.0	77.0	84.8	9 100 *	80.0	84.3	8 700*				22.0
24.0	75.6	84.3	9 100 *	78.6	83.8	8 600*				24.0
26.0	74.2	83.7	9 000 *	77.2	83.2	8 400*	80.2	82.0	7 500*	26.0
28.0	72.8	83.1	9 000 *	75.7	82.6	8 200*	78.8	81.4	7 400*	28.0
32.0	70.0	81.7	8 800 *	72.9	81.2	7 900*	75.9	79.9	7 100*	32.0
36.0	67.1	80.0	7 200	70.0	79.6	7 600	72.9	78.3	6 800*	36.0
40.0	64.1	78.2	5 800	67.0	77.7	6 200	69.9	76.4	6 600	40.0
44.0	61.1	76.0	4 700	63.9	75.5	5 100	66.7	74.2	5 500	44.0
48.0	57.9	73.6	3 700	60.8	73.1	4 100	63.5	71.7	4 500	48.0
52.0	54.7	70.9	3 000	57.5	70.3	3 300	60.2	68.9	3 600	52.0
56.0	51.3	67.8	2 300	54.1	67.2	2 600	56.7	65.7	2 900	56.0
60.0				50.4	63.7	2 000	53.0	62.0	2 200	60.0