

Liftcrane Boom Capacities

Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

European Standards
14 m/s Maximum Wind thru 45.7m Boom
10 m/s with 48.8m thru 64.0m Boom
7 m/s with 67.1m thru 76.2m Boom
Conditions include jib when attached

555 SERIES 2

LIFTING CAPACITIES: Lifting capacities for various boom lengths and operating radii are for freely suspended loads and are calculated to comply with prEN 13000, ISO 4305 and include factors based on a 4.0 degree tipping angle. Capacities based on structural competence are denoted by an asterisk (*). Capacities indicated by (b) require 4 540 kg minimum weight. *To maintain boom and mast stability at high boom angles, a minimum of 4 parts hoist line is required when using rear drum on 15.2m thru 21.3m boom lengths.*

Upper boom point capacity for liftcrane service with single part whip line is 13 610 kg or 27 220 kg with two part whip line. When boom butt mounted auxiliary drum equipped for 26 mm wire rope is used, capacity with single part whip line is 9 070 kg or 18 140 kg with two part whip line. In all cases, upper boom point capacities cannot exceed those listed for main boom capacity.

Weight of upper boom point, jib, all load blocks, hooks, weight ball, slings, etc., beneath boom and jib point sheaves, is considered part of main boom load. Reeved hoist line included in boom weight. Boom is not to be lowered beyond radii where combined weights are greater than rated capacity. Where no capacity is shown, operation is not intended or approved.

OPERATING CONDITIONS: Machine to operate in a level position on a firm uniformly supporting surface. Refer to boom rigging **No. A00952** and Wire Rope Specification chart **No. 8444-A**. Crane operator judgment must be used to allow for dynamic load effects of swinging, hoisting or lowering, travel, wind conditions, as well as adverse operating conditions and physical machine depreciation. Refer to operators manual for operating guidelines.

WIND CONDITIONS: Machine may be operated in winds stated in maximum wind speed table provided crane operator judgment is used to allow for wind effect on lifted load and other considerations noted on capacity chart are followed. Wind will have a considerable effect on load. Loads must be compensated for accordingly by reducing load ratings, reducing operating speeds, or by a combination of both. Recommend stopping operation and lowering boom and jib to 68 degree boom angle when wind exceeds conditions stated in column A. Lower boom and jib to ground when wind is above 22 m/s (column B).

MACHINE TRAVEL: Machine to travel on a firm, level [up to 1 percent (0.5 degrees) grade] and uniformly supporting

surface. *Travel with 100 percent of rated load prohibited.* Travel restricted to 90 percent of rated capacity with speed not to exceed 1.4 km/hr. Boom must be within boom angle range shown in capacity chart. Refer to Maximum Allowable Travel Specification chart **No. 8446-A**.


OPERATING RADIUS: Operating radius is horizontal distance from axis of rotation to center of vertical hoist line or load block. Boom angle is angle between horizontal and centerline of boom butt and inserts, and is an indication of operating radius. In all cases, operating radius shall govern capacity.

BOOM POINT ELEVATION: Boom point elevation is vertical distance from ground level to centerline of boom point shaft.

MACHINE EQUIPMENT: Machine equipped with 7 264 mm crawlers, 1 219 mm treads, 7 010 mm live mast, 16 part boom hoist reeving, boom support straps, rotating bed No. A01066¹ or No. A03188 (refer to I.D. plate at front of rotating bed), 44 680 kg crane counterweight and two 9 980 kg carbody counterweights.


¹WARNING: 570 kg front counterweight is required for cranes with rotating bed No. A01066 that do not have free-fall option. Counterweight can be removed only if crane has free-fall option on both front and rear drums.

Maximum Wind Speeds		
Boom Lengths	A Working Wind	B Lower To Ground
15.2m - 45.7m	14 m/s	22 m/s
48.8m - 64.0m	10 m/s	22 m/s
67.1m - 76.2m	7 m/s	22 m/s
Jib included when attached.		



44 680 kg Crane Counterweight
6 Side Boxes

Consult jib chart for jib capacities. Upper boom point and upper wire rope guide (No. A04352) for third line must be removed when jib is attached.

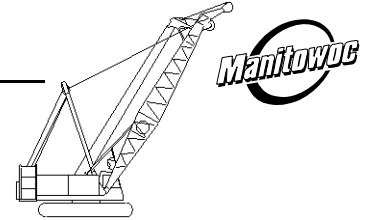

Liftcrane Boom Capacities

Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

European Standards
14 m/s Maximum Wind thru 45.7m Boom
10 m/s with 48.8m thru 64.0m Boom
7 m/s with 67.1m thru 76.2m Boom
Conditions include jib when attached

555 SERIES 2

Maximum Boom and Jib Lengths Lifted Unassisted			
Over End of Blocked Crawlers		Over Side of Crawlers	
Boom Length	Jib No. 134	Boom Length	Jib No. 134
(a,b) 76.2m	—	(b) 67.1m	—
(b) 73.2m	—	64.0m	—
70.1m	—	61.0m	9.1m
67.1m	12.2m	57.9m	15.2m
64.0m	18.3m	54.9m	24.4m
61.0m	24.4m		
Load block, hook and weight ball on ground at start. (a) Upper boom point cannot be attached on 76.2m boom. (b) Upper wire rope guide (No. A04352) for third line cannot be attached on 73.2m and 76.2m booms and cannot be lifted over side of crawlers on 67.1m boom.			

Upper Boom Point Deduct

Deduct 500 kg from capacities when upper boom point is attached.

Wire Rope Guide Deduct (For Third Line)

Deduct 270 kg from boom capacities when upper wire rope guide (No. A04352) for third line is attached.

Deduct From Capacities When Jib Is Attached


Jib Length	Jib No. 134
9.1m	1 770 kg
12.2m	2 130 kg
15.2m	2 540 kg
18.3m	2 990 kg
21.3m	3 450 kg
24.4m	3 950 kg

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
15.2m (50 Ft.) Boom			
4.6	80.6	16.8	135 500 *b
5.0	78.9	16.7	124 500 *b
5.5	77.0	16.6	113 700 *b
6.0	75.0	16.4	104 500 *b
7.0	71.1	16.1	89 300 b
8.0	67.0	15.7	74 900
9.0	62.7	15.1	62 500
10.0	58.3	14.5	53 500
11.0	53.7	13.8	46 600
12.0	48.7	12.9	41 100
13.0	43.3	11.9	36 700
14.0	37.2	10.6	33 000
15.0	30.0	9.0	29 900

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
18.3m (60 Ft.) Boom			
4.6	82.2	19.9	135 400 *b
5.0	80.8	19.8	124 400 *b
5.5	79.2	19.7	113 600 *b
6.0	77.6	19.6	104 100 b
7.0	74.3	19.3	85 900 b
8.0	71.0	19.0	72 800
9.0	67.6	18.5	62 600
10.0	64.2	18.1	53 600
11.0	60.6	17.5	46 700
12.0	56.8	16.8	41 200
13.0	52.9	16.1	36 800
14.0	48.8	15.2	33 200
15.0	44.3	14.2	30 100
16.0	39.5	13.0	27 500
18.0	27.5	9.8	23 200

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
21.3m (70 Ft.) Boom			
4.9	82.5	22.9	125 800 *b
5.0	82.1	22.9	123 200 b
5.5	80.8	22.8	111 000 b
6.0	79.4	22.7	99 700 b
7.0	76.6	22.5	82 600 b
8.0	73.8	22.2	70 400
9.0	71.0	21.8	61 100
10.0	68.1	21.4	53 600
11.0	65.1	21.0	46 700
12.0	62.1	20.4	41 200
13.0	59.0	19.8	36 800
14.0	55.7	19.2	33 100
15.0	52.3	18.4	30 000
16.0	48.8	17.5	27 400
18.0	41.0	15.4	23 200
20.0	31.5	12.5	20 000

Capacities based on structural competence are denoted by an asterisk (*).
Capacities indicated by (b) require 4 540 kg minimum weight.

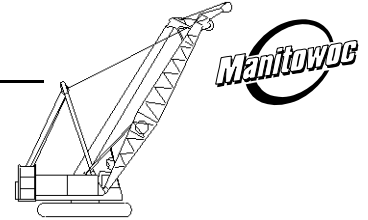

Liftcrane Boom Capacities

Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

European Standards
14 m/s Maximum Wind thru 45.7m Boom
10 m/s with 48.8m thru 64.0m Boom
7 m/s with 67.1m thru 76.2m Boom
Conditions include jib when attached


555 SERIES 2

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
24.4m (80 Ft.) Boom			
5.2	82.7	26.0	113 700 b
5.5	81.9	25.9	105 900 b
6.0	80.7	25.8	95 500 b
7.0	78.3	25.6	79 700 b
8.0	75.9	25.4	68 100
9.0	73.5	25.1	59 400
10.0	71.0	24.7	52 400
11.0	68.5	24.3	46 800
12.0	65.9	23.9	41 300
13.0	63.2	23.4	36 800
14.0	60.5	22.8	33 200
15.0	57.8	22.2	30 100
16.0	54.9	21.5	27 500
18.0	48.8	19.8	23 200
20.0	42.1	17.8	20 000
22.0	34.2	15.1	17 400
24.0	24.2	11.3	15 300
27.4m (90 Ft.) Boom			
5.5	82.9	29.0	101 300 b
6.0	81.8	28.9	91 400 b
7.0	79.7	28.7	76 700 b
8.0	77.5	28.5	65 800
9.0	75.4	28.2	57 500
10.0	73.2	27.9	50 900
11.0	71.0	27.6	45 500
12.0	68.7	27.2	41 000
13.0	66.4	26.8	36 800
14.0	64.1	26.3	33 000
15.0	61.8	25.7	29 900
16.0	59.3	25.2	27 200
18.0	54.3	23.8	23 000
20.0	48.8	22.1	19 800
22.0	42.9	20.1	17 200
24.0	36.2	17.6	15 100
26.0	28.0	14.2	13 400

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
30.5m (100 Ft.) Boom			
5.8	83.0	32.0	91 400 b
6.0	82.6	32.0	88 000 b
7.0	80.7	31.8	74 100 b
8.0	78.8	31.6	63 900
9.0	76.9	31.4	56 000
10.0	74.9	31.1	49 600
11.0	72.9	30.8	44 500
12.0	71.0	30.5	40 300
13.0	68.9	30.1	36 500
14.0	66.9	29.7	33 100
15.0	64.8	29.2	30 000
16.0	62.7	28.7	27 300
18.0	58.3	27.5	23 100
20.0	53.7	26.1	19 800
22.0	48.9	24.4	17 200
24.0	43.6	22.4	15 100
26.0	37.6	20.0	13 400
28.0	30.8	17.0	11 900
30.0	22.0	12.7	10 700
33.5m (110 Ft.) Boom			
6.7	82.1	35.0	74 900
7.0	81.6	34.9	71 700
8.0	79.8	34.7	61 800
9.0	78.1	34.5	54 300
10.0	76.3	34.3	48 200
11.0	74.5	34.0	43 300
12.0	72.8	33.7	39 200
13.0	70.9	33.4	35 700
14.0	69.1	33.0	32 700
15.0	67.3	32.6	29 800
16.0	65.4	32.1	27 200
18.0	61.5	31.1	22 900
20.0	57.5	29.8	19 600
22.0	53.3	28.4	17 000
24.0	48.9	26.7	14 900
26.0	44.1	24.8	13 200
28.0	38.8	22.4	11 700
30.0	32.8	19.6	10 500
32.0	25.6	15.8	9 500

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
36.6m (120 Ft.) Boom			
6.7	82.7	38.1	72 400
7.0	82.3	38.0	69 300
8.0	80.7	37.8	60 000
9.0	79.1	37.7	52 800
10.0	77.5	37.4	47 000
11.0	75.9	37.2	42 300
12.0	74.2	36.9	38 300
13.0	72.6	36.6	34 900
14.0	70.9	36.2	32 000
15.0	69.3	35.9	29 500
16.0	67.6	35.4	27 100
18.0	64.1	34.5	22 800
20.0	60.5	33.4	19 600
22.0	56.8	32.2	17 000
24.0	53.0	30.7	14 900
26.0	48.9	29.0	13 100
28.0	44.5	27.1	11 600
30.0	39.8	24.8	10 400
32.0	34.5	22.1	9 300
34.0	28.3	18.7	8 400
36.0	20.4	14.1	7 600
39.6m (130 Ft.) Boom			
7.3	82.4	41.0	63 900
8.0	81.4	40.9	58 100
9.0	79.9	40.8	51 300
10.0	78.5	40.6	45 700
11.0	77.0	40.3	41 200
12.0	75.5	40.1	37 300
13.0	74.0	39.8	34 000
14.0	72.5	39.5	31 300
15.0	70.9	39.1	28 800
16.0	69.4	38.7	26 600
18.0	66.2	37.9	22 700
20.0	63.0	36.9	19 400
22.0	59.7	35.8	16 700
24.0	56.3	34.5	14 600
26.0	52.7	33.0	12 900
28.0	48.9	31.3	11 400
30.0	44.9	29.4	10 200
32.0	40.5	27.2	9 100
34.0	35.8	24.6	8 100
36.0	30.4	21.4	7 400
38.0	23.8	17.3	6 700

Capacities based on structural competence are denoted by an asterisk (*).
Capacities indicated by (b) require 4 540 kg minimum weight.

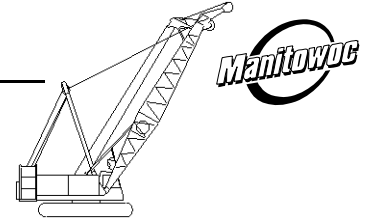

Liftcrane Boom Capacities

Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

European Standards
14 m/s Maximum Wind thru 45.7m Boom
10 m/s with 48.8m thru 64.0m Boom
7 m/s with 67.1m thru 76.2m Boom
Conditions include jib when attached


555 SERIES 2

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
42.7m (140 Ft.) Boom			
7.3	83.0	44.1	61 900
8.0	82.0	44.0	56 500
9.0	80.7	43.9	50 000
10.0	79.3	43.7	44 600
11.0	77.9	43.5	40 300
12.0	76.5	43.2	36 500
13.0	75.2	42.9	33 400
14.0	73.8	42.7	30 600
15.0	72.3	42.3	28 300
16.0	70.9	42.0	26 200
18.0	68.0	41.2	22 600
20.0	65.1	40.3	19 400
22.0	62.1	39.3	16 700
24.0	59.0	38.1	14 600
26.0	55.8	36.8	12 800
28.0	52.4	35.3	11 400
30.0	48.9	33.6	10 100
32.0	45.2	31.7	9 100
34.0	41.2	29.5	8 100
36.0	36.9	27.0	7 300
38.0	32.0	24.0	6 600
40.0	26.4	20.3	6 000
42.0	19.2	15.4	5 400
45.7m (150 Ft.) Boom			
7.9	82.7	47.1	55 300
8.0	82.6	47.1	54 800
9.0	81.3	47.0	48 500
10.0	80.0	46.8	43 400
11.0	78.7	46.6	39 200
12.0	77.5	46.4	35 600
13.0	76.2	46.1	32 500
14.0	74.9	45.8	29 900
15.0	73.6	45.5	27 600
16.0	72.2	45.2	25 500
18.0	69.6	44.5	22 100
20.0	66.9	43.7	19 100
22.0	64.1	42.7	16 500
24.0	61.3	41.7	14 400
26.0	58.3	40.5	12 700

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
45.7m (150 Ft.) Boom			
28.0	55.3	39.1	11 200
30.0	52.2	37.6	9 900
32.0	48.9	35.9	8 800
34.0	45.4	34.0	7 900
36.0	41.8	31.9	7 100
38.0	37.8	29.4	6 300
40.0	33.4	26.5	5 700
42.0	28.4	23.1	5 100
44.0	22.4	18.8	4 600
48.8m (160 Ft.) Boom			
8.5	82.4	50.1	50 000
9.0	81.8	50.0	47 400
10.0	80.6	49.9	42 400
11.0	79.5	49.7	38 400
12.0	78.3	49.5	34 900
13.0	77.0	49.2	31 900
14.0	75.8	49.0	29 300
15.0	74.6	48.7	27 100
16.0	73.4	48.4	25 100
18.0	70.9	47.8	21 700
20.0	68.4	47.0	19 000
22.0	65.8	46.1	16 500
24.0	63.2	45.1	14 400
26.0	60.5	44.0	12 600
28.0	57.8	42.8	11 100
30.0	54.9	41.4	9 900
32.0	52.0	39.9	8 800
34.0	48.9	38.2	7 800
36.0	45.7	36.3	7 000
38.0	42.2	34.2	6 200
40.0	38.6	31.8	5 600
42.0	34.6	29.1	5 000
44.0	30.1	25.8	4 500
46.0	24.9	21.9	4 000
48.0	18.3	16.6	3 700

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
51.8m (170 Ft.) Boom			
8.5	82.8	53.2	48 500
9.0	82.3	53.1	46 000
10.0	81.2	53.0	41 300
11.0	80.1	52.8	37 300
12.0	79.0	52.6	34 000
13.0	77.8	52.4	31 100
14.0	76.7	52.1	28 600
15.0	75.5	51.9	26 400
16.0	74.4	51.6	24 400
18.0	72.1	51.0	21 100
20.0	69.7	50.3	18 500
22.0	67.3	49.4	16 200
24.0	64.9	48.5	14 200
26.0	62.4	47.5	12 400
28.0	59.9	46.4	10 900
30.0	57.3	45.1	9 600
32.0	54.6	43.8	8 500
34.0	51.8	42.2	7 600
36.0	48.9	40.5	6 700
38.0	45.9	38.7	6 000
40.0	42.7	36.6	5 400
42.0	39.3	34.2	4 800
44.0	35.6	31.5	4 300
46.0	31.5	28.4	3 800
48.0	26.9	24.8	3 400
50.0	21.3	20.2	3 000

Capacities based on structural competence are denoted by an asterisk (*).
Capacities indicated by (b) require 4 540 kg minimum weight.

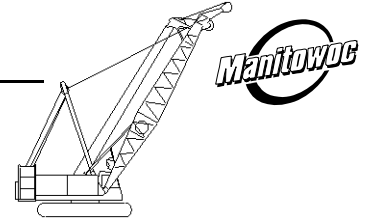

Liftcrane Boom Capacities

Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

European Standards
14 m/s Maximum Wind thru 45.7m Boom
10 m/s with 48.8m thru 64.0m Boom
7 m/s with 67.1m thru 76.2m Boom
Conditions include jib when attached


555 SERIES 2

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
54.9m (180 Ft.) Boom			
9.1	82.6	56.2	44 000
10.0	81.7	56.1	40 200
11.0	80.6	55.9	36 400
12.0	79.6	55.7	33 200
13.0	78.5	55.5	30 400
14.0	77.4	55.3	27 900
15.0	76.4	55.0	25 800
16.0	75.3	54.8	23 900
18.0	73.1	54.2	20 700
20.0	70.9	53.5	18 000
22.0	68.7	52.7	15 900
24.0	66.4	51.9	14 000
26.0	64.1	51.0	12 300
28.0	61.7	49.9	10 700
30.0	59.3	48.7	9 500
32.0	56.8	47.5	8 400
34.0	54.3	46.1	7 400
36.0	51.7	44.5	6 600
38.0	48.9	42.8	5 800
40.0	46.1	41.0	5 200
42.0	43.0	38.9	4 600
44.0	39.9	36.6	4 100
46.0	36.4	34.0	3 600
48.0	32.7	31.0	3 200
50.0	28.5	27.5	2 800
52.0	23.7	23.4	2 500
57.9m (190 Ft.) Boom			
9.8	82.4	59.2	40 300
10.0	82.1	59.1	39 300
11.0	81.1	59.0	35 600
12.0	80.1	58.8	32 500
13.0	79.1	58.6	29 700
14.0	78.1	58.4	27 400
15.0	77.1	58.2	25 300
16.0	76.1	57.9	23 500
18.0	74.0	57.4	20 300
20.0	71.9	56.7	17 700
22.0	69.8	56.0	15 600
24.0	67.7	55.2	13 800
26.0	65.6	54.3	12 300
28.0	63.3	53.4	10 700
30.0	61.1	52.3	9 400
32.0	58.8	51.1	8 300
34.0	56.4	49.8	7 400

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
57.9m (190 Ft.) Boom			
36.0	54.0	48.4	6 500
38.0	51.5	46.8	5 800
40.0	48.9	45.1	5 100
42.0	46.2	43.3	4 500
44.0	43.4	41.2	4 000
46.0	40.4	38.9	3 500
48.0	37.2	36.4	3 100
50.0	33.7	33.5	2 700
52.0	29.9	30.2	2 300
54.0	25.6	26.3	2 000
61.0m (200 Ft.) Boom			
10.4	82.2	62.2	37 000
11.0	81.6	62.1	34 700
12.0	80.6	61.9	31 700
13.0	79.7	61.7	29 000
14.0	78.7	61.5	26 700
15.0	77.8	61.3	24 700
16.0	76.8	61.1	22 900
18.0	74.8	60.5	19 800
20.0	72.9	59.9	17 300
22.0	70.9	59.3	15 200
24.0	68.9	58.5	13 400
26.0	66.9	57.7	11 900
28.0	64.8	56.8	10 600
30.0	62.7	55.7	9 300
32.0	60.5	54.6	8 200
34.0	58.3	53.4	7 200
36.0	56.1	52.1	6 400
38.0	53.8	50.7	5 600
40.0	51.4	49.1	5 000
42.0	48.9	47.4	4 300
44.0	46.4	45.6	3 800
46.0	43.7	43.5	3 300
48.0	40.9	41.3	2 900
50.0	37.9	38.8	2 500
52.0	34.6	36.0	2 100

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
64.0m (210 Ft.) Boom			
11.0	82.0	65.2	33 900
12.0	81.1	65.0	30 900
13.0	80.2	64.8	28 300
14.0	79.3	64.6	26 100
15.0	78.3	64.4	24 100
16.0	77.4	64.2	22 300
18.0	75.6	63.7	19 300
20.0	73.7	63.1	16 800
22.0	71.8	62.5	14 700
24.0	69.9	61.8	13 000
26.0	68.0	61.0	11 500
28.0	66.1	60.1	10 200
30.0	64.1	59.2	9 000
32.0	62.1	58.1	7 900
34.0	60.0	57.0	7 000
36.0	57.9	55.8	6 100
38.0	55.8	54.4	5 400
40.0	53.6	53.0	4 700
42.0	51.3	51.4	4 100
44.0	48.9	49.7	3 600
46.0	46.5	47.9	3 100
48.0	43.9	45.9	2 700
50.0	41.3	43.6	2 200

Capacities based on structural competence are denoted by an asterisk (*).
Capacities indicated by (b) require 4 540 kg minimum weight.

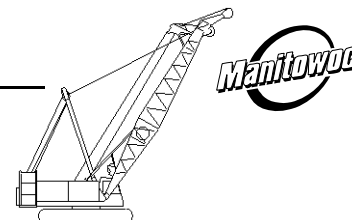

Liftcrane Boom Capacities

Boom No. 84
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

European Standards
14 m/s Maximum Wind thru 45.7m Boom
10 m/s with 48.8m thru 64.0m Boom
7 m/s with 67.1m thru 76.2m Boom
Conditions include jib when attached

555 SERIES 2

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
67.1m (220 Ft.) Boom			
11.0	82.4	68.2	33 100
12.0	81.5	68.1	30 100
13.0	80.6	67.9	27 600
14.0	79.8	67.7	25 400
15.0	78.9	67.5	23 500
16.0	78.0	67.3	21 700
18.0	76.3	66.8	18 800
20.0	74.5	66.3	16 400
22.0	72.7	65.7	14 400
24.0	70.9	65.0	12 600
26.0	69.1	64.3	11 200
28.0	67.2	63.5	9 900
30.0	65.3	62.6	8 800
32.0	63.4	61.6	7 800
34.0	61.5	60.5	6 800
36.0	59.5	59.4	6 000
38.0	57.5	58.1	5 200
40.0	55.5	56.8	4 500
42.0	53.3	55.3	3 900
44.0	51.2	53.7	3 400
46.0	48.9	52.0	2 900
48.0	46.6	50.2	2 500
50.0	44.2	48.2	2 100
70.1m (230 Ft.) Boom			
11.6	82.2	71.2	30 400
12.0	81.9	71.2	29 300
13.0	81.0	71.0	26 800
14.0	80.2	70.8	24 700
15.0	79.4	70.6	22 800
16.0	78.5	70.4	21 100
18.0	76.9	70.0	18 300
20.0	75.2	69.5	15 900
22.0	73.5	68.9	13 900
24.0	71.8	68.3	12 200
26.0	70.0	67.5	10 800
28.0	68.3	66.8	9 500
30.0	66.5	65.9	8 400
32.0	64.7	65.0	7 400
34.0	62.9	64.0	6 600

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
70.1m (230 Ft.) Boom			
36.0	61.0	62.9	5 700
38.0	59.1	61.7	5 000
40.0	57.2	60.5	4 300
42.0	55.2	59.1	3 700
44.0	53.2	57.6	3 200
46.0	51.1	56.0	2 700
48.0	48.9	54.3	2 200
50.0	46.7	52.5	1 800
73.2m (240 Ft.) Boom			
11.6	82.5	74.3	29 900 *
12.0	82.2	74.2	28 800
13.0	81.4	74.1	26 400
14.0	80.6	73.9	24 300
15.0	79.8	73.7	22 500
16.0	79.0	73.6	20 800
18.0	77.4	73.1	18 000
20.0	75.8	72.6	15 700
22.0	74.2	72.1	13 800
24.0	72.5	71.5	12 100
26.0	70.9	70.8	10 600
28.0	69.2	70.0	9 400
30.0	67.5	69.2	8 300
32.0	65.8	68.3	7 300
34.0	64.1	67.4	6 500
36.0	62.3	66.4	5 700
38.0	60.5	65.3	5 000
40.0	58.7	64.1	4 400
42.0	56.8	62.8	3 700
44.0	54.9	61.4	3 200
46.0	53.0	59.9	2 700
48.0	51.0	58.3	2 200
50.0	48.9	56.6	1 800

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
76.2m (250 Ft.) Boom			
12.2	82.4	77.3	27 600
13.0	81.8	77.2	25 800
14.0	81.0	77.0	23 700
15.0	80.2	76.8	21 900
16.0	79.5	76.7	20 300
18.0	77.9	76.2	17 500
20.0	76.4	75.8	15 200
22.0	74.8	75.2	13 300
24.0	73.3	74.7	11 700
26.0	71.7	74.0	10 300
28.0	70.1	73.3	9 000
30.0	68.5	72.5	7 900
32.0	66.8	71.7	7 000
34.0	65.2	70.8	6 200
36.0	63.5	69.8	5 400
38.0	61.8	68.8	4 700
40.0	60.1	67.6	4 100
42.0	58.3	66.4	3 500
44.0	56.5	65.1	3 000
46.0	54.7	63.7	2 500
48.0	52.8	62.2	2 000

Capacities based on structural competence are denoted by an asterisk (*).
Capacities indicated by (b) require 4 540 kg minimum weight.