




Liftcrane Boom Capacities

Boom No. 84 With Open Throat Top
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements



555 SERIES 2

LIFTING CAPACITIES: Lifting capacities for various boom lengths and operating radii are for freely suspended loads and do not exceed 75% of a static tipping load. Capacities based on structural competence are denoted by an asterisk (*). Capacities indicated by (b) require 4 540 kg minimum weight. *To maintain boom and mast stability at high boom angles, a minimum of 4 parts hoist line is required when using rear drum on 18.3m thru 24.4m boom lengths.*

Upper boom point capacity for liftcrane service with single part whip line is 13 610 kg. When boom butt mounted auxiliary drum equipped for 26 mm wire rope is used, capacity with single part whip line is 9 070 kg. In all cases, upper boom point capacities cannot exceed those listed for main boom capacity.

Weight of upper boom point, jib, all load blocks, hooks, weight ball, slings, hoist lines, etc., beneath boom and jib point sheaves, is considered part of main boom load. Boom is not to be lowered beyond radii where combined weights are greater than rated capacity. Where no capacity is shown, operation is not intended or approved.

OPERATING CONDITIONS: Machine to operate in a level position on a firm uniformly supporting surface. Refer to boom rigging **No. A03931** and Wire Rope Specification chart **No. 8482-A**. Crane operator judgment must be used to allow for dynamic load effects of swinging, hoisting or lowering, travel, wind conditions, as well as adverse operating conditions and physical machine depreciation. Refer to operators manual for operating guidelines.


MACHINE TRAVEL: Machine to travel on a firm, level and uniformly supporting surface and boom within boom angle range shown in capacity chart. Refer to Maximum Allowable Travel Specification chart **No. 8483-A**.

OPERATING RADIUS: Operating radius is horizontal distance from axis of rotation to center of vertical hoist line or load block. Boom angle is angle between horizontal and centerline of boom butt and inserts, and is an indication of operating radius. In all cases, operating radius shall govern capacity.

BOOM POINT ELEVATION: Boom point elevation is vertical distance from ground level to centerline of boom point shaft.

MACHINE EQUIPMENT: Machine equipped with 7 264 mm crawlers, 1 219 mm treads, 7 010 mm live mast, 16 part boom hoist reeving, boom support straps, rotating bed No. A01066¹ or No. A03188 (refer to I.D. plate at front of rotating bed), 44 680 kg crane counterweight and two 9 980 kg carbody counterweights.

¹WARNING: 570 kg front counterweight is required for cranes with rotating bed No. A01066 that do not have free-fall option. Counterweight can be removed only if crane has free-fall option on both front and rear drums.

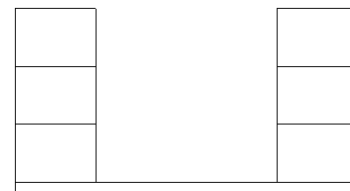

44 680 kg Crane Counterweight
6 Side Boxes

Maximum Boom and Jib Lengths Lifted Unassisted			
Over End of Blocked Crawlers		Over Side of Crawlers	
Boom Length	Jib No. 134	Boom Length	Jib No. 134
(a) 76.2m	—	67.1m	—
73.2m	—	64.0m	—
70.1m	—	61.0m	9.1m
67.1m	12.2m	57.9m	15.2m
64.0m	18.3m	54.9m	24.4m
61.0m	24.4m		
Load block, hook and weight ball on ground at start.			
(a) Upper boom point cannot be attached on 76.2m boom.			

Upper Boom Point Deduct

Deduct 590 kg from capacities when upper boom point is attached.


Load Sensor Deduct

Deduct 280 kg from boom capacities when load sensor sheaves and 3 load lines are attached.

Deduct From Capacities When Jib Is Attached

Jib Length	Jib No. 134
9.1m	1 770 kg
12.2m	2 130 kg
15.2m	2 540 kg
18.3m	2 990 kg
21.3m	3 450 kg
24.4m	3 950 kg

Consult jib chart for jib capacities. Upper boom point, third load line and load sensor sheaves for third load line must be removed when jib is attached.

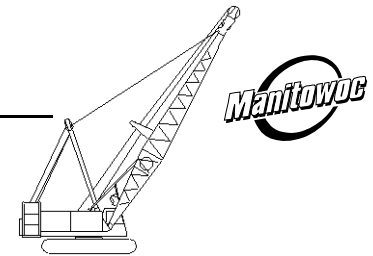

Liftcrane Boom Capacities

Boom No. 84 With Open Throat Top
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating


Meets
ANSI B30.5
Requirements

555 SERIES 2

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
18.3m (60 Ft.) Boom			
4.3	81.4	19.9	136 000 *b
4.5	80.6	19.9	135 900 *b
5.0	79.0	19.8	124 900 *b
5.5	77.4	19.7	114 100 *b
6.0	75.8	19.6	105 000 *b
7.0	72.6	19.3	88 500 b
8.0	69.3	18.9	71 200 b
9.0	65.9	18.5	59 700
10.0	62.4	18.0	51 300
11.0	58.8	17.5	44 800
12.0	55.1	16.8	39 700
13.0	51.1	16.1	35 600
14.0	47.0	15.2	32 100
15.0	42.5	14.2	29 200
16.0	37.7	13.0	26 800
18.0	25.7	9.8	22 800
21.3m (70 Ft.) Boom			
4.6	81.8	23.0	127 400 *b
5.0	80.6	22.9	123 600 *b
5.5	79.3	22.8	114 000 *b
6.0	77.9	22.7	104 900 *b
7.0	75.1	22.5	88 600 b
8.0	72.3	22.2	71 300 b
9.0	69.5	21.8	59 800
10.0	66.6	21.4	51 400
11.0	63.6	21.0	44 900
12.0	60.6	20.4	39 800
13.0	57.5	19.8	35 600
14.0	54.2	19.1	32 200
15.0	50.8	18.4	29 300
16.0	47.3	17.5	26 800
18.0	39.4	15.4	22 900
20.0	30.0	12.5	19 800
24.4m (80 Ft.) Boom			
5.2	81.4	26.0	112 800 *b
5.5	80.6	25.9	110 700 *b
6.0	79.4	25.8	105 100 *b
7.0	77.0	25.6	88 600 b
8.0	74.6	25.4	71 300 b
9.0	72.1	25.0	59 900
10.0	69.7	24.7	51 400
11.0	67.1	24.3	44 900
12.0	64.6	23.9	39 800
13.0	61.9	23.4	35 600
14.0	59.2	22.8	32 200
15.0	56.5	22.2	29 300
16.0	53.6	21.5	26 800
18.0	47.5	19.8	22 900
20.0	40.7	17.7	19 800
22.0	32.9	15.1	17 300
24.0	22.8	11.3	15 300

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
27.4m (90 Ft.) Boom			
5.5	81.7	29.0	106 200 *b
6.0	80.6	28.9	103 000 *b
7.0	78.5	28.7	88 600 b
8.0	76.3	28.5	71 300
9.0	74.2	28.2	59 800
10.0	72.0	27.9	51 400
11.0	69.8	27.6	44 900
12.0	67.5	27.2	39 800
13.0	65.3	26.8	35 600
14.0	62.9	26.3	32 200
15.0	60.6	25.7	29 300
16.0	58.1	25.1	26 900
18.0	53.1	23.8	22 800
20.0	47.7	22.1	19 800
22.0	41.7	20.1	17 300
24.0	35.0	17.6	15 300
26.0	26.8	14.2	13 600
30.5m (100 Ft.) Boom			
5.8	82.0	32.0	95 900 *b
6.0	81.6	32.0	94 800 *b
7.0	79.7	31.8	87 500 b
8.0	77.7	31.6	71 300
9.0	75.8	31.4	59 800
10.0	73.9	31.1	51 300
11.0	71.9	30.8	44 800
12.0	69.9	30.5	39 700
13.0	67.9	30.1	35 600
14.0	65.8	29.6	32 100
15.0	63.8	29.2	29 200
16.0	61.6	28.7	26 800
18.0	57.3	27.5	22 800
20.0	52.7	26.1	19 700
22.0	47.8	24.4	17 300
24.0	42.5	22.4	15 300
26.0	36.6	20.0	13 600
28.0	29.7	16.9	12 200
30.0	20.9	12.7	10 900
33.5m (110 Ft.) Boom			
6.7	81.1	35.0	86 100 *b
7.0	80.6	34.9	84 100 b
8.0	78.9	34.7	71 300
9.0	77.1	34.5	59 800
10.0	75.4	34.3	51 300
11.0	73.6	34.0	44 900
12.0	71.8	33.7	39 700
13.0	70.0	33.3	35 600
14.0	68.2	33.0	32 100
15.0	66.3	32.5	29 200

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
33.5m (110 Ft.) Boom			
16.0	64.4	32.1	26 800
18.0	60.6	31.0	22 800
20.0	56.6	29.8	19 700
22.0	52.4	28.4	17 300
24.0	47.9	26.7	15 300
26.0	43.1	24.8	13 600
28.0	37.8	22.4	12 200
30.0	31.9	19.5	11 000
32.0	24.6	15.8	9 900
36.6m (120 Ft.) Boom			
6.7	81.9	38.0	82 500 *
7.0	81.4	38.0	81 200 *
8.0	79.8	37.8	71 400
9.0	78.2	37.6	59 700
10.0	76.6	37.4	51 300
11.0	75.0	37.2	44 800
12.0	73.4	36.9	39 600
13.0	71.7	36.6	35 500
14.0	70.1	36.2	32 000
15.0	68.4	35.8	29 100
16.0	66.7	35.4	26 700
18.0	63.2	34.5	22 700
20.0	59.7	33.4	19 600
22.0	56.0	32.2	17 200
24.0	52.1	30.7	15 200
26.0	48.0	29.0	13 500
28.0	43.6	27.1	12 100
30.0	38.9	24.8	10 900
32.0	33.6	22.1	9 800
34.0	27.4	18.7	8 900
36.0	19.5	14.1	8 100

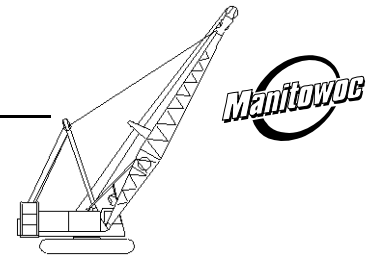

Liftcrane Boom Capacities

Boom No. 84 With Open Throat Top
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating


Meets
ANSI B30.5
Requirements

555 SERIES 2

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
39.6m (130 Ft.) Boom			
7.3	81.6	41.0	76 200 *
8.0	80.6	40.9	71 600
9.0	79.1	40.7	59 700
10.0	77.6	40.5	51 200
11.0	76.2	40.3	44 700
12.0	74.7	40.1	39 600
13.0	73.2	39.8	35 400
14.0	71.6	39.5	31 900
15.0	70.1	39.1	29 000
16.0	68.6	38.7	26 600
18.0	65.4	37.9	22 600
20.0	62.2	36.9	19 500
22.0	58.9	35.8	17 100
24.0	55.4	34.5	15 100
26.0	51.9	33.0	13 400
28.0	48.1	31.3	12 000
30.0	44.1	29.4	10 800
32.0	39.7	27.2	9 700
34.0	35.0	24.5	8 900
36.0	29.5	21.4	8 100
38.0	23.0	17.3	7 300
42.7m (140 Ft.) Boom			
7.9	81.4	44.0	68 400 *
8.0	81.3	44.0	68 000
9.0	79.9	43.8	59 900
10.0	78.5	43.7	51 100
11.0	77.2	43.5	44 600
12.0	75.8	43.2	39 400
13.0	74.4	42.9	35 200
14.0	73.0	42.7	31 800
15.0	71.6	42.3	28 900
16.0	70.2	42.0	26 400
18.0	67.3	41.2	22 500
20.0	64.3	40.3	19 400
22.0	61.3	39.3	16 900
24.0	58.2	38.1	14 900
26.0	55.0	36.8	13 300
28.0	51.7	35.3	11 900
30.0	48.1	33.6	10 700
32.0	44.4	31.7	9 600
34.0	40.4	29.5	8 700
36.0	36.1	27.0	7 900
38.0	31.3	24.0	7 200
40.0	25.6	20.3	6 500
42.0	18.5	15.4	6 000

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
45.7m (150 Ft.) Boom			
7.9	82.0	47.1	64 900 *
8.0	81.9	47.1	64 700 *
9.0	80.6	47.0	59 600
10.0	79.3	46.8	51 000
11.0	78.0	46.6	44 500
12.0	76.8	46.3	39 400
13.0	75.5	46.1	35 200
14.0	74.2	45.8	31 800
15.0	72.9	45.5	28 900
16.0	71.5	45.2	26 400
18.0	68.9	44.5	22 400
20.0	66.2	43.7	19 300
22.0	63.4	42.7	16 900
24.0	60.6	41.7	14 900
26.0	57.6	40.5	13 200
28.0	54.6	39.1	11 800
30.0	51.5	37.6	10 600
32.0	48.2	35.9	9 600
34.0	44.7	34.0	8 700
36.0	41.1	31.9	7 900
38.0	37.1	29.4	7 200
40.0	32.7	26.5	6 500
42.0	27.7	23.1	5 900
44.0	21.7	18.8	5 400
48.8m (160 Ft.) Boom			
8.5	81.7	50.1	58 700 *
9.0	81.2	50.0	57 500 *
10.0	80.0	49.9	51 000
11.0	78.8	49.7	44 400
12.0	77.6	49.5	39 300
13.0	76.4	49.2	35 100
14.0	75.2	49.0	31 600
15.0	74.0	48.7	28 700
16.0	72.7	48.4	26 300
18.0	70.3	47.7	22 300
20.0	67.7	47.0	19 200
22.0	65.2	46.1	16 700
24.0	62.6	45.1	14 700
26.0	59.9	44.0	13 100
28.0	57.1	42.8	11 700
30.0	54.3	41.4	10 500
32.0	51.3	39.9	9 400
34.0	48.2	38.2	8 500
36.0	45.0	36.3	7 700
38.0	41.6	34.2	7 000
40.0	37.9	31.8	6 400
42.0	33.9	29.0	5 800
44.0	29.4	25.8	5 300
46.0	24.2	21.9	4 800

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
51.8m (170 Ft.) Boom			
9.1	81.5	53.1	54 100 *
10.0	80.6	53.0	51 200
11.0	79.5	52.8	44 300
12.0	78.3	52.6	39 100
13.0	77.2	52.4	34 900
14.0	76.1	52.1	31 500
15.0	74.9	51.9	28 600
16.0	73.8	51.6	26 100
18.0	71.5	51.0	22 200
20.0	69.1	50.2	19 100
22.0	66.7	49.4	16 600
24.0	64.3	48.5	14 600
26.0	61.8	47.5	12 900
28.0	59.3	46.4	11 600
30.0	56.7	45.1	10 400
32.0	54.0	43.7	9 300
34.0	51.2	42.2	8 400
36.0	48.3	40.5	7 600
38.0	45.3	38.6	6 900
40.0	42.1	36.5	6 300
42.0	38.6	34.2	5 700
44.0	34.9	31.5	5 200
46.0	30.9	28.4	4 700
48.0	26.2	24.7	4 200
50.0	20.7	20.1	3 800

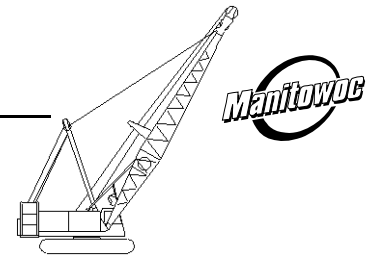

Liftcrane Boom Capacities

Boom No. 84 With Open Throat Top
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating


Meets
 ANSI B30.5
 Requirements

555 SERIES 2

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
54.9m (180 Ft.) Boom			
9.1	82.0	56.2	51 300 *
10.0	81.1	56.0	49 300
11.0	80.1	55.9	44 200
12.0	79.0	55.7	39 000
13.0	77.9	55.5	34 900
14.0	76.9	55.3	31 400
15.0	75.8	55.0	28 500
16.0	74.7	54.8	26 000
18.0	72.5	54.2	22 000
20.0	70.3	53.5	18 900
22.0	68.1	52.7	16 500
24.0	65.8	51.9	14 500
26.0	63.5	50.9	12 800
28.0	61.1	49.9	11 400
30.0	58.7	48.7	10 200
32.0	56.3	47.5	9 200
34.0	53.7	46.1	8 300
36.0	51.1	44.5	7 400
38.0	48.3	42.8	6 700
40.0	45.5	41.0	6 100
42.0	42.5	38.9	5 500
44.0	39.3	36.6	5 000
46.0	35.8	34.0	4 500
48.0	32.1	31.0	4 100
50.0	27.9	27.5	3 700
52.0	23.1	23.3	3 300
57.9m (190 Ft.) Boom			
9.8	81.8	59.2	44 900 *
10.0	81.6	59.1	44 700 *
11.0	80.6	59.0	43 400
12.0	79.6	58.8	39 000
13.0	78.6	58.6	34 800
14.0	77.6	58.4	31 300
15.0	76.5	58.2	28 400
16.0	75.5	57.9	25 900
18.0	73.5	57.4	21 900
20.0	71.4	56.7	18 800
22.0	69.3	56.0	16 400
24.0	67.2	55.2	14 400
26.0	65.0	54.3	12 700
28.0	62.8	53.3	11 300
30.0	60.5	52.3	10 100
32.0	58.2	51.1	9 100
34.0	55.9	49.8	8 200
36.0	53.5	48.4	7 400
38.0	51.0	46.8	6 700
40.0	48.4	45.1	6 000

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
57.9m (190 Ft.) Boom			
42.0	45.7	43.3	5 400
44.0	42.8	41.2	4 900
46.0	39.8	38.9	4 500
48.0	36.6	36.4	4 000
50.0	33.2	33.5	3 600
52.0	29.4	30.2	3 200
54.0	25.0	26.3	2 900
56.0	19.8	21.5	2 600
61.0m (200 Ft.) Boom			
10.4	81.7	62.2	42 200 *
11.0	81.1	62.1	41 000 *
12.0	80.1	61.9	38 700
13.0	79.1	61.7	35 000
14.0	78.2	61.5	31 200
15.0	77.2	61.3	28 200
16.0	76.3	61.1	25 800
18.0	74.3	60.5	21 800
20.0	72.4	59.9	18 700
22.0	70.4	59.3	16 200
24.0	68.4	58.5	14 200
26.0	66.3	57.7	12 600
28.0	64.3	56.7	11 100
30.0	62.2	55.7	10 000
32.0	60.0	54.6	8 900
34.0	57.8	53.4	8 000
36.0	55.6	52.1	7 200
38.0	53.2	50.7	6 500
40.0	50.9	49.1	5 900
42.0	48.4	47.4	5 300
44.0	45.8	45.6	4 800
46.0	43.1	43.5	4 300
48.0	40.3	41.3	3 900
50.0	37.3	38.8	3 500
52.0	34.1	36.0	3 100
54.0	30.6	32.9	2 700
56.0	26.7	29.2	2 500
58.0	22.1	24.8	2 200

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
64.0m (210 Ft.) Boom			
11.0	81.5	65.2	38 700 *
12.0	80.6	65.0	37 100 *
13.0	79.7	64.8	34 700
14.0	78.8	64.6	31 100
15.0	77.8	64.4	28 200
16.0	76.9	64.2	25 700
18.0	75.1	63.7	21 700
20.0	73.2	63.1	18 600
22.0	71.3	62.5	16 100
24.0	69.4	61.8	14 100
26.0	67.5	61.0	12 400
28.0	65.6	60.1	11 000
30.0	63.6	59.2	9 800
32.0	61.6	58.1	8 800
34.0	59.5	57.0	7 900
36.0	57.4	55.8	7 100
38.0	55.3	54.4	6 400
40.0	53.1	53.0	5 700
42.0	50.8	51.4	5 200
44.0	48.4	49.7	4 600
46.0	46.0	47.9	4 200
48.0	43.4	45.8	3 700
50.0	40.8	43.6	3 300
52.0	37.9	41.2	3 000
54.0	34.9	38.5	2 600
56.0	31.7	35.5	2 300
58.0	28.1	32.0	2 000

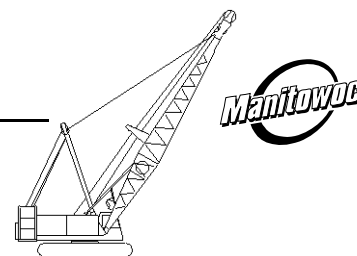

Liftcrane Boom Capacities

Boom No. 84 With Open Throat Top
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements

555 SERIES 2

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
67.1m (220 Ft.) Boom			
11.0	81.9	68.2	36 500 *
12.0	81.0	68.1	35 000 *
13.0	80.1	67.9	33 300
14.0	79.3	67.7	31 100
15.0	78.4	67.5	28 200
16.0	77.5	67.3	25 500
18.0	75.8	66.8	21 500
20.0	74.0	66.3	18 400
22.0	72.2	65.7	15 900
24.0	70.4	65.0	14 000
26.0	68.6	64.3	12 300
28.0	66.7	63.5	10 900
30.0	64.9	62.5	9 700
32.0	63.0	61.6	8 600
34.0	61.0	60.5	7 700
36.0	59.1	59.4	6 900
38.0	57.0	58.1	6 200
40.0	55.0	56.8	5 500
42.0	52.9	55.3	5 000
44.0	50.7	53.7	4 500
46.0	48.5	52.0	4 000
48.0	46.1	50.2	3 600
50.0	43.7	48.2	3 200
52.0	41.2	46.0	2 800
54.0	38.5	43.6	2 500
56.0	35.7	40.9	2 100
70.1m (230 Ft.) Boom			
11.6	81.8	71.2	35 300 *
12.0	81.4	71.2	35 200 *
13.0	80.6	71.0	33 800
14.0	79.7	70.8	31 000
15.0	78.9	70.6	28 000
16.0	78.1	70.4	25 400
18.0	76.4	70.0	21 300
20.0	74.7	69.5	18 300
22.0	73.0	68.9	15 800
24.0	71.3	68.2	13 800
26.0	69.6	67.5	12 100
28.0	67.8	66.7	10 700
30.0	66.0	65.9	9 500
32.0	64.2	65.0	8 500
34.0	62.4	64.0	7 600
36.0	60.5	62.9	6 800
38.0	58.6	61.7	6 100
40.0	56.7	60.4	5 400
42.0	54.7	59.1	4 900
44.0	52.7	57.6	4 300
46.0	50.6	56.0	3 900
48.0	48.5	54.3	3 500
50.0	46.3	52.5	3 000
52.0	43.9	50.5	2 700
54.0	41.5	48.3	2 300
56.0	39.0	46.0	2 000

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
73.2m (240 Ft.) Boom			
12.2	81.6	74.2	29 900 *
13.0	81.0	74.1	29 900 *
14.0	80.2	73.9	29 400
15.0	79.4	73.7	27 500
16.0	78.6	73.6	25 400
18.0	77.0	73.1	21 200
20.0	75.4	72.6	18 100
22.0	73.7	72.1	15 700
24.0	72.1	71.4	13 700
26.0	70.5	70.8	12 000
28.0	68.8	70.0	10 600
30.0	67.1	69.2	9 400
32.0	65.4	68.3	8 300
34.0	63.6	67.4	7 400
36.0	61.9	66.4	6 600
38.0	60.1	65.2	5 900
40.0	58.3	64.1	5 300
42.0	56.4	62.8	4 700
44.0	54.5	61.4	4 200
46.0	52.6	59.9	3 700
48.0	50.6	58.3	3 300
50.0	48.5	56.6	2 900
52.0	46.4	54.8	2 500
54.0	44.2	52.8	2 200
56.0	41.9	50.7	1 900
76.2m (250 Ft.) Boom			
12.2	82.0	77.3	28 600 *
13.0	81.3	77.2	28 400 *
14.0	80.6	77.0	28 000
15.0	79.8	76.8	27 200
16.0	79.0	76.7	25 500
18.0	77.5	76.2	21 100
20.0	76.0	75.8	18 000
22.0	74.4	75.2	15 500
24.0	72.8	74.7	13 500
26.0	71.3	74.0	11 900
28.0	69.7	73.3	10 500
30.0	68.1	72.5	9 200
32.0	66.4	71.7	8 200
34.0	64.8	70.8	7 300
36.0	63.1	69.8	6 500
38.0	61.4	68.7	5 800
40.0	59.7	67.6	5 100
42.0	57.9	66.4	4 600
44.0	56.1	65.1	4 000
46.0	54.3	63.7	3 600
48.0	52.4	62.2	3 100
50.0	50.5	60.6	2 700
52.0	48.5	58.9	2 400
54.0	46.5	57.1	2 100