

Liftcrane Boom Capacities

Boom No. 84 With Open Throat Top
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
Rating Over End of Blocked Crawlers
No Travel - Limited Swing

Meets
ANSI B30.5
Requirements

555 SERIES 2

LIFTING CAPACITIES: Lifting capacities for various boom lengths and operating radii are for freely suspended loads and do not exceed 75% of a static tipping load over end of machine with crawlers blocked. Capacities based on structural competence are denoted by an asterisk (*). Capacities indicated by (b) require 4 540 kg minimum weight. *To maintain boom and mast stability at high boom angles, a minimum of 4 parts hoist line is required when using rear drum on 18.3m thru 24.4m boom lengths.*

Upper boom point capacity for liftcrane service with single part whip line is 13 610 kg. When boom butt mounted auxiliary drum equipped for 26 mm wire rope is used, capacity with single part whip line is 9 070 kg. In all cases, upper boom point capacities cannot exceed those listed for main boom capacity.

Weight of upper boom point, jib, all load blocks, hooks, weight ball, slings, hoist lines, etc., beneath boom and jib point sheaves, is considered part of main boom load. Boom is not to be lowered beyond radii where combined weights are greater than rated capacity. Where no capacity is shown, operation is not intended or approved.

OPERATING CONDITIONS: Machine to operate in a level position on a firm uniformly supporting surface. Drive and idler tumblers must be properly blocked so that centerline of tumblers becomes tipping fulcrum. Swing is limited to that sector shown on Operating Range Diagram No. 8448-A. Refer to boom rigging No. A03931 and Wire Rope Specification chart No. 8482-A. Crane operator judgment must be used to allow for dynamic load effects of swinging, hoisting or lowering, wind


conditions, as well as adverse operating conditions and physical machine depreciation. Refer to operators manual for operating guidelines.

OPERATING RADIUS: Operating radius is horizontal distance from axis of rotation to center of vertical hoist line or load block. Boom angle is angle between horizontal and centerline of boom butt and inserts, and is an indication of operating radius. In all cases, operating radius shall govern capacity.

BOOM POINT ELEVATION: Boom point elevation is vertical distance from ground level to centerline of boom point shaft.

MACHINE EQUIPMENT: Machine equipped with 7 264 mm crawlers, 1 219 mm treads, 7 010 mm live mast, 16 part boom hoist reeving, boom support straps, rotating bed No. A01066¹ or No. A03188 (refer to I.D. plate at front of rotating bed), 44 680 kg crane counterweight and two 9 980 kg carbody counterweights.

¹WARNING: 570 kg front counterweight is required for cranes with rotating bed No. A01066 that do not have free-fall option. Counterweight can be removed only if crane has free-fall option on both front and rear drums.



44 680 kg Crane Counterweight
6 Side Boxes

Maximum Boom and Jib Lengths Lifted Unassisted Over End of Blocked Crawlers	
Boom Length	Jib No. 134
(a) 76.2m	—
73.2m	—
70.1m	—
67.1m	12.2m
64.0m	18.3m
61.0m	24.4m
Load block, hook and weight ball on ground at start. (a) Upper boom point cannot be attached on 76.2m boom.	

Upper Boom Point Deduct
Deduct 590 kg from capacities when upper boom point is attached.

Load Sensor Deduct
Deduct 280 kg from boom capacities when load sensor sheaves and 3 load lines are attached.


Deduct From Capacities When Jib Is Attached	
Jib Length	Jib No. 134
9.1m	1 770 kg
12.2m	2 130 kg
15.2m	2 540 kg
18.3m	2 990 kg
21.3m	3 450 kg
24.4m	3 950 kg

Consult jib chart for jib capacities. Upper boom point, third load line and load sensor sheaves for third load line must be removed when jib is attached.

Liftcrane Boom Capacities

Boom No. 84 With Open Throat Top
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
Rating Over End of Blocked Crawlers
No Travel - Limited Swing

Meets
 ANSI B30.5
 Requirements

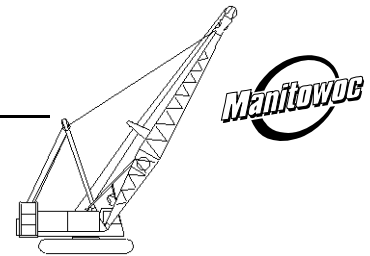


555 SERIES 2

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
18.3m (60 Ft.) Boom			
4.3	81.4	19.9	136 000 *b
4.5	80.6	19.9	135 900 *b
5.0	79.0	19.8	124 900 *b
5.5	77.4	19.7	114 100 *b
6.0	75.8	19.6	105 000 *b
7.0	72.6	19.3	90 400 *b
8.0	69.3	18.9	79 200 *b
9.0	65.9	18.5	70 000 *
10.0	62.4	18.0	62 300 *
11.0	58.8	17.5	56 100
12.0	55.1	16.8	49 800
13.0	51.1	16.1	44 300
14.0	47.0	15.2	39 900
15.0	42.5	14.2	36 200
16.0	37.7	13.0	33 100
18.0	25.7	9.8	28 000
21.3m (70 Ft.) Boom			
4.6	81.8	23.0	127 400 *b
5.0	80.6	22.9	123 600 *b
5.5	79.3	22.8	114 000 *b
6.0	77.9	22.7	104 900 *b
7.0	75.1	22.5	90 300 *b
8.0	72.3	22.2	79 100 *b
9.0	69.5	21.8	70 000 *
10.0	66.6	21.4	62 300 *
11.0	63.6	21.0	56 100
12.0	60.6	20.4	50 000
13.0	57.5	19.8	44 400
14.0	54.2	19.1	40 000
15.0	50.8	18.4	36 300
16.0	47.3	17.5	33 200
18.0	39.4	15.4	28 200
20.0	30.0	12.5	24 300
24.4m (80 Ft.) Boom			
5.2	81.4	26.0	112 800 *b
5.5	80.6	25.9	110 700 *b
6.0	79.4	25.8	105 100 *b
7.0	77.0	25.6	90 100 *b
8.0	74.6	25.4	78 900 *b
9.0	72.1	25.0	69 900 *
10.0	69.7	24.7	62 200 *
11.0	67.1	24.3	56 000
12.0	64.6	23.9	50 000
13.0	61.9	23.4	44 400
14.0	59.2	22.8	40 000
15.0	56.5	22.2	36 300
16.0	53.6	21.5	33 200
18.0	47.5	19.8	28 200
20.0	40.7	17.7	24 400
22.0	32.9	15.1	21 300
24.0	22.8	11.3	18 800

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
27.4m (90 Ft.) Boom			
5.5	81.7	29.0	106 200 *b
6.0	80.6	28.9	103 000 *b
7.0	78.5	28.7	90 100 *b
8.0	76.3	28.5	78 800 *
9.0	74.2	28.2	69 800 *
10.0	72.0	27.9	62 200 *
11.0	69.8	27.6	55 900
12.0	67.5	27.2	50 000
13.0	65.3	26.8	44 500
14.0	62.9	26.3	40 000
15.0	60.6	25.7	36 300
16.0	58.1	25.1	33 200
18.0	53.1	23.8	28 200
20.0	47.7	22.1	24 400
22.0	41.7	20.1	21 300
24.0	35.0	17.6	18 900
26.0	26.8	14.2	16 900
30.5m (100 Ft.) Boom			
5.8	82.0	32.0	95 900 *b
6.0	81.6	32.0	94 800 *b
7.0	79.7	31.8	88 900 *b
8.0	77.7	31.6	78 500 *
9.0	75.8	31.4	69 600 *
10.0	73.9	31.1	62 000 *
11.0	71.9	30.8	55 800
12.0	69.9	30.5	50 000
13.0	67.9	30.1	44 400
14.0	65.8	29.6	40 000
15.0	63.8	29.2	36 200
16.0	61.6	28.7	33 100
18.0	57.3	27.5	28 100
20.0	52.7	26.1	24 300
22.0	47.8	24.4	21 300
24.0	42.5	22.4	18 800
26.0	36.6	20.0	16 800
28.0	29.7	16.9	15 100
30.0	20.9	12.7	13 600
33.5m (110 Ft.) Boom			
6.7	81.1	35.0	86 100 *b
7.0	80.6	34.9	84 800 *b
8.0	78.9	34.7	78 600 *
9.0	77.1	34.5	69 600 *
10.0	75.4	34.3	62 000 *
11.0	73.6	34.0	55 800
12.0	71.8	33.7	50 000
13.0	70.0	33.3	44 400
14.0	68.2	33.0	40 000
15.0	66.3	32.5	36 300

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
33.5m (110 Ft.) Boom			
16.0	64.4	32.1	33 100
18.0	60.6	31.0	28 100
20.0	56.6	29.8	24 300
22.0	52.4	28.4	21 300
24.0	47.9	26.7	18 900
26.0	43.1	24.8	16 800
28.0	37.8	22.4	15 100
30.0	31.9	19.5	13 700
32.0	24.6	15.8	12 400
36.6m (120 Ft.) Boom			
6.7	81.9	38.0	82 500 *
7.0	81.4	38.0	81 200 *
8.0	79.8	37.8	77 000 *
9.0	78.2	37.6	69 500 *
10.0	76.6	37.4	61 900 *
11.0	75.0	37.2	55 600
12.0	73.4	36.9	50 000
13.0	71.7	36.6	44 300
14.0	70.1	36.2	39 900
15.0	68.4	35.8	36 200
16.0	66.7	35.4	33 100
18.0	63.2	34.5	28 000
20.0	59.7	33.4	24 200
22.0	56.0	32.2	21 200
24.0	52.1	30.7	18 800
26.0	48.0	29.0	16 700
28.0	43.6	27.1	15 100
30.0	38.9	24.8	13 600
32.0	33.6	22.1	12 300
34.0	27.4	18.7	11 200
36.0	19.5	14.1	10 200

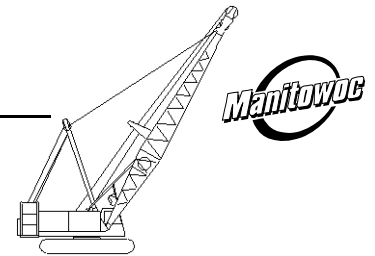

Liftcrane Boom Capacities

Boom No. 84 With Open Throat Top
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
Rating Over End of Blocked Crawlers
No Travel - Limited Swing

Meets
ANSI B30.5
Requirements

555 SERIES 2

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
39.6m (130 Ft.) Boom			
7.3	81.6	41.0	76 200 *
8.0	80.6	40.9	73 700 *
9.0	79.1	40.7	69 100 *
10.0	77.6	40.5	61 700 *
11.0	76.2	40.3	55 500 *
12.0	74.7	40.1	49 900
13.0	73.2	39.8	44 300
14.0	71.6	39.5	39 800
15.0	70.1	39.1	36 100
16.0	68.6	38.7	33 000
18.0	65.4	37.9	28 000
20.0	62.2	36.9	24 200
22.0	58.9	35.8	21 200
24.0	55.4	34.5	18 700
26.0	51.9	33.0	16 600
28.0	48.1	31.3	15 000
30.0	44.1	29.4	13 500
32.0	39.7	27.2	12 200
34.0	35.0	24.5	11 200
36.0	29.5	21.4	10 200
38.0	23.0	17.3	9 300
42.7m (140 Ft.) Boom			
7.9	81.4	44.0	68 400 *
8.0	81.3	44.0	68 200 *
9.0	79.9	43.8	65 100 *
10.0	78.5	43.7	61 600 *
11.0	77.2	43.5	55 300 *
12.0	75.8	43.2	49 700
13.0	74.4	42.9	44 200
14.0	73.0	42.7	39 700
15.0	71.6	42.3	36 000
16.0	70.2	42.0	32 900
18.0	67.3	41.2	27 900
20.0	64.3	40.3	24 000
22.0	61.3	39.3	21 000
24.0	58.2	38.1	18 500
26.0	55.0	36.8	16 500
28.0	51.7	35.3	14 800
30.0	48.1	33.6	13 400
32.0	44.4	31.7	12 100
34.0	40.4	29.5	11 000
36.0	36.1	27.0	10 100
38.0	31.3	24.0	9 200
40.0	25.6	20.3	8 400
42.0	18.5	15.4	7 700


Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
45.7m (150 Ft.) Boom			
7.9	82.0	47.1	64 900 *
8.0	81.9	47.1	64 700 *
9.0	80.6	47.0	61 800 *
10.0	79.3	46.8	59 100 *
11.0	78.0	46.6	55 300 *
12.0	76.8	46.3	49 700
13.0	75.5	46.1	44 200
14.0	74.2	45.8	39 700
15.0	72.9	45.5	35 900
16.0	71.5	45.2	32 800
18.0	68.9	44.5	27 800
20.0	66.2	43.7	24 000
22.0	63.4	42.7	20 900
24.0	60.6	41.7	18 500
26.0	57.6	40.5	16 500
28.0	54.6	39.1	14 800
30.0	51.5	37.6	13 300
32.0	48.2	35.9	12 100
34.0	44.7	34.0	11 000
36.0	41.1	31.9	10 000
38.0	37.1	29.4	9 200
40.0	32.7	26.5	8 400
42.0	27.7	23.1	7 700
44.0	21.7	18.8	7 100
48.8m (160 Ft.) Boom			
8.5	81.7	50.1	58 700 *
9.0	81.2	50.0	57 500 *
10.0	80.0	49.9	55 000 *
11.0	78.8	49.7	52 600 *
12.0	77.6	49.5	49 500
13.0	76.4	49.2	44 400
14.0	75.2	49.0	39 600
15.0	74.0	48.7	35 800
16.0	72.7	48.4	32 700
18.0	70.3	47.7	27 700
20.0	67.7	47.0	23 800
22.0	65.2	46.1	20 800
24.0	62.6	45.1	18 400
26.0	59.9	44.0	16 300
28.0	57.1	42.8	14 600
30.0	54.3	41.4	13 200
32.0	51.3	39.9	11 900
34.0	48.2	38.2	10 900
36.0	45.0	36.3	9 900
38.0	41.6	34.2	9 000
40.0	37.9	31.8	8 300
42.0	33.9	29.0	7 600
44.0	29.4	25.8	7 000
46.0	24.2	21.9	6 400

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
51.8m (170 Ft.) Boom			
9.1	81.5	53.1	54 100 *
10.0	80.6	53.0	52 100 *
11.0	79.5	52.8	49 800 *
12.0	78.3	52.6	47 800 *
13.0	77.2	52.4	44 400
14.0	76.1	52.1	39 500
15.0	74.9	51.9	35 800
16.0	73.8	51.6	32 600
18.0	71.5	51.0	27 500
20.0	69.1	50.2	23 700
22.0	66.7	49.4	20 700
24.0	64.3	48.5	18 200
26.0	61.8	47.5	16 200
28.0	59.3	46.4	14 500
30.0	56.7	45.1	13 100
32.0	54.0	43.7	11 800
34.0	51.2	42.2	10 700
36.0	48.3	40.5	9 800
38.0	45.3	38.6	8 900
40.0	42.1	36.5	8 200
42.0	38.6	34.2	7 500
44.0	34.9	31.5	6 900
46.0	30.9	28.4	6 300
48.0	26.2	24.7	5 800
50.0	20.7	20.1	5 300
54.9m (180 Ft.) Boom			
9.1	82.0	56.2	51 300 *
10.0	81.1	56.0	49 400 *
11.0	80.1	55.9	47 300 *
12.0	79.0	55.7	45 300 *
13.0	77.9	55.5	42 900
14.0	76.9	55.3	39 600
15.0	75.8	55.0	35 800
16.0	74.7	54.8	32 500
18.0	72.5	54.2	27 400
20.0	70.3	53.5	23 600
22.0	68.1	52.7	20 600
24.0	65.8	51.9	18 100
26.0	63.5	50.9	16 100
28.0	61.1	49.9	14 400
30.0	58.7	48.7	12 900
32.0	56.3	47.5	11 700
34.0	53.7	46.1	10 600
36.0	51.1	44.5	9 600
38.0	48.3	42.8	8 800
40.0	45.5	41.0	8 000
42.0	42.5	38.9	7 300
44.0	39.3	36.6	6 700
46.0	35.8	34.0	6 100
48.0	32.1	31.0	5 600
50.0	27.9	27.5	5 200
52.0	23.1	23.3	4 700

Liftcrane Boom Capacities

Boom No. 84 With Open Throat Top
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
Rating Over End of Blocked Crawlers
No Travel - Limited Swing

Meets
 ANSI B30.5
 Requirements

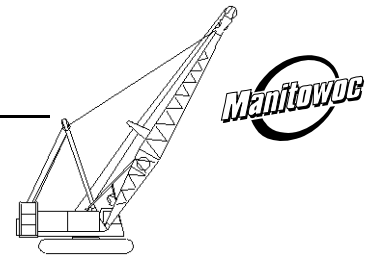


555 SERIES 2

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
57.9m (190 Ft.) Boom			
9.8	81.8	59.2	44 900 *
10.0	81.6	59.1	44 700 *
11.0	80.6	59.0	43 400 *
12.0	79.6	58.8	41 600 *
13.0	78.6	58.6	39 800 *
14.0	77.6	58.4	38 000
15.0	76.5	58.2	35 400
16.0	75.5	57.9	32 600
18.0	73.5	57.4	27 400
20.0	71.4	56.7	23 500
22.0	69.3	56.0	20 500
24.0	67.2	55.2	18 000
26.0	65.0	54.3	16 000
28.0	62.8	53.3	14 300
30.0	60.5	52.3	12 800
32.0	58.2	51.1	11 600
34.0	55.9	49.8	10 500
36.0	53.5	48.4	9 500
38.0	51.0	46.8	8 700
40.0	48.4	45.1	7 900
42.0	45.7	43.3	7 200
44.0	42.8	41.2	6 600
46.0	39.8	38.9	6 100
48.0	36.6	36.4	5 600
50.0	33.2	33.5	5 100
52.0	29.4	30.2	4 700
54.0	25.0	26.3	4 300
56.0	19.8	21.5	3 900
61.0m (200 Ft.) Boom			
10.4	81.7	62.2	42 200 *
11.0	81.1	62.1	41 000 *
12.0	80.1	61.9	39 300 *
13.0	79.1	61.7	37 700 *
14.0	78.2	61.5	36 100 *
15.0	77.2	61.3	34 600 *
16.0	76.3	61.1	32 400
18.0	74.3	60.5	27 200
20.0	72.4	59.9	23 400
22.0	70.4	59.3	20 300
24.0	68.4	58.5	17 900
26.0	66.3	57.7	15 800
28.0	64.3	56.7	14 100
30.0	62.2	55.7	12 700
32.0	60.0	54.6	11 400
34.0	57.8	53.4	10 400
36.0	55.6	52.1	9 400
38.0	53.2	50.7	8 600
40.0	50.9	49.1	7 800
42.0	48.4	47.4	7 100

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
61.0m (200 Ft.) Boom			
44.0	45.8	45.6	6 500
46.0	43.1	43.5	5 900
48.0	40.3	41.3	5 400
50.0	37.3	38.8	4 900
52.0	34.1	36.0	4 500
54.0	30.6	32.9	4 100
56.0	26.7	29.2	3 700
58.0	22.1	24.8	3 400
64.0m (210 Ft.) Boom			
11.0	81.5	65.2	38 700 *
12.0	80.6	65.0	37 100 *
13.0	79.7	64.8	35 600 *
14.0	78.8	64.6	34 100 *
15.0	77.8	64.4	32 600 *
16.0	76.9	64.2	31 200
18.0	75.1	63.7	27 300
20.0	73.2	63.1	23 300
22.0	71.3	62.5	20 200
24.0	69.4	61.8	17 700
26.0	67.5	61.0	15 700
28.0	65.6	60.1	14 000
30.0	63.6	59.2	12 600
32.0	61.6	58.1	11 300
34.0	59.5	57.0	10 200
36.0	57.4	55.8	9 300
38.0	55.3	54.4	8 400
40.0	53.1	53.0	7 700
42.0	50.8	51.4	7 000
44.0	48.4	49.7	6 400
46.0	46.0	47.9	5 800
48.0	43.4	45.8	5 300
50.0	40.8	43.6	4 800
52.0	37.9	41.2	4 400
54.0	34.9	38.5	4 000
56.0	31.7	35.5	3 600
58.0	28.1	32.0	3 300
60.0	24.0	27.9	2 900
62.0	19.1	22.8	2 700

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
67.1m (220 Ft.) Boom			
11.0	81.9	68.2	36 500 *
12.0	81.0	68.1	35 000 *
13.0	80.1	67.9	33 600 *
14.0	79.3	67.7	32 200 *
15.0	78.4	67.5	30 800 *
16.0	77.5	67.3	29 500 *
18.0	75.8	66.8	26 800
20.0	74.0	66.3	23 100
22.0	72.2	65.7	20 100
24.0	70.4	65.0	17 600
26.0	68.6	64.3	15 600
28.0	66.7	63.5	13 900
30.0	64.9	62.5	12 400
32.0	63.0	61.6	11 200
34.0	61.0	60.5	10 000
36.0	59.1	59.4	9 100
38.0	57.0	58.1	8 200
40.0	55.0	56.8	7 500
42.0	52.9	55.3	6 800
44.0	50.7	53.7	6 200
46.0	48.5	52.0	5 600
48.0	46.1	50.2	5 100
50.0	43.7	48.2	4 600
52.0	41.2	46.0	4 200
54.0	38.5	43.6	3 800
56.0	35.7	40.9	3 500
58.0	32.6	38.0	3 100
60.0	29.3	34.7	2 800
62.0	25.6	30.8	2 400
64.0	21.3	26.2	1 900 *

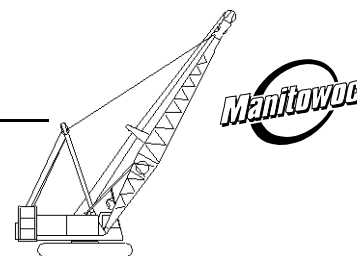

Liftcrane Boom Capacities

Boom No. 84 With Open Throat Top
44 680 kg Crane Counterweight
19 960 kg Carbody Counterweight
Rating Over End of Blocked Crawlers
No Travel - Limited Swing

Meets
 ANSI B30.5
 Requirements

555 SERIES 2

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
70.1m (230 Ft.) Boom			
11.6	81.8	71.2	35 300 *
12.0	81.4	71.2	35 200 *
13.0	80.6	71.0	34 800 *
14.0	79.7	70.8	34 500 *
15.0	78.9	70.6	33 900 *
16.0	78.1	70.4	32 200
18.0	76.4	70.0	26 900
20.0	74.7	69.5	23 000
22.0	73.0	68.9	19 900
24.0	71.3	68.2	17 500
26.0	69.6	67.5	15 400
28.0	67.8	66.7	13 700
30.0	66.0	65.9	12 300
32.0	64.2	65.0	11 000
34.0	62.4	64.0	10 000
36.0	60.5	62.9	9 000
38.0	58.6	61.7	8 100
40.0	56.7	60.4	7 400
42.0	54.7	59.1	6 700
44.0	52.7	57.6	6 100
46.0	50.6	56.0	5 500
48.0	48.5	54.3	5 000
50.0	46.3	52.5	4 500
52.0	43.9	50.5	4 100
54.0	41.5	48.3	3 700
56.0	39.0	46.0	3 300
58.0	36.3	43.4	3 000
60.0	33.5	40.5	2 700
62.0	30.4	37.3	2 400
64.0	27.0	33.6	2 100

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
73.2m (240 Ft.) Boom			
12.2	81.6	74.2	29 900 *
13.0	81.0	74.1	29 900 *
14.0	80.2	73.9	29 900 *
15.0	79.4	73.7	29 900 *
16.0	78.6	73.6	29 600 *
18.0	77.0	73.1	26 900
20.0	75.4	72.6	22 800
22.0	73.7	72.1	19 800
24.0	72.1	71.4	17 300
26.0	70.5	70.8	15 300
28.0	68.8	70.0	13 600
30.0	67.1	69.2	12 100
32.0	65.4	68.3	10 900
34.0	63.6	67.4	9 800
36.0	61.9	66.4	8 800
38.0	60.1	65.2	8 000
40.0	58.3	64.1	7 200
42.0	56.4	62.8	6 500
44.0	54.5	61.4	5 900
46.0	52.6	59.9	5 400
48.0	50.6	58.3	4 800
50.0	48.5	56.6	4 400
52.0	46.4	54.8	3 900
54.0	44.2	52.8	3 500
56.0	41.9	50.7	3 200
58.0	39.5	48.3	2 800
60.0	36.9	45.8	2 500
62.0	34.2	43.0	2 200
64.0	31.3	39.9	1 900

Oper. Rad. Meters	Boom Ang. Deg.	Boom Point Elev. Meters	Boom Capacity Kilograms
76.2m (250 Ft.) Boom			
12.2	82.0	77.3	28 600 *
13.0	81.3	77.2	28 400 *
14.0	80.6	77.0	28 000 *
15.0	79.8	76.8	27 400 *
16.0	79.0	76.7	26 900 *
18.0	77.5	76.2	25 900 *
20.0	76.0	75.8	22 700
22.0	74.4	75.2	19 600
24.0	72.8	74.7	17 200
26.0	71.3	74.0	15 200
28.0	69.7	73.3	13 500
30.0	68.1	72.5	12 000
32.0	66.4	71.7	10 700
34.0	64.8	70.8	9 600
36.0	63.1	69.8	8 700
38.0	61.4	68.7	7 800
40.0	59.7	67.6	7 100
42.0	57.9	66.4	6 400
44.0	56.1	65.1	5 800
46.0	54.3	63.7	5 200
48.0	52.4	62.2	4 700
50.0	50.5	60.6	4 200
52.0	48.5	58.9	3 800
54.0	46.5	57.1	3 400
56.0	44.4	55.1	3 100
58.0	42.2	53.0	2 700
60.0	39.9	50.7	2 400
62.0	37.5	48.2	2 100
64.0	34.9	45.5	1 800