


Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
Boom No. 79-44 with 130 Ft. Mast No. 44
169,200 Lb. Crane Counterweight
60,000 Lb. Carbody Counterweight
240,000 Lb. and 462,000 Lb. Wheeled Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

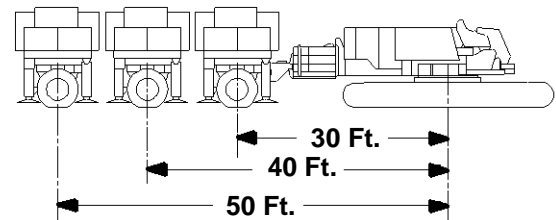

LIFTING CAPACITIES: Chart supplements boom capacity chart series No. 8252. Lifting capacities for various boom lengths, jib lengths and jib operating radii are for freely suspended loads and do not exceed 75% of a static tipping load. Capacities based on structural competence are denoted by an asterisk (*). Capacities indicated by (b) require 4,425 Lb. minimum block weight with 4 part hoist line reeving on 40 Ft. jib and 3 part on 60 Ft. jib.

Wheeled counterweight must be attached to support beam and MAX-ER mode must be selected to operate. Swing and travel (forward or side crawl) requires proper position of counterweight wheels when contacting ground. Exit MAX-ER mode before operating without wheeled counterweight.

Weight of all load blocks, hooks, weight ball, slings, hoist lines, etc., beneath boom and jib point sheaves, is considered part of jib load. Boom and jib are not to be lowered beyond radii where combined weights are greater than rated capacity. Where no capacity is shown, operation is not intended or approved.

OPERATING CONDITIONS: Machine to operate on a firm uniformly supporting surface with gantry in intermediate position and mast up. Refer to boom rigging No. 195224, jib assembly No. 192352, Wire Rope Specification chart No. 8262-A and Counterweight Arrangement chart No. 8412-A. Crane operator judgment must be used to allow for dynamic load effects of swinging, hoisting or lowering, travel, wind conditions, as well as adverse operating conditions and physical machine depreciation. Refer to operators manual for operating guidelines.

MACHINE TRAVEL: Machine to travel on a firm, level and uniformly supporting surface with boom within boom angle range shown in capacity chart. Travel may be limited depending upon ground conditions. Refer to Maximum Allowable Travel Specification chart No. 8263-A when operating without load.

OPERATING RADIUS: Operating radius is horizontal distance from axis of rotation to center of vertical hoist line or load block. Boom angle is angle between horizontal and centerline of boom butt and inserts, and is an indication of operating radius. In all cases, operating radius shall govern capacity.

JIB POINT ELEVATION: Jib point elevation is vertical distance from ground level to centerline of jib point shaft.

MACHINE EQUIPMENT: Machine equipped with MAX-ER 2000, 30 Ft. 9 in. crawlers, 48 in. treads, 28 Ft. retractable gantry, 130 Ft. mast, 10 part boom hoist reeving, boom support straps, 169,200 Lb. crane counterweight, two 30,000 Lb. carbody counterweights and wheeled counterweight as specified.

Maximum capacity on 1 in. wire rope is 27,700 Lbs. per line.

WARNING: Check amount of wheeled counterweight on machine before use of this chart. Refer to Counterweight Assembly.

Boom Catwalks Deduct
Deduct 800 Lbs. from capacities when boom catwalks are attached.




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

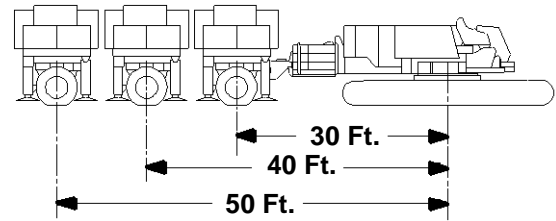

Maximum Boom and Jib Lengths Lifted Unassisted			
Over End of Blocked Crawlers		Over Side or End of Unblocked Crawlers	
Boom Length	Jib Length	Boom Length	Jib Length
240,000 Lb. Wheeled Counterweight at 30 Ft. Position			
360 Ft.	—	340 Ft.	—
340 Ft.	40 Ft.	320 Ft.	(a) 40 Ft.
320 Ft.	100 Ft.	300 Ft.	120 Ft.
300 Ft.	120 Ft.		
240,000 Lb. Wheeled Counterweight at 40 Ft. Position			
400 Ft.	—	380 Ft.	—
380 Ft.	—	360 Ft.	—
360 Ft.	—	340 Ft.	(b) 80 Ft.
340 Ft.	120 Ft.	320 Ft.	120 Ft.
240,000 Lb. Wheeled Counterweight at 50 Ft. Position			
400 Ft.	—	400 Ft.	—
380 Ft.	—	380 Ft.	—
360 Ft.	60 Ft.	360 Ft.	60 Ft.
340 Ft.	120 Ft.	340 Ft.	120 Ft.
462,000 Lb. Wheeled Counterweight at 30 Ft. Position			
400 Ft.	—	400 Ft.	—
380 Ft.	—	380 Ft.	—
360 Ft.	—	360 Ft.	—
340 Ft.	60 Ft.	340 Ft.	60 Ft.
320 Ft.	120 Ft.	320 Ft.	120 Ft.
462,000 Lb. Wheeled Counterweight at 40 Ft. Position			
400 Ft.	—	400 Ft.	—
380 Ft.	—	380 Ft.	—
360 Ft.	100 Ft.	360 Ft.	100 Ft.
340 Ft.	120 Ft.	340 Ft.	120 Ft.
462,000 Lb. Wheeled Counterweight at 50 Ft. Position			
400 Ft.	40 Ft.	400 Ft.	40 Ft.
380 Ft.	120 Ft.	380 Ft.	120 Ft.


Load block, hook and weight ball on ground at start.
 (a) Machine must be equipped with upperworks jacking cylinders when boom catwalks are attached.
 (b) 80 Ft. jib on 340 Ft. boom cannot be raised with 240,000 Lb. wheeled counterweight at 40 Ft. position when boom catwalks are attached.

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

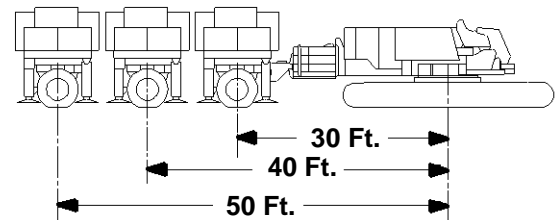

200 Ft. Boom
40 Ft. Jib, 5 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
50	80.2	248.2	100,000 *b	100,000 *b	100,000 *b	100,000 *b	100,000 *b	100,000 *b	50
55	79.0	247.2	98,200 *b	98,200 *b	98,200 *b	98,200 *b	98,200 *b	98,200 *b	55
60	77.8	246.1	94,800 *b	94,800 *b	94,800 *b	94,800 *b	94,800 *b	94,800 *b	60
65	76.6	244.9	91,600 *b	91,600 *b	91,600 *b	91,600 *b	91,600 *b	91,600 *b	65
70	75.3	243.5	88,600 *b	88,600 *b	88,600 *b	88,600 *b	88,600 *b	88,600 *b	70
75	74.1	242.1	85,800 *b	85,800 *b	85,800 *b	85,800 *b	85,800 *b	85,800 *b	75
80	72.9	240.5	83,300 *b	83,300 *b	83,300 *b	83,300 *b	83,300 *b	83,300 *b	80
85	71.6	238.8	80,900 *b	80,900 *b	80,900 *b	80,900 *b	80,900 *b	80,900 *b	85
90	70.4	237.0	78,600 *b	78,600 *b	78,600 *b	78,600 *b	78,600 *b	78,600 *b	90
95	69.1	235.1	76,500 *b	76,500 *b	76,500 *b	76,500 *b	76,500 *b	76,500 *b	95
100	67.8	233.0	74,500 *b	74,500 *b	74,500 *b	74,500 *b	74,500 *b	74,500 *b	100
105	66.5	230.8	72,600 *b	72,600 *b	72,600 *b	72,600 *b	72,600 *b	72,600 *b	105
110	65.2	228.5	70,900 *b	70,900 *b	70,900 *b	70,900 *b	70,900 *b	70,900 *b	110
115	63.9	226.0	69,300 *b	69,300 *b	69,300 *b	69,300 *b	69,300 *b	69,300 *b	115
120	62.6	223.4	67,600 *	67,600 *	67,600 *	67,600 *	67,600 *	67,600 *	120
125	61.2	220.6	66,200 *	66,200 *	66,200 *	66,200 *	66,200 *	66,200 *	125
130	59.8	217.7	64,800 *	64,800 *	64,800 *	64,800 *	64,800 *	64,800 *	130
135	58.5	214.6	63,400 *	63,400 *	63,400 *	63,400 *	63,400 *	63,400 *	135
140	57.0	211.4	62,200 *	62,200 *	62,200 *	62,200 *	62,200 *	62,200 *	140
145	55.6	207.9	61,000 *	61,000 *	61,000 *	61,000 *	61,000 *	61,000 *	145
150	54.1	204.3	59,900 *	59,900 *	59,900 *	59,900 *	59,900 *	59,900 *	150
160	51.1	196.4	57,800 *	57,800 *	57,800 *	57,800 *	57,800 *	57,800 *	160
170	48.0	187.6	55,900 *	55,900 *	55,900 *	55,900 *	55,900 *	55,900 *	170
180	44.7	177.8	54,200 *	54,200 *	54,200 *	54,200 *	54,200 *	54,200 *	180
190	41.1	166.7	52,700 *	52,700 *	52,700 *	52,700 *	52,700 *	52,700 *	190
200	37.3	154.0	51,300 *	51,300 *	51,300 *	51,300 *	51,300 *	51,300 *	200
210	33.1	139.4	49,100	50,200 *	50,200 *	50,200 *	50,200 *	50,200 *	210
220	28.4	122.0	45,100	49,200 *	49,200 *	49,200 *	49,200 *	49,200 *	220
230	22.7	100.2	41,400	48,600 *	48,600 *	48,600 *	48,600 *	48,600 *	230




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

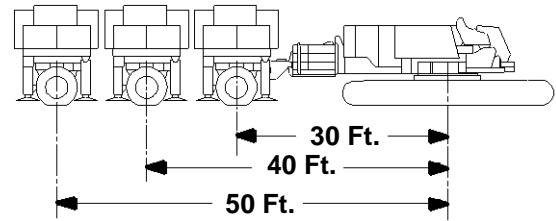

220 Ft. Boom
40 Ft. Jib, 5 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
50	81.0	268.5	100,000 *b	100,000 *b	100,000 *b	100,000 *b	100,000 *b	100,000 *b	50
55	79.8	267.6	99,500 *b	99,500 *b	99,500 *b	99,500 *b	99,500 *b	99,500 *b	55
60	78.7	266.6	97,300 *b	97,300 *b	97,300 *b	97,300 *b	97,300 *b	97,300 *b	60
65	77.6	265.5	94,200 *b	94,200 *b	94,200 *b	94,200 *b	94,200 *b	94,200 *b	65
70	76.5	264.2	91,200 *b	91,200 *b	91,200 *b	91,200 *b	91,200 *b	91,200 *b	70
75	75.4	262.9	88,500 *b	88,500 *b	88,500 *b	88,500 *b	88,500 *b	88,500 *b	75
80	74.2	261.5	86,000 *b	86,000 *b	86,000 *b	86,000 *b	86,000 *b	86,000 *b	80
85	73.1	259.9	83,600 *b	83,600 *b	83,600 *b	83,600 *b	83,600 *b	83,600 *b	85
90	71.9	258.3	81,300 *b	81,300 *b	81,300 *b	81,300 *b	81,300 *b	81,300 *b	90
95	70.8	256.5	79,200 *b	79,200 *b	79,200 *b	79,200 *b	79,200 *b	79,200 *b	95
100	69.6	254.6	77,200 *b	77,200 *b	77,200 *b	77,200 *b	77,200 *b	77,200 *b	100
105	68.4	252.6	75,400 *b	75,400 *b	75,400 *b	75,400 *b	75,400 *b	75,400 *b	105
110	67.2	250.5	73,600 *b	73,600 *b	73,600 *b	73,600 *b	73,600 *b	73,600 *b	110
115	66.0	248.3	71,900 *b	71,900 *b	71,900 *b	71,900 *b	71,900 *b	71,900 *b	115
120	64.8	245.9	70,400 *b	70,400 *b	70,400 *b	70,400 *b	70,400 *b	70,400 *b	120
125	63.6	243.4	68,900 *b	68,900 *b	68,900 *b	68,900 *b	68,900 *b	68,900 *b	125
130	62.4	240.7	67,400 *	67,400 *	67,400 *	67,400 *	67,400 *	67,400 *	130
135	61.1	238.0	66,000 *	66,000 *	66,000 *	66,000 *	66,000 *	66,000 *	135
140	59.9	235.0	64,700 *	64,700 *	64,700 *	64,700 *	64,700 *	64,700 *	140
145	58.6	232.0	63,500 *	63,500 *	63,500 *	63,500 *	63,500 *	63,500 *	145
150	57.3	228.7	62,400 *	62,400 *	62,400 *	62,400 *	62,400 *	62,400 *	150
160	54.6	221.8	60,200 *	60,200 *	60,200 *	60,200 *	60,200 *	60,200 *	160
170	51.9	214.1	58,200 *	58,200 *	58,200 *	58,200 *	58,200 *	58,200 *	170
180	49.0	205.6	56,400 *	56,400 *	56,400 *	56,400 *	56,400 *	56,400 *	180
190	46.0	196.1	54,800 *	54,800 *	54,800 *	54,800 *	54,800 *	54,800 *	190
200	42.8	185.6	51,800	53,300 *	53,300 *	53,300 *	53,300 *	53,300 *	200
210	39.4	173.8	47,300	52,000 *	52,000 *	52,000 *	52,000 *	52,000 *	210
220	35.8	160.5	43,300	50,900 *	50,900 *	50,900 *	50,900 *	50,900 *	220
230	31.8	145.1	39,700	49,900 *	48,400	49,900 *	49,900 *	49,900 *	230
240	27.2	126.8	36,300	49,000 *	44,700	49,000 *	49,000 *	49,000 *	240
250	21.8	104.0	33,200	47,300 *	41,300	48,400 *	48,400 *	48,400 *	250

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

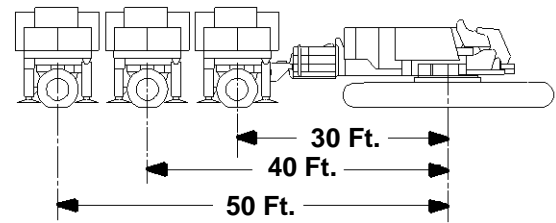

240 Ft. Boom
40 Ft. Jib, 5 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
55	80.6	287.9	100,000 *b	100,000 *b	100,000 *b	100,000 *b	100,000 *b	100,000 *b	55
60	79.5	287.0	98,400 *b	98,400 *b	98,400 *b	98,400 *b	98,400 *b	98,400 *b	60
65	78.5	286.0	96,500 *b	96,500 *b	96,500 *b	96,500 *b	96,500 *b	96,500 *b	65
70	77.5	284.8	93,600 *b	93,600 *b	93,600 *b	93,600 *b	93,600 *b	93,600 *b	70
75	76.4	283.6	90,900 *b	90,900 *b	90,900 *b	90,900 *b	90,900 *b	90,900 *b	75
80	75.4	282.3	88,400 *b	88,400 *b	88,400 *b	88,400 *b	88,400 *b	88,400 *b	80
85	74.3	280.8	86,100 *b	86,100 *b	86,100 *b	86,100 *b	86,100 *b	86,100 *b	85
90	73.3	279.3	83,900 *b	83,900 *b	83,900 *b	83,900 *b	83,900 *b	83,900 *b	90
95	72.2	277.7	81,800 *b	81,800 *b	81,800 *b	81,800 *b	81,800 *b	81,800 *b	95
100	71.1	276.0	79,800 *b	79,800 *b	79,800 *b	79,800 *b	79,800 *b	79,800 *b	100
105	70.0	274.1	77,900 *b	77,900 *b	77,900 *b	77,900 *b	77,900 *b	77,900 *b	105
110	68.9	272.2	76,100 *b	76,100 *b	76,100 *b	76,100 *b	76,100 *b	76,100 *b	110
115	67.8	270.1	74,400 *b	74,400 *b	74,400 *b	74,400 *b	74,400 *b	74,400 *b	115
120	66.7	267.9	72,800 *b	72,800 *b	72,800 *b	72,800 *b	72,800 *b	72,800 *b	120
125	65.6	265.7	71,400 *b	71,400 *b	71,400 *b	71,400 *b	71,400 *b	71,400 *b	125
130	64.5	263.3	69,900 *b	69,900 *b	69,900 *b	69,900 *b	69,900 *b	69,900 *b	130
135	63.4	260.7	68,500 *b	68,500 *b	68,500 *b	68,500 *b	68,500 *b	68,500 *b	135
140	62.2	258.1	67,200 *	67,200 *	67,200 *	67,200 *	67,200 *	67,200 *	140
145	61.0	255.3	65,900 *	65,900 *	65,900 *	65,900 *	65,900 *	65,900 *	145
150	59.9	252.4	64,700 *	64,700 *	64,700 *	64,700 *	64,700 *	64,700 *	150
160	57.5	246.1	62,500 *	62,500 *	62,500 *	62,500 *	62,500 *	62,500 *	160
170	55.0	239.2	60,500 *	60,500 *	60,500 *	60,500 *	60,500 *	60,500 *	170
180	52.5	231.7	58,600 *	58,600 *	58,600 *	58,600 *	58,600 *	58,600 *	180
190	49.8	223.4	54,200 *	56,900 *	56,900 *	56,900 *	56,900 *	56,900 *	190
200	47.1	214.3	49,300 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	200
210	44.2	204.3	44,900 *	54,000 *	54,000 *	54,000 *	54,000 *	54,000 *	210
220	41.2	193.1	40,900 *	52,700 *	50,100 *	52,700 *	52,700 *	52,700 *	220
230	37.9	180.7	37,200 *	51,500 *	46,000 *	51,500 *	51,500 *	51,500 *	230
240	34.4	166.6	33,900 *	50,500 *	42,300 *	50,500 *	50,500 *	50,500 *	240
250	30.6	150.5	30,800 *	47,800 *	38,800 *	49,600 *	47,000 *	49,600 *	250
260	26.2	131.4	28,000 *	42,500 *	35,700 *	48,900 *	43,500 *	48,900 *	260
270	20.9	107.6	25,300 *	37,300 *	32,700 *	48,400 *	40,200 *	48,400 *	270




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

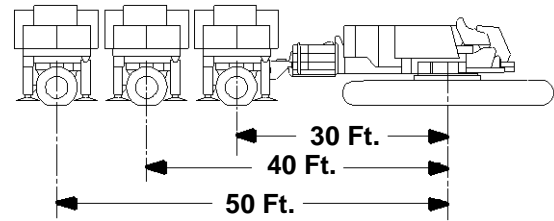

260 Ft. Boom
40 Ft. Jib, 5 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
60	80.2	307.4	98,500 *b	98,500 *b	98,500 *b	98,500 *b	98,500 *b	98,500 *b	60
65	79.3	306.4	97,100 *b	97,100 *b	97,100 *b	97,100 *b	97,100 *b	97,100 *b	65
70	78.3	305.3	95,600 *b	95,600 *b	95,600 *b	95,600 *b	95,600 *b	95,600 *b	70
75	77.3	304.2	93,000 *b	93,000 *b	93,000 *b	93,000 *b	93,000 *b	93,000 *b	75
80	76.4	303.0	90,500 *b	90,500 *b	90,500 *b	90,500 *b	90,500 *b	90,500 *b	80
85	75.4	301.6	88,200 *b	88,200 *b	88,200 *b	88,200 *b	88,200 *b	88,200 *b	85
90	74.4	300.2	86,000 *b	86,000 *b	86,000 *b	86,000 *b	86,000 *b	86,000 *b	90
95	73.4	298.7	84,000 *b	84,000 *b	84,000 *b	84,000 *b	84,000 *b	84,000 *b	95
100	72.4	297.1	82,000 *b	82,000 *b	82,000 *b	82,000 *b	82,000 *b	82,000 *b	100
105	71.4	295.4	80,200 *b	80,200 *b	80,200 *b	80,200 *b	80,200 *b	80,200 *b	105
110	70.4	293.6	78,400 *b	78,400 *b	78,400 *b	78,400 *b	78,400 *b	78,400 *b	110
115	69.4	291.7	76,800 *b	76,800 *b	76,800 *b	76,800 *b	76,800 *b	76,800 *b	115
120	68.4	289.7	75,200 *b	75,200 *b	75,200 *b	75,200 *b	75,200 *b	75,200 *b	120
125	67.3	287.6	73,700 *b	73,700 *b	73,700 *b	73,700 *b	73,700 *b	73,700 *b	125
130	66.3	285.4	72,200 *b	72,200 *b	72,200 *b	72,200 *b	72,200 *b	72,200 *b	130
135	65.3	283.1	70,800 *b	70,800 *b	70,800 *b	70,800 *b	70,800 *b	70,800 *b	135
140	64.2	280.6	69,500 *b	69,500 *b	69,500 *b	69,500 *b	69,500 *b	69,500 *b	140
145	63.1	278.1	68,200 *b	68,200 *b	68,200 *b	68,200 *b	68,200 *b	68,200 *b	145
150	62.1	275.4	67,000 *	67,000 *	67,000 *	67,000 *	67,000 *	67,000 *	150
160	59.9	269.7	64,700 *	64,700 *	64,700 *	64,700 *	64,700 *	64,700 *	160
170	57.6	263.4	62,600 *	62,600 *	62,600 *	62,600 *	62,600 *	62,600 *	170
180	55.4	256.7	59,200	60,800 *	60,800 *	60,800 *	60,800 *	60,800 *	180
190	53.0	249.2	53,700	59,000 *	59,000 *	59,000 *	59,000 *	59,000 *	190
200	50.6	241.2	48,800	57,400 *	57,400 *	57,400 *	57,400 *	57,400 *	200
210	48.0	232.3	44,400	55,900 *	54,000	55,900 *	55,900 *	55,900 *	210
220	45.4	222.7	40,400	54,500 *	49,600	54,500 *	54,500 *	54,500 *	220
230	42.6	212.1	36,700	53,300 *	45,500	53,300 *	53,300 *	53,300 *	230
240	39.7	200.4	33,400	52,100 *	41,800	52,100 *	50,300	52,100 *	240
250	36.6	187.3	30,300	50,000 *	38,400	51,100 *	46,500	51,100 *	250
260	33.2	172.6	27,500	42,600 *	35,200	42,600 *	42,600 *	42,600 *	260
270	29.5	155.7	24,900	32,900 *	32,300	32,900 *	32,900 *	32,900 *	270
280	25.3	135.8	22,400	24,100 *	24,100 *	24,100 *	24,100 *	24,100 *	280
290	20.2	111.1	16,100 *	16,100 *	16,100 *	16,100 *	16,100 *	16,100 *	290

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

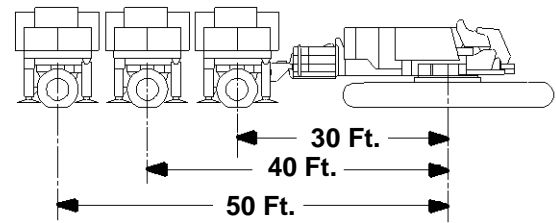

280 Ft. Boom
40 Ft. Jib, 5 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
65	80.2	326.7	95,000 *b	95,000 *b	95,000 *b	95,000 *b	95,000 *b	95,000 *b	65
70	79.3	325.7	93,400 *b	93,400 *b	93,400 *b	93,400 *b	93,400 *b	93,400 *b	70
75	78.4	324.6	91,100 *b	91,100 *b	91,100 *b	91,100 *b	91,100 *b	91,100 *b	75
80	77.5	323.5	88,900 *b	88,900 *b	88,900 *b	88,900 *b	88,900 *b	88,900 *b	80
85	76.5	322.2	86,900 *b	86,900 *b	86,900 *b	86,900 *b	86,900 *b	86,900 *b	85
90	75.6	320.9	84,900 *b	84,900 *b	84,900 *b	84,900 *b	84,900 *b	84,900 *b	90
95	74.7	319.5	83,000 *b	83,000 *b	83,000 *b	83,000 *b	83,000 *b	83,000 *b	95
100	73.8	318.0	81,300 *b	81,300 *b	81,300 *b	81,300 *b	81,300 *b	81,300 *b	100
105	72.8	316.4	79,600 *b	79,600 *b	79,600 *b	79,600 *b	79,600 *b	79,600 *b	105
110	71.9	314.7	78,000 *b	78,000 *b	78,000 *b	78,000 *b	78,000 *b	78,000 *b	110
115	71.0	313.0	76,500 *b	76,500 *b	76,500 *b	76,500 *b	76,500 *b	76,500 *b	115
120	70.0	311.1	75,000 *b	75,000 *b	75,000 *b	75,000 *b	75,000 *b	75,000 *b	120
125	69.1	309.2	73,600 *b	73,600 *b	73,600 *b	73,600 *b	73,600 *b	73,600 *b	125
130	68.1	307.1	72,300 *b	72,300 *b	72,300 *b	72,300 *b	72,300 *b	72,300 *b	130
135	67.1	305.0	71,000 *b	71,000 *b	71,000 *b	71,000 *b	71,000 *b	71,000 *b	135
140	66.1	302.7	69,700 *b	69,700 *b	69,700 *b	69,700 *b	69,700 *b	69,700 *b	140
145	65.2	300.3	68,600 *b	68,600 *b	68,600 *b	68,600 *b	68,600 *b	68,600 *b	145
150	64.2	297.9	67,400 *b	67,400 *b	67,400 *b	67,400 *b	67,400 *b	67,400 *b	150
160	62.2	292.6	65,300 *	65,300 *	65,300 *	65,300 *	65,300 *	65,300 *	160
170	60.1	286.9	63,300 *	63,300 *	63,300 *	63,300 *	63,300 *	63,300 *	170
180	58.0	280.7	59,400	61,500 *	61,500 *	61,500 *	61,500 *	61,500 *	180
190	55.9	274.0	53,900	59,900 *	59,900 *	59,900 *	59,900 *	59,900 *	190
200	53.7	266.7	49,000	58,300 *	58,300 *	58,300 *	58,300 *	58,300 *	200
210	51.4	258.8	44,600	56,900 *	54,200	56,900 *	56,900 *	56,900 *	210
220	49.1	250.2	40,500	55,500 *	49,700	55,500 *	55,500 *	55,500 *	220
230	46.6	240.8	36,900	54,300 *	45,700	54,300 *	54,300 *	54,300 *	230
240	44.1	230.6	33,500	53,100 *	41,900	53,100 *	50,400	53,100 *	240
250	41.4	219.5	30,500	52,100 *	38,500	52,100 *	46,600	52,100 *	250
260	38.6	207.2	27,600	47,600 *	35,300	51,200 *	43,100	51,200 *	260
270	35.6	193.5	25,000	42,700 *	32,400	50,400 *	39,900	50,400 *	270
280	32.3	178.1	22,500	38,200 *	29,700	49,600 *	36,900	49,600 *	280
290	28.7	160.6	20,200	33,900 *	27,100	49,000 *	34,100	49,000 *	290
300	24.6	139.9	18,100	29,700 *	24,700	44,600 *	31,400	48,600 *	300




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

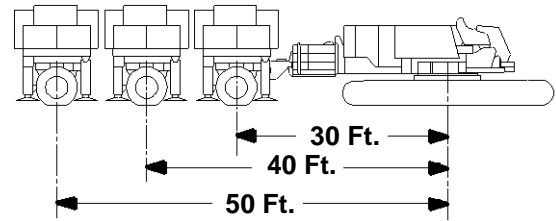

300 Ft. Boom
40 Ft. Jib, 5 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
65	80.8	347.0	94,700 *b	94,700 *b	94,700 *b	94,700 *b	94,700 *b	94,700 *b	65
70	79.9	346.1	93,600 *b	93,600 *b	93,600 *b	93,600 *b	93,600 *b	93,600 *b	70
75	79.1	345.1	92,500 *b	92,500 *b	92,500 *b	92,500 *b	92,500 *b	92,500 *b	75
80	78.2	344.0	90,400 *b	90,400 *b	90,400 *b	90,400 *b	90,400 *b	90,400 *b	80
85	77.3	342.8	88,400 *b	88,400 *b	88,400 *b	88,400 *b	88,400 *b	88,400 *b	85
90	76.5	341.6	86,500 *b	86,500 *b	86,500 *b	86,500 *b	86,500 *b	86,500 *b	90
95	75.6	340.3	84,700 *b	84,700 *b	84,700 *b	84,700 *b	84,700 *b	84,700 *b	95
100	74.7	338.9	83,000 *b	83,000 *b	83,000 *b	83,000 *b	83,000 *b	83,000 *b	100
105	73.9	337.4	81,300 *b	81,300 *b	81,300 *b	81,300 *b	81,300 *b	81,300 *b	105
110	73.0	335.8	79,800 *b	79,800 *b	79,800 *b	79,800 *b	79,800 *b	79,800 *b	110
115	72.1	334.2	78,200 *b	78,200 *b	78,200 *b	78,200 *b	78,200 *b	78,200 *b	115
120	71.2	332.4	76,800 *b	76,800 *b	76,800 *b	76,800 *b	76,800 *b	76,800 *b	120
125	70.3	330.6	75,400 *b	75,400 *b	75,400 *b	75,400 *b	75,400 *b	75,400 *b	125
130	69.4	328.7	74,100 *b	74,100 *b	74,100 *b	74,100 *b	74,100 *b	74,100 *b	130
135	68.5	326.7	72,800 *b	72,800 *b	72,800 *b	72,800 *b	72,800 *b	72,800 *b	135
140	67.6	324.6	71,600 *b	71,600 *b	71,600 *b	71,600 *b	71,600 *b	71,600 *b	140
145	66.7	322.4	70,400 *b	70,400 *b	70,400 *b	70,400 *b	70,400 *b	70,400 *b	145
150	65.8	320.1	69,300 *b	69,300 *b	69,300 *b	69,300 *b	69,300 *b	69,300 *b	150
160	63.9	315.2	67,100 *b	67,100 *b	67,100 *b	67,100 *b	67,100 *b	67,100 *b	160
170	62.0	309.9	64,900	65,200 *	65,200 *	65,200 *	65,200 *	65,200 *	170
180	60.1	304.2	58,700	63,300 *	63,300 *	63,300 *	63,300 *	63,300 *	180
190	58.1	298.0	53,200	61,600 *	61,600 *	61,600 *	61,600 *	61,600 *	190
200	56.1	291.4	48,300	60,000 *	58,500	60,000 *	60,000 *	60,000 *	200
210	54.1	284.2	43,900	58,600 *	53,500	58,600 *	58,600 *	58,600 *	210
220	51.9	276.4	39,900	57,200 *	49,000	57,200 *	57,200 *	57,200 *	220
230	49.8	268.0	36,200	55,900 *	45,000	55,900 *	53,800	55,900 *	230
240	47.5	258.9	32,900	54,700 *	41,200	54,700 *	49,700	54,700 *	240
250	45.1	249.1	29,800	52,700 *	37,800	53,600 *	45,900	53,600 *	250
260	42.7	238.4	26,900	48,800 *	34,700	52,600 *	42,400	52,600 *	260
270	40.1	226.7	24,300	44,000 *	31,700	51,700 *	39,200	51,700 *	270
280	37.4	213.9	21,900	39,500 *	29,000	50,900 *	36,200	50,900 *	280
290	34.5	199.6	19,600	35,300 *	26,500	50,100 *	33,400	50,100 *	290
300	31.3	183.7	17,500	31,300 *	24,100	46,600 *	30,800	49,500 *	300
310	27.8	165.4	15,500	27,400 *	21,900	42,100 *	28,400	48,900 *	310
320	23.9	144.0	13,500 *	23,700 *	19,800	37,700 *	26,000	48,500 *	320

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

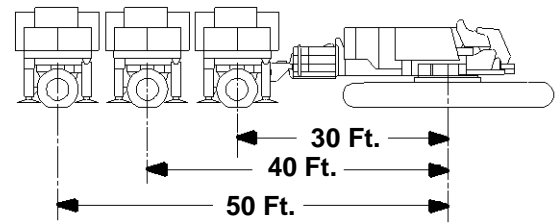

320 Ft. Boom
40 Ft. Jib, 5 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
70	80.5	366.4	83,100 *b	83,100 *b	83,100 *b	83,100 *b	83,100 *b	83,100 *b	70
75	79.7	365.5	83,100 *b	83,100 *b	83,100 *b	83,100 *b	83,100 *b	83,100 *b	75
80	78.9	364.5	83,100 *b	83,100 *b	83,100 *b	83,100 *b	83,100 *b	83,100 *b	80
85	78.1	363.4	83,100 *b	83,100 *b	83,100 *b	83,100 *b	83,100 *b	83,100 *b	85
90	77.2	362.2	83,100 *b	83,100 *b	83,100 *b	83,100 *b	83,100 *b	83,100 *b	90
95	76.4	361.0	83,100 *b	83,100 *b	83,100 *b	83,100 *b	83,100 *b	83,100 *b	95
100	75.6	359.6	83,100 *b	83,100 *b	83,100 *b	83,100 *b	83,100 *b	83,100 *b	100
105	74.8	358.2	82,500 *b	82,500 *b	82,500 *b	82,500 *b	82,500 *b	82,500 *b	105
110	74.0	356.8	81,000 *b	81,000 *b	81,000 *b	81,000 *b	81,000 *b	81,000 *b	110
115	73.1	355.2	79,500 *b	79,500 *b	79,500 *b	79,500 *b	79,500 *b	79,500 *b	115
120	72.3	353.6	78,100 *b	78,100 *b	78,100 *b	78,100 *b	78,100 *b	78,100 *b	120
125	71.5	351.9	76,700 *b	76,700 *b	76,700 *b	76,700 *b	76,700 *b	76,700 *b	125
130	70.6	350.1	75,400 *b	75,400 *b	75,400 *b	75,400 *b	75,400 *b	75,400 *b	130
135	69.8	348.2	74,100 *b	74,100 *b	74,100 *b	74,100 *b	74,100 *b	74,100 *b	135
140	68.9	346.2	72,900 *b	72,900 *b	72,900 *b	72,900 *b	72,900 *b	72,900 *b	140
145	68.1	344.2	71,800 *b	71,800 *b	71,800 *b	71,800 *b	71,800 *b	71,800 *b	145
150	67.2	342.0	70,600 *b	70,600 *b	70,600 *b	70,600 *b	70,600 *b	70,600 *b	150
160	65.5	337.5	68,500 *b	68,500 *b	68,500 *b	68,500 *b	68,500 *b	68,500 *b	160
170	63.7	332.6	61,400 b	66,500 *b	66,500 *b	66,500 *b	66,500 *b	66,500 *b	170
180	61.9	327.3	55,200	64,700 *	64,700 *	64,700 *	64,700 *	64,700 *	180
190	60.1	321.5	49,700	63,000 *	60,500	63,000 *	63,000 *	63,000 *	190
200	58.2	315.4	44,800	61,400 *	55,000	61,400 *	61,400 *	61,400 *	200
210	56.3	308.8	40,400	59,900 *	50,000	59,900 *	59,800	59,900 *	210
220	54.4	301.7	36,300	58,500 *	45,500	58,500 *	54,800	58,500 *	220
230	52.4	294.0	32,700	57,100 *	41,400	57,200 *	50,300	57,200 *	230
240	50.4	285.8	29,300	52,900 *	37,700	56,000 *	46,200	56,000 *	240
250	48.2	277.0	26,200	49,000 *	34,300	54,800 *	42,400	54,800 *	250
260	46.1	267.4	23,400	45,500 *	31,100	53,800 *	38,900	53,800 *	260
270	43.8	257.1	20,800	41,100 *	28,200	52,800 *	35,700	52,800 *	270
280	41.4	245.9	18,300	36,600 *	25,500	51,700 *	32,700	51,900 *	280
290	38.9	233.7	16,000 *	32,400 *	22,900	48,300 *	29,900	51,000 *	290
300	36.3	220.4	13,500 *	28,400 *	20,600	44,100 *	27,300	50,300 *	300
310	33.5	205.6	11,000 *	24,700 *	18,400	39,700 *	24,800	49,500 *	310
320	30.4	189.0	8,700 *	21,100 *	16,300	35,500 *	22,500	49,000 *	320
330	27.0	170.2	6,600 *	17,700 *	14,300	31,500 *	20,400	44,500 *	330
340	23.2	148.0	4,500 *	14,300 *	12,000 *	27,500 *	18,300	39,600 *	340




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

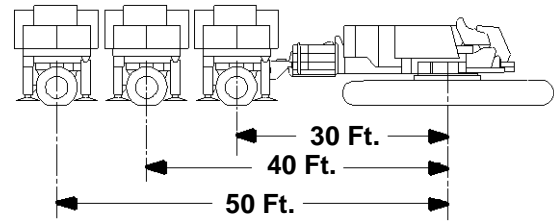

340 Ft. Boom
40 Ft. Jib, 5 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
70	81.0	386.7	83,100 *b	83,100 *b	83,100 *b	83,100 *b	83,100 *b	83,100 *b	70
75	80.2	385.8	83,100 *b	83,100 *b	83,100 *b	83,100 *b	83,100 *b	83,100 *b	75
80	79.5	384.9	83,100 *b	83,100 *b	83,100 *b	83,100 *b	83,100 *b	83,100 *b	80
85	78.7	383.8	83,100 *b	83,100 *b	83,100 *b	83,100 *b	83,100 *b	83,100 *b	85
90	77.9	382.7	83,100 *b	83,100 *b	83,100 *b	83,100 *b	83,100 *b	83,100 *b	90
95	77.2	381.6	83,100 *b	83,100 *b	83,100 *b	83,100 *b	83,100 *b	83,100 *b	95
100	76.4	380.3	83,100 *b	83,100 *b	83,100 *b	83,100 *b	83,100 *b	83,100 *b	100
105	75.6	379.0	83,100 *b	83,100 *b	83,100 *b	83,100 *b	83,100 *b	83,100 *b	105
110	74.8	377.6	82,400 *b	82,400 *b	82,400 *b	82,400 *b	82,400 *b	82,400 *b	110
115	74.0	376.2	81,000 *b	81,000 *b	81,000 *b	81,000 *b	81,000 *b	81,000 *b	115
120	73.3	374.6	79,600 *b	79,600 *b	79,600 *b	79,600 *b	79,600 *b	79,600 *b	120
125	72.5	373.0	78,200 *b	78,200 *b	78,200 *b	78,200 *b	78,200 *b	78,200 *b	125
130	71.7	371.3	77,000 *b	77,000 *b	77,000 *b	77,000 *b	77,000 *b	77,000 *b	130
135	70.9	369.5	75,700 *b	75,700 *b	75,700 *b	75,700 *b	75,700 *b	75,700 *b	135
140	70.1	367.7	74,500 *b	74,500 *b	74,500 *b	74,500 *b	74,500 *b	74,500 *b	140
145	69.3	365.8	73,400 *b	73,400 *b	73,400 *b	73,400 *b	73,400 *b	73,400 *b	145
150	68.5	363.8	72,300 *b	72,300 *b	72,300 *b	72,300 *b	72,300 *b	72,300 *b	150
160	66.8	359.5	67,800 b	70,100 *b	70,100 *b	70,100 *b	70,100 *b	70,100 *b	160
170	65.2	354.9	60,800 b	68,200 *b	68,200 *b	68,200 *b	68,200 *b	68,200 *b	170
180	63.5	349.9	54,600 b	66,300 *b	65,900 b	66,300 *b	66,300 *b	66,300 *b	180
190	61.8	344.6	49,100	64,500 *	59,800	64,500 *	64,500 *	64,500 *	190
200	60.1	338.9	44,100	62,900 *	54,300	62,900 *	62,900 *	62,900 *	200
210	58.3	332.7	39,700	61,300 *	49,300	61,300 *	59,100	61,300 *	210
220	56.5	326.2	35,700	59,900 *	44,800	59,900 *	54,100	59,900 *	220
230	54.7	319.1	32,000	56,200 *	40,800	58,600 *	49,600	58,600 *	230
240	52.8	311.6	28,600	52,100 *	37,000	57,300 *	45,500	57,300 *	240
250	50.9	303.5	25,600	48,200 *	33,600	56,100 *	41,700	56,100 *	250
260	48.9	294.9	22,700	44,700 *	30,400	55,000 *	38,200	55,000 *	260
270	46.9	285.6	20,100	41,400 *	27,500	54,000 *	35,000	54,000 *	270
280	44.8	275.6	17,700 *	37,400 *	24,800	50,900 *	32,000	53,000 *	280
290	42.6	264.9	15,000 *	33,200 *	22,300	47,600 *	29,200	52,100 *	290
300	40.3	253.2	12,500 *	29,300 *	19,900	44,500 *	26,600	51,300 *	300
310	37.8	240.5	10,100 *	25,500 *	17,700	40,900 *	24,200	50,600 *	310
320	35.3	226.7	7,800 *	22,000 *	15,600	36,700 *	21,900	48,600 *	320
330	32.5	211.4	5,700 *	18,700 *	13,400 *	32,800 *	19,700	43,900 *	330
340	29.6	194.2		15,400 *	11,100 *	29,000 *	17,700	39,400 *	340
350	26.3	174.7		12,300 *	9,000 *	25,400 *	15,800	35,100 *	350
360	22.5	151.9		9,300 *	6,900 *	21,800 *	13,900	30,300 *	360

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

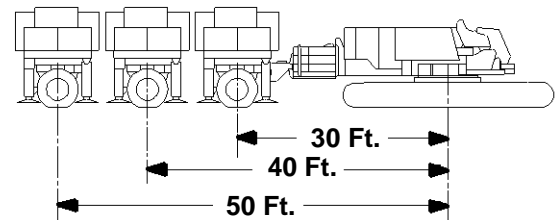

360 Ft. Boom 40 Ft. Jib, 5 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	40 Ft. Position	50 Ft. Position		Jib Oper. Rad. Feet
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
75	80.7	406.2	83,100 *b	83,100 *b	83,100 *b	75
80	80.0	405.3	83,100 *b	83,100 *b	83,100 *b	80
85	79.3	404.3	83,100 *b	83,100 *b	83,100 *b	85
90	78.5	403.2	83,100 *b	83,100 *b	83,100 *b	90
95	77.8	402.1	83,100 *b	83,100 *b	83,100 *b	95
100	77.1	400.9	83,100 *b	83,100 *b	83,100 *b	100
105	76.3	399.7	83,100 *b	83,100 *b	83,100 *b	105
110	75.6	398.4	83,100 *b	83,100 *b	83,100 *b	110
115	74.9	397.0	82,200 *b	82,200 *b	82,200 *b	115
120	74.1	395.5	80,900 *b	80,900 *b	80,900 *b	120
125	73.4	394.0	79,600 *b	79,600 *b	79,600 *b	125
130	72.6	392.4	78,300 *b	78,300 *b	78,300 *b	130
135	71.9	390.7	77,100 *b	77,100 *b	77,100 *b	135
140	71.1	389.0	75,900 *b	75,900 *b	75,900 *b	140
145	70.4	387.2	74,800 *b	74,800 *b	74,800 *b	145
150	69.6	385.3	73,600 *b	73,600 *b	73,600 *b	150
160	68.1	381.3	71,500 *b	71,500 *b	71,500 *b	160
170	66.5	376.9	69,400 *b	69,400 *b	69,400 *b	170
180	64.9	372.3	67,600 *b	67,600 *b	67,600 *b	180
190	63.3	367.3	65,800 *b	65,800 *b	65,800 *b	190
200	61.7	361.9	64,100 *	64,100 *	64,100 *	200
210	60.1	356.2	62,600 *	58,900	62,600 *	210
220	58.4	350.1	61,200 *	53,900	61,200 *	220
230	56.7	343.5	59,900 *	49,400	59,900 *	230
240	55.0	336.6	58,600 *	45,300	58,600 *	240
250	53.2	329.1	57,400 *	41,500	57,400 *	250
260	51.4	321.2	56,200 *	38,000	56,200 *	260
270	49.5	312.7	54,100 *	34,800	55,200 *	270
280	47.6	303.7	50,600 *	31,800	54,200 *	280
290	45.6	294.0	47,300 *	29,000	53,200 *	290
300	43.6	283.6	44,200 *	26,400	52,400 *	300
310	41.4	272.4	41,300 *	24,000	51,600 *	310
320	39.2	260.3	38,400 *	21,700	48,800 *	320
330	36.8	247.2	34,400 *	19,600	44,200 *	330
340	34.3	232.8	30,700 *	17,600	39,500 *	340
350	31.7	217.0	27,200 *	15,700	34,800 *	350
360	28.8	199.3	23,800 *	13,800 *	30,400 *	360
370	25.6	179.2	20,500 *	11,700 *	26,100 *	370
380	21.9	155.7	17,200 *	9,700 *	21,900 *	380




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
Boom No. 79-44 with 130 Ft. Mast No. 44
169,200 Lb. Crane Counterweight
60,000 Lb. Carbody Counterweight
240,000 Lb. and 462,000 Lb. Wheeled Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

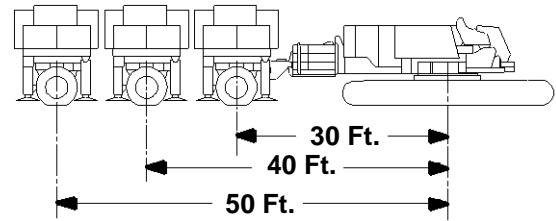

380 Ft. Boom 40 Ft. Jib, 5 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	50 Ft. Position
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds
80	80.5	425.6	83,100 *b
85	79.8	424.7	83,100 *b
90	79.1	423.7	83,100 *b
95	78.4	422.6	83,100 *b
100	77.7	421.5	83,100 *b
105	77.0	420.3	83,100 *b
110	76.3	419.0	83,100 *b
115	75.6	417.7	83,100 *b
120	74.9	416.4	82,100 *b
125	74.2	414.9	80,800 *b
130	73.5	413.4	79,500 *b
135	72.8	411.8	78,200 *b
140	72.1	410.2	77,000 *b
145	71.3	408.4	75,900 *b
150	70.6	406.6	74,700 *b
160	69.2	402.8	72,600 *b
170	67.7	398.8	70,600 *b
180	66.2	394.4	68,700 *b
190	64.7	389.7	67,000 *b
200	63.2	384.6	65,300 *b
210	61.6	379.2	63,800 *
220	60.1	373.5	62,300 *
230	58.5	367.4	61,000 *
240	56.9	360.9	59,700 *
250	55.2	354.0	58,500 *
260	53.5	346.7	57,400 *
270	51.8	338.8	56,200 *
280	50.1	330.5	55,200 *
290	48.2	321.7	54,300 *
300	46.4	312.2	53,400 *
310	44.4	302.1	51,900 *
320	42.4	291.3	48,300 *
330	40.4	279.7	43,300 *
340	38.2	267.2	38,500 *
350	35.9	253.6	34,100 *
360	33.5	238.8	29,800 *
370	30.9	222.4	25,700 *
380	28.1	204.2	21,800 *
390	24.9	183.6	18,100 *
400	21.4	159.4	14,400 *

400 Ft. Boom 40 Ft. Jib, 5 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	50 Ft. Position
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds
80	80.9	445.9	83,100 *b
85	80.2	445.0	83,100 *b
90	79.6	444.1	83,100 *b
95	78.9	443.1	83,100 *b
100	78.3	442.0	83,100 *b
105	77.6	440.9	83,100 *b
110	76.9	439.7	81,300 *b
115	76.3	438.4	81,300 *b
120	75.6	437.1	81,300 *b
125	74.9	435.7	80,800 *b
130	74.2	434.3	80,100 *b
135	73.6	432.8	79,000 *b
140	72.9	431.2	77,800 *b
145	72.2	429.6	76,700 *b
150	71.5	427.9	75,600 *b
160	70.1	424.3	73,400 *b
170	68.8	420.4	71,500 *b
180	67.4	416.2	69,700 *b
190	65.9	411.8	68,000 *b
200	64.5	407.0	66,300 *b
210	63.0	402.0	64,800 *b
220	61.6	396.6	63,300 *
230	60.1	390.8	62,000 *
240	58.6	384.7	60,700 *
250	57.0	378.3	59,500 *
260	55.5	371.4	58,300 *
270	53.8	364.2	57,200 *
280	52.2	356.5	56,100 *
290	50.5	348.3	55,200 *
300	48.8	339.6	54,300 *
310	47.1	330.4	51,500 *
320	45.2	320.5	48,400 *
330	43.4	310.1	43,400 *
340	41.4	298.8	38,700 *
350	39.4	286.8	34,300 *
360	37.3	273.9	30,100 *
370	35.0	259.9	26,100 *
380	32.7	244.6	22,300 *
390	30.1	227.8	18,700 *
400	27.4	209.0	15,200 *
410	24.3	187.8	11,900 *
420	20.9	163.0	8,600 *

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

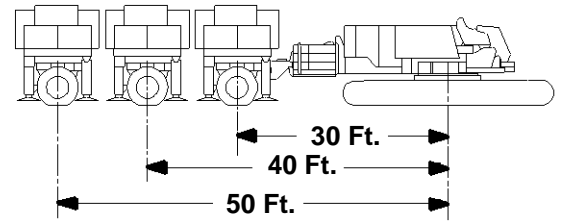

200 Ft. Boom
40 Ft. Jib, 15 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
55	80.9	246.1	75,700 *b	75,700 *b	75,700 *b	75,700 *b	75,700 *b	75,700 *b	55
60	79.7	245.0	73,900 *b	73,900 *b	73,900 *b	73,900 *b	73,900 *b	73,900 *b	60
65	78.4	243.8	72,100 *b	72,100 *b	72,100 *b	72,100 *b	72,100 *b	72,100 *b	65
70	77.2	242.4	70,500 *b	70,500 *b	70,500 *b	70,500 *b	70,500 *b	70,500 *b	70
75	76.0	241.0	68,900 *b	68,900 *b	68,900 *b	68,900 *b	68,900 *b	68,900 *b	75
80	74.7	239.4	67,500 *b	67,500 *b	67,500 *b	67,500 *b	67,500 *b	67,500 *b	80
85	73.5	237.7	66,100 *	66,100 *	66,100 *	66,100 *	66,100 *	66,100 *	85
90	72.2	235.9	64,800 *	64,800 *	64,800 *	64,800 *	64,800 *	64,800 *	90
95	70.9	233.9	63,600 *	63,600 *	63,600 *	63,600 *	63,600 *	63,600 *	95
100	69.6	231.9	62,400 *	62,400 *	62,400 *	62,400 *	62,400 *	62,400 *	100
105	68.3	229.7	61,300 *	61,300 *	61,300 *	61,300 *	61,300 *	61,300 *	105
110	67.0	227.3	60,200 *	60,200 *	60,200 *	60,200 *	60,200 *	60,200 *	110
115	65.7	224.8	59,200 *	59,200 *	59,200 *	59,200 *	59,200 *	59,200 *	115
120	64.4	222.2	58,300 *	58,300 *	58,300 *	58,300 *	58,300 *	58,300 *	120
125	63.0	219.4	57,400 *	57,400 *	57,400 *	57,400 *	57,400 *	57,400 *	125
130	61.6	216.5	56,500 *	56,500 *	56,500 *	56,500 *	56,500 *	56,500 *	130
135	60.2	213.4	55,200 *	55,200 *	55,200 *	55,200 *	55,200 *	55,200 *	135
140	58.8	210.1	53,800 *	53,800 *	53,800 *	53,800 *	53,800 *	53,800 *	140
145	57.4	206.6	52,500 *	52,500 *	52,500 *	52,500 *	52,500 *	52,500 *	145
150	55.9	203.0	51,200 *	51,200 *	51,200 *	51,200 *	51,200 *	51,200 *	150
160	52.9	195.0	48,900 *	48,900 *	48,900 *	48,900 *	48,900 *	48,900 *	160
170	49.7	186.2	46,800 *	46,800 *	46,800 *	46,800 *	46,800 *	46,800 *	170
180	46.3	176.2	44,900 *	44,900 *	44,900 *	44,900 *	44,900 *	44,900 *	180
190	42.8	165.0	43,300 *	43,300 *	43,300 *	43,300 *	43,300 *	43,300 *	190
200	38.9	152.2	41,700 *	41,700 *	41,700 *	41,700 *	41,700 *	41,700 *	200
210	34.7	137.4	40,400 *	40,400 *	40,400 *	40,400 *	40,400 *	40,400 *	210




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

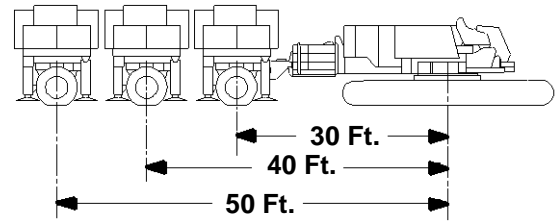

220 Ft. Boom

40 Ft. Jib, 15 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
60	80.5	265.5	75,000 *b	75,000 *b	75,000 *b	75,000 *b	75,000 *b	75,000 *b	60
65	79.3	264.3	73,300 *b	73,300 *b	73,300 *b	73,300 *b	73,300 *b	73,300 *b	65
70	78.2	263.1	71,700 *b	71,700 *b	71,700 *b	71,700 *b	71,700 *b	71,700 *b	70
75	77.1	261.8	70,200 *b	70,200 *b	70,200 *b	70,200 *b	70,200 *b	70,200 *b	75
80	75.9	260.3	68,800 *b	68,800 *b	68,800 *b	68,800 *b	68,800 *b	68,800 *b	80
85	74.8	258.8	67,500 *b	67,500 *b	67,500 *b	67,500 *b	67,500 *b	67,500 *b	85
90	73.6	257.1	66,200 *	66,200 *	66,200 *	66,200 *	66,200 *	66,200 *	90
95	72.5	255.3	65,000 *	65,000 *	65,000 *	65,000 *	65,000 *	65,000 *	95
100	71.3	253.5	63,900 *	63,900 *	63,900 *	63,900 *	63,900 *	63,900 *	100
105	70.1	251.4	62,800 *	62,800 *	62,800 *	62,800 *	62,800 *	62,800 *	105
110	68.9	249.3	61,700 *	61,700 *	61,700 *	61,700 *	61,700 *	61,700 *	110
115	67.7	247.1	60,700 *	60,700 *	60,700 *	60,700 *	60,700 *	60,700 *	115
120	66.5	244.7	59,800 *	59,800 *	59,800 *	59,800 *	59,800 *	59,800 *	120
125	65.3	242.2	58,900 *	58,900 *	58,900 *	58,900 *	58,900 *	58,900 *	125
130	64.0	239.5	58,000 *	58,000 *	58,000 *	58,000 *	58,000 *	58,000 *	130
135	62.8	236.7	57,200 *	57,200 *	57,200 *	57,200 *	57,200 *	57,200 *	135
140	61.5	233.8	56,400 *	56,400 *	56,400 *	56,400 *	56,400 *	56,400 *	140
145	60.2	230.7	55,200 *	55,200 *	55,200 *	55,200 *	55,200 *	55,200 *	145
150	58.9	227.4	53,900 *	53,900 *	53,900 *	53,900 *	53,900 *	53,900 *	150
160	56.2	220.4	51,500 *	51,500 *	51,500 *	51,500 *	51,500 *	51,500 *	160
170	53.4	212.7	49,300 *	49,300 *	49,300 *	49,300 *	49,300 *	49,300 *	170
180	50.6	204.1	47,400 *	47,400 *	47,400 *	47,400 *	47,400 *	47,400 *	180
190	47.5	194.6	45,600 *	45,600 *	45,600 *	45,600 *	45,600 *	45,600 *	190
200	44.3	184.0	44,000 *	44,000 *	44,000 *	44,000 *	44,000 *	44,000 *	200
210	40.9	172.1	42,500 *	42,500 *	42,500 *	42,500 *	42,500 *	42,500 *	210
220	37.2	158.6	41,200 *	41,200 *	41,200 *	41,200 *	41,200 *	41,200 *	220
230	33.2	142.9	40,000 *	40,000 *	40,000 *	40,000 *	40,000 *	40,000 *	230

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

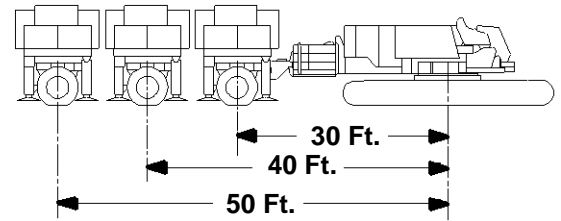

240 Ft. Boom
40 Ft. Jib, 15 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
65	80.1	284.8	74,400 *b	74,400 *b	74,400 *b	74,400 *b	74,400 *b	74,400 *b	65
70	79.1	283.7	72,900 *b	72,900 *b	72,900 *b	72,900 *b	72,900 *b	72,900 *b	70
75	78.0	282.5	71,400 *b	71,400 *b	71,400 *b	71,400 *b	71,400 *b	71,400 *b	75
80	77.0	281.1	70,000 *b	70,000 *b	70,000 *b	70,000 *b	70,000 *b	70,000 *b	80
85	75.9	279.7	68,700 *b	68,700 *b	68,700 *b	68,700 *b	68,700 *b	68,700 *b	85
90	74.8	278.2	67,500 *b	67,500 *b	67,500 *b	67,500 *b	67,500 *b	67,500 *b	90
95	73.8	276.5	66,300 *	66,300 *	66,300 *	66,300 *	66,300 *	66,300 *	95
100	72.7	274.8	65,200 *	65,200 *	65,200 *	65,200 *	65,200 *	65,200 *	100
105	71.6	272.9	64,100 *	64,100 *	64,100 *	64,100 *	64,100 *	64,100 *	105
110	70.5	271.0	63,100 *	63,100 *	63,100 *	63,100 *	63,100 *	63,100 *	110
115	69.4	268.9	62,100 *	62,100 *	62,100 *	62,100 *	62,100 *	62,100 *	115
120	68.3	266.7	61,200 *	61,200 *	61,200 *	61,200 *	61,200 *	61,200 *	120
125	67.2	264.4	60,300 *	60,300 *	60,300 *	60,300 *	60,300 *	60,300 *	125
130	66.0	262.0	59,400 *	59,400 *	59,400 *	59,400 *	59,400 *	59,400 *	130
135	64.9	259.5	58,600 *	58,600 *	58,600 *	58,600 *	58,600 *	58,600 *	135
140	63.7	256.8	57,800 *	57,800 *	57,800 *	57,800 *	57,800 *	57,800 *	140
145	62.6	254.0	57,100 *	57,100 *	57,100 *	57,100 *	57,100 *	57,100 *	145
150	61.4	251.1	56,300 *	56,300 *	56,300 *	56,300 *	56,300 *	56,300 *	150
160	59.0	244.8	54,000 *	54,000 *	54,000 *	54,000 *	54,000 *	54,000 *	160
170	56.5	237.9	51,700 *	51,700 *	51,700 *	51,700 *	51,700 *	51,700 *	170
180	53.9	230.3	49,700 *	49,700 *	49,700 *	49,700 *	49,700 *	49,700 *	180
190	51.3	221.9	47,800 *	47,800 *	47,800 *	47,800 *	47,800 *	47,800 *	190
200	48.5	212.8	46,100 *	46,100 *	46,100 *	46,100 *	46,100 *	46,100 *	200
210	45.6	202.7	44,600 *	44,600 *	44,600 *	44,600 *	44,600 *	44,600 *	210
220	42.6	191.4	41,700 *	43,200 *	43,200 *	43,200 *	43,200 *	43,200 *	220
230	39.3	178.9	37,900	41,900 *	41,900 *	41,900 *	41,900 *	41,900 *	230
240	35.7	164.6	34,500	40,700 *	40,700 *	40,700 *	40,700 *	40,700 *	240
250	31.8	148.2	31,300	39,700 *	39,300	39,700 *	39,700 *	39,700 *	250




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

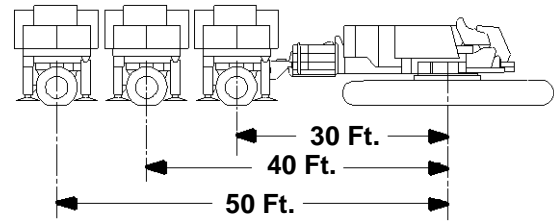

260 Ft. Boom

40 Ft. Jib, 15 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
65	80.8	305.2	75,200 *b	75,200 *b	75,200 *b	75,200 *b	75,200 *b	75,200 *b	65
70	79.8	304.2	73,800 *b	73,800 *b	73,800 *b	73,800 *b	73,800 *b	73,800 *b	70
75	78.8	303.0	72,400 *b	72,400 *b	72,400 *b	72,400 *b	72,400 *b	72,400 *b	75
80	77.9	301.8	71,100 *b	71,100 *b	71,100 *b	71,100 *b	71,100 *b	71,100 *b	80
85	76.9	300.5	69,800 *b	69,800 *b	69,800 *b	69,800 *b	69,800 *b	69,800 *b	85
90	75.9	299.0	68,600 *b	68,600 *b	68,600 *b	68,600 *b	68,600 *b	68,600 *b	90
95	74.9	297.5	67,500 *b	67,500 *b	67,500 *b	67,500 *b	67,500 *b	67,500 *b	95
100	73.9	295.9	66,400 *	66,400 *	66,400 *	66,400 *	66,400 *	66,400 *	100
105	72.9	294.2	65,300 *	65,300 *	65,300 *	65,300 *	65,300 *	65,300 *	105
110	71.9	292.4	64,300 *	64,300 *	64,300 *	64,300 *	64,300 *	64,300 *	110
115	70.9	290.5	63,400 *	63,400 *	63,400 *	63,400 *	63,400 *	63,400 *	115
120	69.8	288.5	62,400 *	62,400 *	62,400 *	62,400 *	62,400 *	62,400 *	120
125	68.8	286.4	61,600 *	61,600 *	61,600 *	61,600 *	61,600 *	61,600 *	125
130	67.8	284.1	60,700 *	60,700 *	60,700 *	60,700 *	60,700 *	60,700 *	130
135	66.7	281.8	59,900 *	59,900 *	59,900 *	59,900 *	59,900 *	59,900 *	135
140	65.6	279.4	59,100 *	59,100 *	59,100 *	59,100 *	59,100 *	59,100 *	140
145	64.6	276.8	58,400 *	58,400 *	58,400 *	58,400 *	58,400 *	58,400 *	145
150	63.5	274.1	57,700 *	57,700 *	57,700 *	57,700 *	57,700 *	57,700 *	150
160	61.3	268.4	56,300 *	56,300 *	56,300 *	56,300 *	56,300 *	56,300 *	160
170	59.1	262.1	54,200 *	54,200 *	54,200 *	54,200 *	54,200 *	54,200 *	170
180	56.7	255.3	52,100 *	52,100 *	52,100 *	52,100 *	52,100 *	52,100 *	180
190	54.4	247.8	50,200 *	50,200 *	50,200 *	50,200 *	50,200 *	50,200 *	190
200	51.9	239.7	48,400 *	48,400 *	48,400 *	48,400 *	48,400 *	48,400 *	200
210	49.4	230.8	45,400 *	46,800 *	46,800 *	46,800 *	46,800 *	46,800 *	210
220	46.7	221.1	41,300 *	45,300 *	45,300 *	45,300 *	45,300 *	45,300 *	220
230	43.9	210.4	37,500	43,900 *	43,900 *	43,900 *	43,900 *	43,900 *	230
240	41.0	198.6	34,100	42,600 *	42,500	42,600 *	42,600 *	42,600 *	240
250	37.8	185.4	30,900	40,600 *	39,000	40,600 *	40,600 *	40,600 *	250
260	34.4	170.5	28,000	33,300 *	33,300 *	33,300 *	33,300 *	33,300 *	260
270	30.6	153.4	25,300	26,400 *	26,400 *	26,400 *	26,400 *	26,400 *	270

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

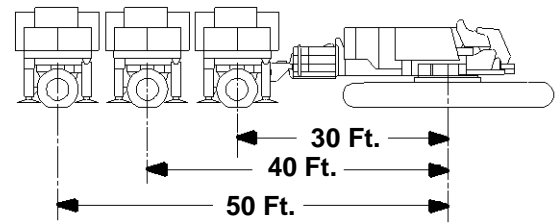

280 Ft. Boom
40 Ft. Jib, 15 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
70	80.6	324.5	73,900 *b	73,900 *b	73,900 *b	73,900 *b	73,900 *b	73,900 *b	70
75	79.6	323.4	72,600 *b	72,600 *b	72,600 *b	72,600 *b	72,600 *b	72,600 *b	75
80	78.7	322.2	71,400 *b	71,400 *b	71,400 *b	71,400 *b	71,400 *b	71,400 *b	80
85	77.8	321.0	70,200 *b	70,200 *b	70,200 *b	70,200 *b	70,200 *b	70,200 *b	85
90	76.9	319.7	69,000 *b	69,000 *b	69,000 *b	69,000 *b	69,000 *b	69,000 *b	90
95	76.0	318.3	67,900 *b	67,900 *b	67,900 *b	67,900 *b	67,900 *b	67,900 *b	95
100	75.0	316.8	66,900 *b	66,900 *b	66,900 *b	66,900 *b	66,900 *b	66,900 *b	100
105	74.1	315.2	65,900 *	65,900 *	65,900 *	65,900 *	65,900 *	65,900 *	105
110	73.1	313.5	64,900 *	64,900 *	64,900 *	64,900 *	64,900 *	64,900 *	110
115	72.2	311.7	64,000 *	64,000 *	64,000 *	64,000 *	64,000 *	64,000 *	115
120	71.2	309.8	63,100 *	63,100 *	63,100 *	63,100 *	63,100 *	63,100 *	120
125	70.3	307.9	62,300 *	62,300 *	62,300 *	62,300 *	62,300 *	62,300 *	125
130	69.3	305.8	61,400 *	61,400 *	61,400 *	61,400 *	61,400 *	61,400 *	130
135	68.4	303.6	60,700 *	60,700 *	60,700 *	60,700 *	60,700 *	60,700 *	135
140	67.4	301.4	59,900 *	59,900 *	59,900 *	59,900 *	59,900 *	59,900 *	140
145	66.4	299.0	59,200 *	59,200 *	59,200 *	59,200 *	59,200 *	59,200 *	145
150	65.4	296.5	58,500 *	58,500 *	58,500 *	58,500 *	58,500 *	58,500 *	150
160	63.4	291.3	57,200 *	57,200 *	57,200 *	57,200 *	57,200 *	57,200 *	160
170	61.3	285.5	55,900 *	55,900 *	55,900 *	55,900 *	55,900 *	55,900 *	170
180	59.2	279.3	54,800 *	54,800 *	54,800 *	54,800 *	54,800 *	54,800 *	180
190	57.0	272.5	53,800 *	53,800 *	53,800 *	53,800 *	53,800 *	53,800 *	190
200	54.8	265.2	50,000	52,800 *	52,800 *	52,800 *	52,800 *	52,800 *	200
210	52.6	257.2	45,500	51,900 *	51,900 *	51,900 *	51,900 *	51,900 *	210
220	50.2	248.6	41,400	51,100 *	50,600	51,100 *	51,100 *	51,100 *	220
230	47.7	239.1	37,600	50,400 *	46,400	50,400 *	50,400 *	50,400 *	230
240	45.2	228.9	34,200	49,800 *	42,600	49,800 *	49,800 *	49,800 *	240
250	42.5	217.6	31,100	49,200 *	39,100	49,200 *	47,200	49,200 *	250
260	39.6	205.2	28,200	48,500 *	35,900	48,800 *	43,700	48,800 *	260
270	36.6	191.4	25,500	43,600 *	32,900	48,400 *	40,400	48,400 *	270
280	33.3	175.8	22,900	39,000 *	30,100	48,200 *	37,300	48,200 *	280




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

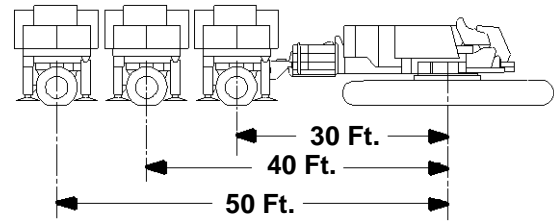

300 Ft. Boom

40 Ft. Jib, 15 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
75	80.3	343.8	73,300 *b	73,300 *b	73,300 *b	73,300 *b	73,300 *b	73,300 *b	75
80	79.4	342.8	72,100 *b	72,100 *b	72,100 *b	72,100 *b	72,100 *b	72,100 *b	80
85	78.5	341.6	71,000 *b	71,000 *b	71,000 *b	71,000 *b	71,000 *b	71,000 *b	85
90	77.7	340.3	69,900 *b	69,900 *b	69,900 *b	69,900 *b	69,900 *b	69,900 *b	90
95	76.8	339.0	68,800 *b	68,800 *b	68,800 *b	68,800 *b	68,800 *b	68,800 *b	95
100	75.9	337.6	67,800 *b	67,800 *b	67,800 *b	67,800 *b	67,800 *b	67,800 *b	100
105	75.1	336.1	66,800 *b	66,800 *b	66,800 *b	66,800 *b	66,800 *b	66,800 *b	105
110	74.2	334.6	65,900 *	65,900 *	65,900 *	65,900 *	65,900 *	65,900 *	110
115	73.3	332.9	65,000 *	65,000 *	65,000 *	65,000 *	65,000 *	65,000 *	115
120	72.4	331.1	64,100 *	64,100 *	64,100 *	64,100 *	64,100 *	64,100 *	120
125	71.5	329.3	63,300 *	63,300 *	63,300 *	63,300 *	63,300 *	63,300 *	125
130	70.6	327.4	62,500 *	62,500 *	62,500 *	62,500 *	62,500 *	62,500 *	130
135	69.7	325.4	61,700 *	61,700 *	61,700 *	61,700 *	61,700 *	61,700 *	135
140	68.8	323.3	61,000 *	61,000 *	61,000 *	61,000 *	61,000 *	61,000 *	140
145	67.9	321.1	60,200 *	60,200 *	60,200 *	60,200 *	60,200 *	60,200 *	145
150	66.9	318.8	59,600 *	59,600 *	59,600 *	59,600 *	59,600 *	59,600 *	150
160	65.1	313.9	58,200 *	58,200 *	58,200 *	58,200 *	58,200 *	58,200 *	160
170	63.2	308.6	57,000 *	57,000 *	57,000 *	57,000 *	57,000 *	57,000 *	170
180	61.2	302.8	55,900 *	55,900 *	55,900 *	55,900 *	55,900 *	55,900 *	180
190	59.3	296.6	54,400 *	54,900 *	54,900 *	54,900 *	54,900 *	54,900 *	190
200	57.2	289.9	49,400	53,900 *	53,900 *	53,900 *	53,900 *	53,900 *	200
210	55.2	282.7	44,900	53,000 *	53,000 *	53,000 *	53,000 *	53,000 *	210
220	53.0	274.9	40,800	52,100 *	50,000	52,100 *	52,100 *	52,100 *	220
230	50.8	266.4	37,000	51,400 *	45,800	51,400 *	51,400 *	51,400 *	230
240	48.5	257.3	33,600	50,700 *	42,000	50,700 *	50,500	50,700 *	240
250	46.2	247.4	30,500	50,000 *	38,500	50,000 *	46,600	50,000 *	250
260	43.7	236.6	27,600	49,500 *	35,300	49,500 *	43,100	49,500 *	260
270	41.1	224.8	24,900	45,000 *	32,300	49,000 *	39,800	49,000 *	270
280	38.4	211.8	22,400	40,400 *	29,500	48,600 *	36,700	48,600 *	280
290	35.4	197.5	20,000	36,100 *	26,900	48,300 *	33,900	48,300 *	290
300	32.2	181.3	17,800	31,900 *	24,500	47,300 *	31,200	48,200 *	300

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

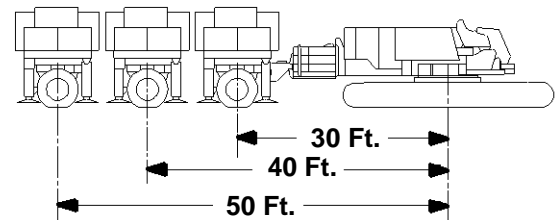

320 Ft. Boom
40 Ft. Jib, 15 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
75	80.8	364.2	74,000 *b	74,000 *b	74,000 *b	74,000 *b	74,000 *b	74,000 *b	75
80	80.0	363.2	72,900 *b	72,900 *b	72,900 *b	72,900 *b	72,900 *b	72,900 *b	80
85	79.2	362.1	71,800 *b	71,800 *b	71,800 *b	71,800 *b	71,800 *b	71,800 *b	85
90	78.4	360.9	70,700 *b	70,700 *b	70,700 *b	70,700 *b	70,700 *b	70,700 *b	90
95	77.6	359.7	69,700 *b	69,700 *b	69,700 *b	69,700 *b	69,700 *b	69,700 *b	95
100	76.7	358.4	68,700 *b	68,700 *b	68,700 *b	68,700 *b	68,700 *b	68,700 *b	100
105	75.9	357.0	67,800 *b	67,800 *b	67,800 *b	67,800 *b	67,800 *b	67,800 *b	105
110	75.1	355.5	66,800 *b	66,800 *b	66,800 *b	66,800 *b	66,800 *b	66,800 *b	110
115	74.3	353.9	65,900 *	65,900 *	65,900 *	65,900 *	65,900 *	65,900 *	115
120	73.4	352.3	65,100 *	65,100 *	65,100 *	65,100 *	65,100 *	65,100 *	120
125	72.6	350.6	64,300 *	64,300 *	64,300 *	64,300 *	64,300 *	64,300 *	125
130	71.7	348.8	63,500 *	63,500 *	63,500 *	63,500 *	63,500 *	63,500 *	130
135	70.9	346.9	62,700 *	62,700 *	62,700 *	62,700 *	62,700 *	62,700 *	135
140	70.0	344.9	62,000 *	62,000 *	62,000 *	62,000 *	62,000 *	62,000 *	140
145	69.2	342.9	61,300 *	61,300 *	61,300 *	61,300 *	61,300 *	61,300 *	145
150	68.3	340.7	60,600 *	60,600 *	60,600 *	60,600 *	60,600 *	60,600 *	150
160	66.6	336.2	59,300 *	59,300 *	59,300 *	59,300 *	59,300 *	59,300 *	160
170	64.8	331.2	58,100 *	58,100 *	58,100 *	58,100 *	58,100 *	58,100 *	170
180	63.0	325.9	56,700 *	56,900 *	56,900 *	56,900 *	56,900 *	56,900 *	180
190	61.2	320.1	51,100 *	55,900 *	55,900 *	55,900 *	55,900 *	55,900 *	190
200	59.3	313.9	46,000 *	54,900 *	54,900 *	54,900 *	54,900 *	54,900 *	200
210	57.4	307.3	41,500 *	53,900 *	51,100 *	53,900 *	53,900 *	53,900 *	210
220	55.4	300.1	37,400 *	53,100 *	46,600 *	53,100 *	53,100 *	53,100 *	220
230	53.4	292.5	33,600 *	52,300 *	42,400 *	52,300 *	51,300 *	52,300 *	230
240	51.4	284.2	30,200 *	51,500 *	38,600 *	51,500 *	47,100 *	51,500 *	240
250	49.2	275.3	27,100 *	49,800 *	35,100 *	50,800 *	43,200 *	50,800 *	250
260	47.0	265.7	24,200 *	46,200 *	31,900 *	50,200 *	39,600 *	50,200 *	260
270	44.8	255.3	21,500 *	42,400 *	28,900 *	49,700 *	36,400 *	49,700 *	270
280	42.4	244.1	19,000 *	37,800 *	26,100 *	49,200 *	33,300 *	49,200 *	280
290	39.9	231.8	16,600 *	33,400 *	23,500 *	48,800 *	30,400 *	48,800 *	290
300	37.2	218.3	14,100 *	29,400 *	21,100 *	45,100 *	27,800 *	48,500 *	300
310	34.3	203.3	11,600 *	25,500 *	18,800 *	40,600 *	25,300 *	48,200 *	310
320	31.2	186.6	9,200 *	21,800 *	16,600 *	36,300 *	22,900 *	48,000 *	320




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

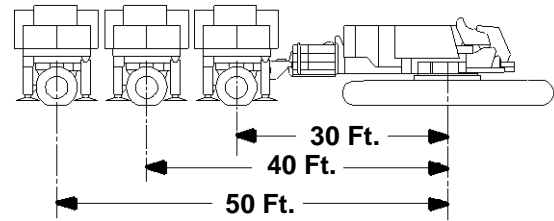

340 Ft. Boom

40 Ft. Jib, 15 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
80	80.5	383.6	73,400 *b	73,400 *b	73,400 *b	73,400 *b	73,400 *b	73,400 *b	80
85	79.8	382.6	72,400 *b	72,400 *b	72,400 *b	72,400 *b	72,400 *b	72,400 *b	85
90	79.0	381.5	71,400 *b	71,400 *b	71,400 *b	71,400 *b	71,400 *b	71,400 *b	90
95	78.2	380.3	70,400 *b	70,400 *b	70,400 *b	70,400 *b	70,400 *b	70,400 *b	95
100	77.4	379.1	69,400 *b	69,400 *b	69,400 *b	69,400 *b	69,400 *b	69,400 *b	100
105	76.7	377.7	68,500 *b	68,500 *b	68,500 *b	68,500 *b	68,500 *b	68,500 *b	105
110	75.9	376.3	67,600 *b	67,600 *b	67,600 *b	67,600 *b	67,600 *b	67,600 *b	110
115	75.1	374.9	66,800 *b	66,800 *b	66,800 *b	66,800 *b	66,800 *b	66,800 *b	115
120	74.3	373.3	65,900 *	65,900 *	65,900 *	65,900 *	65,900 *	65,900 *	120
125	73.5	371.7	65,100 *	65,100 *	65,100 *	65,100 *	65,100 *	65,100 *	125
130	72.7	370.0	64,400 *	64,400 *	64,400 *	64,400 *	64,400 *	64,400 *	130
135	71.9	368.2	63,600 *	63,600 *	63,600 *	63,600 *	63,600 *	63,600 *	135
140	71.1	366.4	62,900 *	62,900 *	62,900 *	62,900 *	62,900 *	62,900 *	140
145	70.3	364.4	62,200 *	62,200 *	62,200 *	62,200 *	62,200 *	62,200 *	145
150	69.5	362.4	61,500 *	61,500 *	61,500 *	61,500 *	61,500 *	61,500 *	150
160	67.9	358.2	60,200 *	60,200 *	60,200 *	60,200 *	60,200 *	60,200 *	160
170	66.2	353.5	59,100 *	59,100 *	59,100 *	59,100 *	59,100 *	59,100 *	170
180	64.5	348.5	56,100 *	57,900 *	57,900 *	57,900 *	57,900 *	57,900 *	180
190	62.8	343.2	50,400 *	56,800 *	56,800 *	56,800 *	56,800 *	56,800 *	190
200	61.1	337.4	45,400 *	55,800 *	55,600 *	55,800 *	55,800 *	55,800 *	200
210	59.3	331.3	40,900 *	54,800 *	50,500 *	54,800 *	54,800 *	54,800 *	210
220	57.5	324.7	36,800 *	53,900 *	45,900 *	53,900 *	53,900 *	53,900 *	220
230	55.7	317.6	33,000 *	53,100 *	41,800 *	53,100 *	50,600 *	53,100 *	230
240	53.8	310.0	29,600 *	52,300 *	38,000 *	52,300 *	46,400 *	52,300 *	240
250	51.9	301.9	26,400 *	49,100 *	34,500 *	51,600 *	42,600 *	51,600 *	250
260	49.9	293.2	23,500 *	45,400 *	31,200 *	51,000 *	39,000 *	51,000 *	260
270	47.8	283.9	20,800 *	42,100 *	28,300 *	50,400 *	35,700 *	50,400 *	270
280	45.7	273.9	18,300 *	38,700 *	25,500 *	49,800 *	32,700 *	49,800 *	280
290	43.5	263.0	15,900 *	34,400 *	22,900 *	48,200 *	29,800 *	49,300 *	290
300	41.1	251.3	13,200 *	30,300 *	20,500 *	45,000 *	27,200 *	48,900 *	300
310	38.7	238.5	10,700 *	26,500 *	18,200 *	41,900 *	24,700 *	48,600 *	310
320	36.1	224.5	8,400 *	22,800 *	16,100 *	37,600 *	22,300 *	48,300 *	320
330	33.3	209.0	6,200 *	19,400 *	13,900 *	33,600 *	20,100 *	44,900 *	330

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

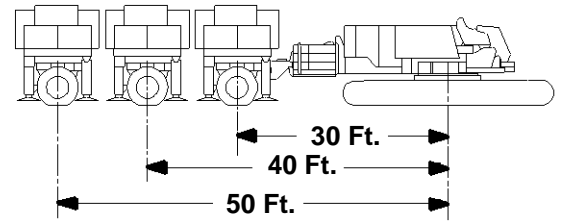

360 Ft. Boom
40 Ft. Jib, 15 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	40 Ft. Position	50 Ft. Position		Jib Oper. Rad. Feet
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
80	81.0	404.0	73,800 *b	73,800 *b	73,800 *b	80
85	80.3	403.0	72,800 *b	72,800 *b	72,800 *b	85
90	79.6	402.0	71,900 *b	71,900 *b	71,900 *b	90
95	78.8	400.8	70,900 *b	70,900 *b	70,900 *b	95
100	78.1	399.7	70,000 *b	70,000 *b	70,000 *b	100
105	77.4	398.4	69,100 *b	69,100 *b	69,100 *b	105
110	76.6	397.1	68,300 *b	68,300 *b	68,300 *b	110
115	75.9	395.7	67,500 *b	67,500 *b	67,500 *b	115
120	75.1	394.2	66,700 *b	66,700 *b	66,700 *b	120
125	74.4	392.7	65,900 *	65,900 *	65,900 *	125
130	73.6	391.1	65,100 *	65,100 *	65,100 *	130
135	72.9	389.4	64,400 *	64,400 *	64,400 *	135
140	72.1	387.7	63,700 *	63,700 *	63,700 *	140
145	71.4	385.9	63,000 *	63,000 *	63,000 *	145
150	70.6	384.0	62,400 *	62,400 *	62,400 *	150
160	69.1	379.9	61,100 *	61,100 *	61,100 *	160
170	67.5	375.6	59,900 *	59,900 *	59,900 *	170
180	65.9	370.9	58,700 *	58,700 *	58,700 *	180
190	64.3	365.9	57,600 *	57,600 *	57,600 *	190
200	62.7	360.5	56,600 *	56,600 *	56,600 *	200
210	61.0	354.7	55,600 *	55,600 *	55,600 *	210
220	59.4	348.6	54,700 *	54,700 *	54,700 *	220
230	57.7	342.0	53,900 *	50,500	53,900 *	230
240	55.9	335.0	53,100 *	46,300	53,100 *	240
250	54.1	327.6	52,300 *	42,400	52,300 *	250
260	52.3	319.6	51,600 *	38,900	51,600 *	260
270	50.4	311.1	51,000 *	35,600	51,000 *	270
280	48.5	302.0	50,400 *	32,500	50,400 *	280
290	46.5	292.2	48,000 *	29,700	49,900 *	290
300	44.4	281.8	44,800 *	27,100	49,400 *	300
310	42.3	270.5	41,900 *	24,600	49,000 *	310
320	40.0	258.3	39,100 *	22,200	48,700 *	320
330	37.6	245.1	35,300 *	20,100	45,400 *	330
340	35.1	230.6	31,500 *	18,000	40,700 *	340
350	32.4	214.6	27,900 *	16,000	35,900 *	350




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

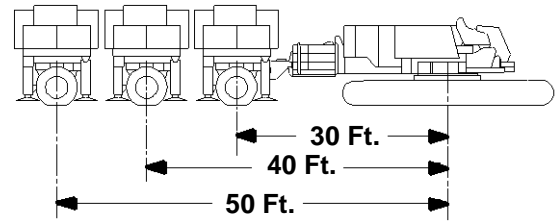

380 Ft. Boom 40 Ft. Jib, 15 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	50 Ft. Position
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds
85	80.8	423.4	73,200 *b
90	80.1	422.4	72,300 *b
95	79.4	421.3	71,400 *b
100	78.7	420.2	70,500 *b
105	78.0	419.0	69,700 *b
110	77.3	417.8	68,900 *b
115	76.6	416.4	68,100 *b
120	75.9	415.1	67,300 *b
125	75.1	413.6	66,600 *b
130	74.4	412.1	65,900 *
135	73.7	410.5	65,100 *
140	73.0	408.8	64,400 *
145	72.3	407.1	63,700 *
150	71.6	405.3	63,000 *
160	70.1	401.5	61,800 *
170	68.6	397.4	60,600 *
180	67.1	393.0	59,400 *
190	65.6	388.3	58,300 *
200	64.1	383.2	57,300 *
210	62.6	377.8	56,300 *
220	61.0	372.1	55,400 *
230	59.4	365.9	54,600 *
240	57.8	359.4	53,800 *
250	56.1	352.5	53,000 *
260	54.4	345.1	52,300 *
270	52.7	337.2	51,600 *
280	50.9	328.9	51,000 *
290	49.1	320.0	50,500 *
300	47.2	310.5	50,000 *
310	45.3	300.3	49,500 *
320	43.3	289.4	49,100 *
330	41.2	277.7	44,800 *
340	39.0	265.1	39,900 *
350	36.7	251.4	35,300 *
360	34.2	236.5	30,900 *
370	31.6	220.0	26,700 *

400 Ft. Boom 40 Ft. Jib, 15 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	50 Ft. Position
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds
90	80.5	442.8	72,500 *b
95	79.9	441.8	71,700 *b
100	79.2	440.7	70,900 *b
105	78.5	439.6	70,100 *b
110	77.9	438.4	69,300 *b
115	77.2	437.1	68,600 *b
120	76.5	435.8	67,900 *b
125	75.8	434.4	67,100 *b
130	75.2	433.0	66,300 *b
135	74.5	431.5	65,600 *
140	73.8	429.9	64,900 *
145	73.1	428.3	64,200 *
150	72.4	426.5	63,600 *
160	71.1	422.9	62,300 *
170	69.7	419.0	61,100 *
180	68.2	414.9	59,900 *
190	66.8	410.4	58,900 *
200	65.4	405.6	57,900 *
210	63.9	400.5	56,900 *
220	62.4	395.1	56,000 *
230	60.9	389.4	55,200 *
240	59.4	383.3	54,400 *
250	57.9	376.8	53,600 *
260	56.3	369.9	52,800 *
270	54.7	362.6	52,200 *
280	53.0	354.9	51,500 *
290	51.4	346.6	51,000 *
300	49.6	337.9	50,400 *
310	47.9	328.6	50,000 *
320	46.0	318.8	49,000 *
330	44.1	308.2	45,000 *
340	42.2	296.9	40,200 *
350	40.1	284.8	35,600 *
360	38.0	271.8	31,300 *
370	35.8	257.6	27,200 *
380	33.4	242.2	23,300 *

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

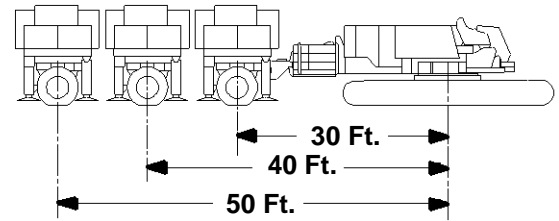

200 Ft. Boom
40 Ft. Jib, 30 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
65	80.4	240.8	50,700 *	50,700 *	50,700 *	50,700 *	50,700 *	50,700 *	65
70	79.1	239.5	49,200 *	49,200 *	49,200 *	49,200 *	49,200 *	49,200 *	70
75	77.9	238.0	47,900 *	47,900 *	47,900 *	47,900 *	47,900 *	47,900 *	75
80	76.6	236.4	46,700 *	46,700 *	46,700 *	46,700 *	46,700 *	46,700 *	80
85	75.3	234.7	45,500 *	45,500 *	45,500 *	45,500 *	45,500 *	45,500 *	85
90	74.1	232.8	44,400 *	44,400 *	44,400 *	44,400 *	44,400 *	44,400 *	90
95	72.8	230.9	43,300 *	43,300 *	43,300 *	43,300 *	43,300 *	43,300 *	95
100	71.5	228.8	42,400 *	42,400 *	42,400 *	42,400 *	42,400 *	42,400 *	100
105	70.1	226.5	41,400 *	41,400 *	41,400 *	41,400 *	41,400 *	41,400 *	105
110	68.8	224.1	40,600 *	40,600 *	40,600 *	40,600 *	40,600 *	40,600 *	110
115	67.5	221.6	39,700 *	39,700 *	39,700 *	39,700 *	39,700 *	39,700 *	115
120	66.1	218.9	38,900 *	38,900 *	38,900 *	38,900 *	38,900 *	38,900 *	120
125	64.7	216.1	38,200 *	38,200 *	38,200 *	38,200 *	38,200 *	38,200 *	125
130	63.3	213.1	37,500 *	37,500 *	37,500 *	37,500 *	37,500 *	37,500 *	130
135	61.9	210.0	36,800 *	36,800 *	36,800 *	36,800 *	36,800 *	36,800 *	135
140	60.4	206.6	36,200 *	36,200 *	36,200 *	36,200 *	36,200 *	36,200 *	140
145	59.0	203.1	35,500 *	35,500 *	35,500 *	35,500 *	35,500 *	35,500 *	145
150	57.5	199.4	35,000 *	35,000 *	35,000 *	35,000 *	35,000 *	35,000 *	150
160	54.4	191.3	33,900 *	33,900 *	33,900 *	33,900 *	33,900 *	33,900 *	160
170	51.1	182.2	33,000 *	33,000 *	33,000 *	33,000 *	33,000 *	33,000 *	170
180	47.7	172.0	32,100 *	32,100 *	32,100 *	32,100 *	32,100 *	32,100 *	180
190	44.0	160.5	31,400 *	31,400 *	31,400 *	31,400 *	31,400 *	31,400 *	190




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

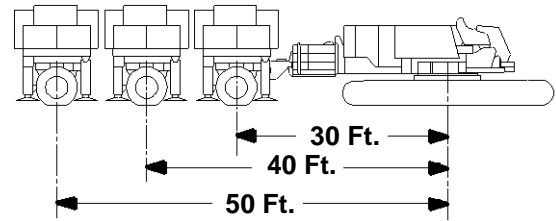

220 Ft. Boom
40 Ft. Jib, 30 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
70	80.0	260.1	50,200 *	50,200 *	50,200 *	50,200 *	50,200 *	50,200 *	70
75	78.8	258.8	48,900 *	48,900 *	48,900 *	48,900 *	48,900 *	48,900 *	75
80	77.7	257.3	47,700 *	47,700 *	47,700 *	47,700 *	47,700 *	47,700 *	80
85	76.5	255.7	46,600 *	46,600 *	46,600 *	46,600 *	46,600 *	46,600 *	85
90	75.4	254.0	45,500 *	45,500 *	45,500 *	45,500 *	45,500 *	45,500 *	90
95	74.2	252.2	44,500 *	44,500 *	44,500 *	44,500 *	44,500 *	44,500 *	95
100	73.0	250.3	43,500 *	43,500 *	43,500 *	43,500 *	43,500 *	43,500 *	100
105	71.8	248.3	42,600 *	42,600 *	42,600 *	42,600 *	42,600 *	42,600 *	105
110	70.6	246.1	41,700 *	41,700 *	41,700 *	41,700 *	41,700 *	41,700 *	110
115	69.4	243.8	40,900 *	40,900 *	40,900 *	40,900 *	40,900 *	40,900 *	115
120	68.1	241.4	40,100 *	40,100 *	40,100 *	40,100 *	40,100 *	40,100 *	120
125	66.9	238.9	39,400 *	39,400 *	39,400 *	39,400 *	39,400 *	39,400 *	125
130	65.6	236.2	38,700 *	38,700 *	38,700 *	38,700 *	38,700 *	38,700 *	130
135	64.3	233.4	38,000 *	38,000 *	38,000 *	38,000 *	38,000 *	38,000 *	135
140	63.1	230.4	37,300 *	37,300 *	37,300 *	37,300 *	37,300 *	37,300 *	140
145	61.7	227.2	36,700 *	36,700 *	36,700 *	36,700 *	36,700 *	36,700 *	145
150	60.4	223.9	36,100 *	36,100 *	36,100 *	36,100 *	36,100 *	36,100 *	150
160	57.7	216.8	35,000 *	35,000 *	35,000 *	35,000 *	35,000 *	35,000 *	160
170	54.9	208.9	34,100 *	34,100 *	34,100 *	34,100 *	34,100 *	34,100 *	170
180	51.9	200.2	33,200 *	33,200 *	33,200 *	33,200 *	33,200 *	33,200 *	180
190	48.8	190.5	32,400 *	32,400 *	32,400 *	32,400 *	32,400 *	32,400 *	190
200	45.5	179.6	31,700 *	31,700 *	31,700 *	31,700 *	31,700 *	31,700 *	200

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

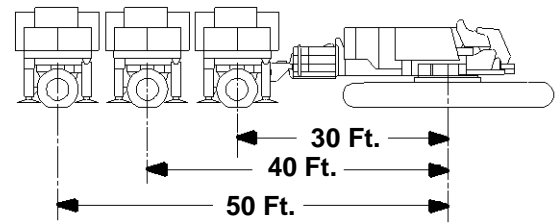

240 Ft. Boom
40 Ft. Jib, 30 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
70	80.7	280.7	51,100 *	51,100 *	51,100 *	51,100 *	51,100 *	51,100 *	70
75	79.7	279.4	49,800 *	49,800 *	49,800 *	49,800 *	49,800 *	49,800 *	75
80	78.6	278.1	48,700 *	48,700 *	48,700 *	48,700 *	48,700 *	48,700 *	80
85	77.5	276.6	47,600 *	47,600 *	47,600 *	47,600 *	47,600 *	47,600 *	85
90	76.4	275.1	46,500 *	46,500 *	46,500 *	46,500 *	46,500 *	46,500 *	90
95	75.4	273.4	45,500 *	45,500 *	45,500 *	45,500 *	45,500 *	45,500 *	95
100	74.3	271.7	44,600 *	44,600 *	44,600 *	44,600 *	44,600 *	44,600 *	100
105	73.2	269.8	43,700 *	43,700 *	43,700 *	43,700 *	43,700 *	43,700 *	105
110	72.1	267.8	42,800 *	42,800 *	42,800 *	42,800 *	42,800 *	42,800 *	110
115	70.9	265.7	42,000 *	42,000 *	42,000 *	42,000 *	42,000 *	42,000 *	115
120	69.8	263.5	41,200 *	41,200 *	41,200 *	41,200 *	41,200 *	41,200 *	120
125	68.7	261.2	40,500 *	40,500 *	40,500 *	40,500 *	40,500 *	40,500 *	125
130	67.5	258.7	39,800 *	39,800 *	39,800 *	39,800 *	39,800 *	39,800 *	130
135	66.4	256.2	39,100 *	39,100 *	39,100 *	39,100 *	39,100 *	39,100 *	135
140	65.2	253.4	38,400 *	38,400 *	38,400 *	38,400 *	38,400 *	38,400 *	140
145	64.0	250.6	37,800 *	37,800 *	37,800 *	37,800 *	37,800 *	37,800 *	145
150	62.8	247.6	37,200 *	37,200 *	37,200 *	37,200 *	37,200 *	37,200 *	150
160	60.4	241.2	36,100 *	36,100 *	36,100 *	36,100 *	36,100 *	36,100 *	160
170	57.9	234.2	35,100 *	35,100 *	35,100 *	35,100 *	35,100 *	35,100 *	170
180	55.3	226.5	34,200 *	34,200 *	34,200 *	34,200 *	34,200 *	34,200 *	180
190	52.6	218.0	33,400 *	33,400 *	33,400 *	33,400 *	33,400 *	33,400 *	190
200	49.7	208.7	32,600 *	32,600 *	32,600 *	32,600 *	32,600 *	32,600 *	200
210	46.8	198.3	32,000 *	32,000 *	32,000 *	32,000 *	32,000 *	32,000 *	210
220	43.6	186.8	31,400 *	31,400 *	31,400 *	31,400 *	31,400 *	31,400 *	220




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

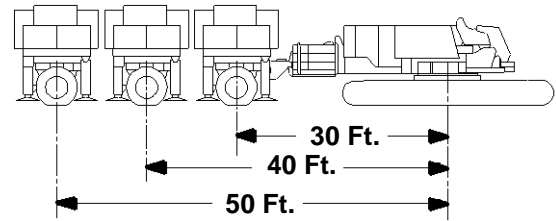

260 Ft. Boom

40 Ft. Jib, 30 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
75	80.4	300.0	50,800 *	50,800 *	50,800 *	50,800 *	50,800 *	50,800 *	75
80	79.4	298.7	49,700 *	49,700 *	49,700 *	49,700 *	49,700 *	49,700 *	80
85	78.4	297.4	48,600 *	48,600 *	48,600 *	48,600 *	48,600 *	48,600 *	85
90	77.4	295.9	47,600 *	47,600 *	47,600 *	47,600 *	47,600 *	47,600 *	90
95	76.4	294.4	46,600 *	46,600 *	46,600 *	46,600 *	46,600 *	46,600 *	95
100	75.4	292.8	45,600 *	45,600 *	45,600 *	45,600 *	45,600 *	45,600 *	100
105	74.4	291.1	44,800 *	44,800 *	44,800 *	44,800 *	44,800 *	44,800 *	105
110	73.3	289.2	43,900 *	43,900 *	43,900 *	43,900 *	43,900 *	43,900 *	110
115	72.3	287.3	43,100 *	43,100 *	43,100 *	43,100 *	43,100 *	43,100 *	115
120	71.3	285.3	42,300 *	42,300 *	42,300 *	42,300 *	42,300 *	42,300 *	120
125	70.2	283.1	41,600 *	41,600 *	41,600 *	41,600 *	41,600 *	41,600 *	125
130	69.2	280.9	40,900 *	40,900 *	40,900 *	40,900 *	40,900 *	40,900 *	130
135	68.1	278.5	40,200 *	40,200 *	40,200 *	40,200 *	40,200 *	40,200 *	135
140	67.0	276.0	39,500 *	39,500 *	39,500 *	39,500 *	39,500 *	39,500 *	140
145	65.9	273.4	38,900 *	38,900 *	38,900 *	38,900 *	38,900 *	38,900 *	145
150	64.9	270.7	38,300 *	38,300 *	38,300 *	38,300 *	38,300 *	38,300 *	150
160	62.6	264.9	37,200 *	37,200 *	37,200 *	37,200 *	37,200 *	37,200 *	160
170	60.4	258.5	36,200 *	36,200 *	36,200 *	36,200 *	36,200 *	36,200 *	170
180	58.0	251.6	35,200 *	35,200 *	35,200 *	35,200 *	35,200 *	35,200 *	180
190	55.6	244.0	34,400 *	34,400 *	34,400 *	34,400 *	34,400 *	34,400 *	190
200	53.1	235.8	33,600 *	33,600 *	33,600 *	33,600 *	33,600 *	33,600 *	200
210	50.5	226.7	32,900 *	32,900 *	32,900 *	32,900 *	32,900 *	32,900 *	210
220	47.8	216.8	31,800 *	31,800 *	31,800 *	31,800 *	31,800 *	31,800 *	220
230	45.0	205.9	26,200 *	26,200 *	26,200 *	26,200 *	26,200 *	26,200 *	230

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

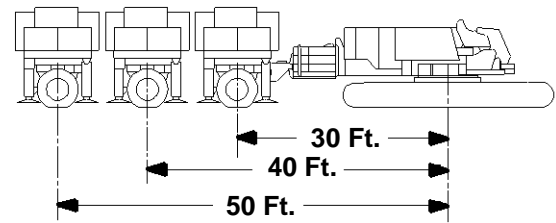

280 Ft. Boom
40 Ft. Jib, 30 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
75	80.9	320.6	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	75
80	80.0	319.5	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	80
85	79.1	318.2	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	85
90	78.1	316.9	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	90
95	77.2	315.5	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	95
100	76.3	313.9	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	100
105	75.3	312.3	54,400 *	54,400 *	54,400 *	54,400 *	54,400 *	54,400 *	105
110	74.4	310.6	53,500 *	53,500 *	53,500 *	53,500 *	53,500 *	53,500 *	110
115	73.4	308.8	52,500 *	52,500 *	52,500 *	52,500 *	52,500 *	52,500 *	115
120	72.5	307.0	51,600 *	51,600 *	51,600 *	51,600 *	51,600 *	51,600 *	120
125	71.5	305.0	50,800 *	50,800 *	50,800 *	50,800 *	50,800 *	50,800 *	125
130	70.5	302.9	49,900 *	49,900 *	49,900 *	49,900 *	49,900 *	49,900 *	130
135	69.5	300.7	49,100 *	49,100 *	49,100 *	49,100 *	49,100 *	49,100 *	135
140	68.5	298.4	48,400 *	48,400 *	48,400 *	48,400 *	48,400 *	48,400 *	140
145	67.5	296.0	47,700 *	47,700 *	47,700 *	47,700 *	47,700 *	47,700 *	145
150	66.5	293.5	47,000 *	47,000 *	47,000 *	47,000 *	47,000 *	47,000 *	150
160	64.5	288.2	45,600 *	45,600 *	45,600 *	45,600 *	45,600 *	45,600 *	160
170	62.4	282.4	44,400 *	44,400 *	44,400 *	44,400 *	44,400 *	44,400 *	170
180	60.3	276.1	43,300 *	43,300 *	43,300 *	43,300 *	43,300 *	43,300 *	180
190	58.1	269.2	42,200 *	42,200 *	42,200 *	42,200 *	42,200 *	42,200 *	190
200	55.9	261.8	41,300 *	41,300 *	41,300 *	41,300 *	41,300 *	41,300 *	200
210	53.5	253.7	40,400 *	40,400 *	40,400 *	40,400 *	40,400 *	40,400 *	210
220	51.1	244.9	39,600 *	39,600 *	39,600 *	39,600 *	39,600 *	39,600 *	220
230	48.7	235.4	38,800 *	38,800 *	38,800 *	38,800 *	38,800 *	38,800 *	230
240	46.1	224.9	38,200 *	38,200 *	38,200 *	38,200 *	38,200 *	38,200 *	240
250	43.3	213.4	31,500 *	37,600 *	37,600 *	37,600 *	37,600 *	37,600 *	250




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

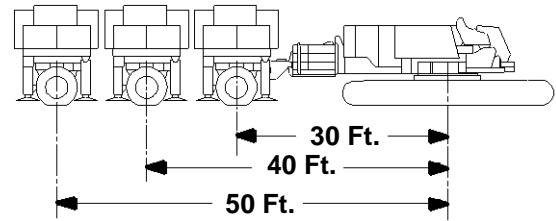

300 Ft. Boom

40 Ft. Jib, 30 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
80	80.6	340.0	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	80
85	79.7	338.8	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	85
90	78.9	337.5	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	90
95	78.0	336.2	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	95
100	77.1	334.8	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	100
105	76.2	333.3	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	105
110	75.3	331.7	54,500 *	54,500 *	54,500 *	54,500 *	54,500 *	54,500 *	110
115	74.4	330.0	53,600 *	53,600 *	53,600 *	53,600 *	53,600 *	53,600 *	115
120	73.5	328.3	52,700 *	52,700 *	52,700 *	52,700 *	52,700 *	52,700 *	120
125	72.6	326.4	51,800 *	51,800 *	51,800 *	51,800 *	51,800 *	51,800 *	125
130	71.7	324.5	51,000 *	51,000 *	51,000 *	51,000 *	51,000 *	51,000 *	130
135	70.8	322.4	50,200 *	50,200 *	50,200 *	50,200 *	50,200 *	50,200 *	135
140	69.9	320.3	49,500 *	49,500 *	49,500 *	49,500 *	49,500 *	49,500 *	140
145	69.0	318.1	48,800 *	48,800 *	48,800 *	48,800 *	48,800 *	48,800 *	145
150	68.0	315.8	48,100 *	48,100 *	48,100 *	48,100 *	48,100 *	48,100 *	150
160	66.1	310.8	46,700 *	46,700 *	46,700 *	46,700 *	46,700 *	46,700 *	160
170	64.2	305.5	45,500 *	45,500 *	45,500 *	45,500 *	45,500 *	45,500 *	170
180	62.3	299.7	44,400 *	44,400 *	44,400 *	44,400 *	44,400 *	44,400 *	180
190	60.3	293.4	43,300 *	43,300 *	43,300 *	43,300 *	43,300 *	43,300 *	190
200	58.2	286.6	42,300 *	42,300 *	42,300 *	42,300 *	42,300 *	42,300 *	200
210	56.1	279.3	41,400 *	41,400 *	41,400 *	41,400 *	41,400 *	41,400 *	210
220	54.0	271.3	40,600 *	40,600 *	40,600 *	40,600 *	40,600 *	40,600 *	220
230	51.7	262.8	37,700	39,800 *	39,800 *	39,800 *	39,800 *	39,800 *	230
240	49.4	253.5	34,200	39,100 *	39,100 *	39,100 *	39,100 *	39,100 *	240
250	47.0	243.5	31,000	38,400 *	38,400 *	38,400 *	38,400 *	38,400 *	250
260	44.5	232.5	28,100	37,900 *	35,800	37,900 *	37,900 *	37,900 *	260

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

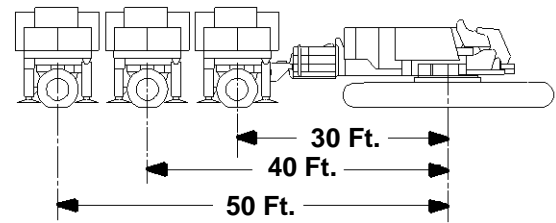

320 Ft. Boom
40 Ft. Jib, 30 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
85	80.3	359.3	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	85
90	79.5	358.1	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	90
95	78.7	356.9	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	95
100	77.9	355.5	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	100
105	77.0	354.1	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	105
110	76.2	352.6	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	110
115	75.3	351.1	54,500 *	54,500 *	54,500 *	54,500 *	54,500 *	54,500 *	115
120	74.5	349.4	53,600 *	53,600 *	53,600 *	53,600 *	53,600 *	53,600 *	120
125	73.7	347.7	52,700 *	52,700 *	52,700 *	52,700 *	52,700 *	52,700 *	125
130	72.8	345.9	51,900 *	51,900 *	51,900 *	51,900 *	51,900 *	51,900 *	130
135	72.0	344.0	51,200 *	51,200 *	51,200 *	51,200 *	51,200 *	51,200 *	135
140	71.1	342.0	50,400 *	50,400 *	50,400 *	50,400 *	50,400 *	50,400 *	140
145	70.2	339.9	49,700 *	49,700 *	49,700 *	49,700 *	49,700 *	49,700 *	145
150	69.4	337.7	49,000 *	49,000 *	49,000 *	49,000 *	49,000 *	49,000 *	150
160	67.6	333.1	47,700 *	47,700 *	47,700 *	47,700 *	47,700 *	47,700 *	160
170	65.8	328.1	46,500 *	46,500 *	46,500 *	46,500 *	46,500 *	46,500 *	170
180	64.0	322.8	45,300 *	45,300 *	45,300 *	45,300 *	45,300 *	45,300 *	180
190	62.1	316.9	44,300 *	44,300 *	44,300 *	44,300 *	44,300 *	44,300 *	190
200	60.3	310.7	43,300 *	43,300 *	43,300 *	43,300 *	43,300 *	43,300 *	200
210	58.3	304.0	42,300 *	42,300 *	42,300 *	42,300 *	42,300 *	42,300 *	210
220	56.3	296.7	38,300	41,500 *	41,500 *	41,500 *	41,500 *	41,500 *	220
230	54.3	289.0	34,500	40,700 *	40,700 *	40,700 *	40,700 *	40,700 *	230
240	52.2	280.6	31,000	39,900 *	39,400	39,900 *	39,900 *	39,900 *	240
250	50.1	271.6	27,700	39,300 *	35,800	39,300 *	39,300 *	39,300 *	250
260	47.8	261.8	24,800	38,600 *	32,500	38,600 *	38,600 *	38,600 *	260
270	45.5	251.3	22,000	38,100 *	29,400	38,100 *	36,900	38,100 *	270
280	43.1	239.8	19,400	37,500 *	26,600	37,500 *	33,800	37,500 *	280




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

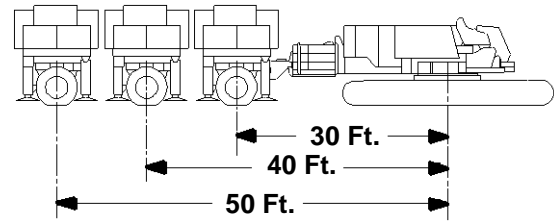

340 Ft. Boom

40 Ft. Jib, 30 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
85	80.8	379.8	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	85
90	80.1	378.7	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	90
95	79.3	377.5	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	95
100	78.5	376.2	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	100
105	77.7	374.9	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	105
110	76.9	373.5	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	110
115	76.2	372.0	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	115
120	75.4	370.4	54,500 *	54,500 *	54,500 *	54,500 *	54,500 *	54,500 *	120
125	74.6	368.8	53,700 *	53,700 *	53,700 *	53,700 *	53,700 *	53,700 *	125
130	73.8	367.1	52,900 *	52,900 *	52,900 *	52,900 *	52,900 *	52,900 *	130
135	73.0	365.3	52,100 *	52,100 *	52,100 *	52,100 *	52,100 *	52,100 *	135
140	72.1	363.4	51,400 *	51,400 *	51,400 *	51,400 *	51,400 *	51,400 *	140
145	71.3	361.5	50,700 *	50,700 *	50,700 *	50,700 *	50,700 *	50,700 *	145
150	70.5	359.5	50,000 *	50,000 *	50,000 *	50,000 *	50,000 *	50,000 *	150
160	68.9	355.1	48,700 *	48,700 *	48,700 *	48,700 *	48,700 *	48,700 *	160
170	67.2	350.5	47,500 *	47,500 *	47,500 *	47,500 *	47,500 *	47,500 *	170
180	65.5	345.4	46,300 *	46,300 *	46,300 *	46,300 *	46,300 *	46,300 *	180
190	63.8	340.0	45,200 *	45,200 *	45,200 *	45,200 *	45,200 *	45,200 *	190
200	62.0	334.2	44,200 *	44,200 *	44,200 *	44,200 *	44,200 *	44,200 *	200
210	60.2	328.0	41,900	43,300 *	43,300 *	43,300 *	43,300 *	43,300 *	210
220	58.4	321.3	37,700	42,400 *	42,400 *	42,400 *	42,400 *	42,400 *	220
230	56.6	314.2	33,900	41,600 *	41,600 *	41,600 *	41,600 *	41,600 *	230
240	54.6	306.5	30,400	40,800 *	38,800	40,800 *	40,800 *	40,800 *	240
250	52.7	298.3	27,200	40,100 *	35,200	40,100 *	40,100 *	40,100 *	250
260	50.7	289.5	24,200	39,500 *	31,900	39,500 *	39,500 *	39,500 *	260
270	48.6	280.1	21,500	38,900 *	28,900	38,900 *	36,400	38,900 *	270
280	46.4	269.9	18,900	38,300 *	26,000	38,300 *	33,200	38,300 *	280
290	44.2	258.9	16,500 *	35,100 *	23,400	37,800 *	30,300	37,800 *	290

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

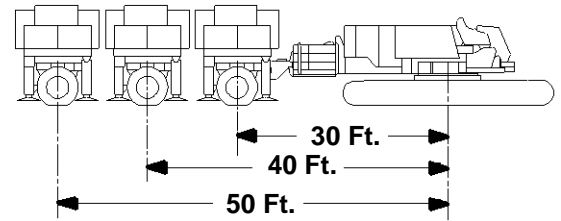

360 Ft. Boom
40 Ft. Jib, 30 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	40 Ft. Position	50 Ft. Position		Jib Oper. Rad. Feet
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
90	80.6	399.1	55,400 *	55,400 *	55,400 *	90
95	79.8	398.0	55,400 *	55,400 *	55,400 *	95
100	79.1	396.8	55,400 *	55,400 *	55,400 *	100
105	78.4	395.6	55,400 *	55,400 *	55,400 *	105
110	77.6	394.2	55,400 *	55,400 *	55,400 *	110
115	76.9	392.8	55,400 *	55,400 *	55,400 *	115
120	76.1	391.3	55,400 *	55,400 *	55,400 *	120
125	75.4	389.8	54,600 *	54,600 *	54,600 *	125
130	74.6	388.2	53,800 *	53,800 *	53,800 *	130
135	73.8	386.5	53,000 *	53,000 *	53,000 *	135
140	73.1	384.7	52,300 *	52,300 *	52,300 *	140
145	72.3	382.9	51,600 *	51,600 *	51,600 *	145
150	71.5	381.0	50,900 *	50,900 *	50,900 *	150
160	70.0	376.9	49,600 *	49,600 *	49,600 *	160
170	68.4	372.5	48,400 *	48,400 *	48,400 *	170
180	66.8	367.8	47,200 *	47,200 *	47,200 *	180
190	65.2	362.8	46,200 *	46,200 *	46,200 *	190
200	63.6	357.3	45,200 *	45,200 *	45,200 *	200
210	61.9	351.5	44,200 *	44,200 *	44,200 *	210
220	60.2	345.3	43,300 *	43,300 *	43,300 *	220
230	58.5	338.7	42,500 *	42,500 *	42,500 *	230
240	56.7	331.6	41,700 *	41,700 *	41,700 *	240
250	54.9	324.1	41,000 *	41,000 *	41,000 *	250
260	53.1	316.0	40,300 *	39,600 *	40,300 *	260
270	51.2	307.4	39,600 *	36,300 *	39,600 *	270
280	49.2	298.2	39,100 *	33,100 *	39,100 *	280
290	47.2	288.3	38,500 *	30,300 *	38,500 *	290
300	45.1	277.7	38,000 *	27,500 *	38,000 *	300

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

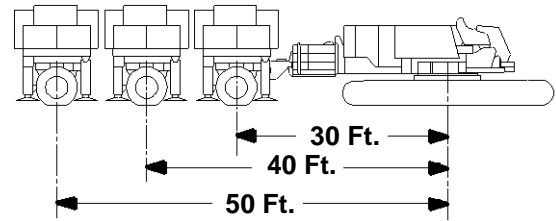

380 Ft. Boom 40 Ft. Jib, 30 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	50 Ft. Position
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds
90	81.0	419.6	55,400 *
95	80.3	418.5	55,400 *
100	79.6	417.4	55,400 *
105	78.9	416.2	55,400 *
110	78.2	414.9	55,400 *
115	77.5	413.6	55,400 *
120	76.8	412.2	55,400 *
125	76.1	410.7	55,400 *
130	75.4	409.2	54,600 *
135	74.7	407.6	53,900 *
140	73.9	405.9	53,100 *
145	73.2	404.2	52,400 *
150	72.5	402.4	51,800 *
160	71.0	398.5	50,500 *
170	69.5	394.4	49,200 *
180	68.0	389.9	48,100 *
190	66.5	385.2	47,000 *
200	65.0	380.1	46,000 *
210	63.4	374.6	45,100 *
220	61.8	368.8	44,200 *
230	60.2	362.6	43,300 *
240	58.6	356.1	42,500 *
250	56.9	349.0	41,800 *
260	55.2	341.6	41,100 *
270	53.4	333.7	40,400 *
280	51.6	325.2	39,800 *
290	49.8	316.2	39,200 *
300	47.9	306.6	38,700 *
310	45.9	296.3	38,200 *
320	43.9	285.2	37,800 *

400 Ft. Boom 40 Ft. Jib, 30 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	50 Ft. Position
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds
95	80.8	438.9	55,400 *
100	80.1	437.8	55,400 *
105	79.4	436.7	55,400 *
110	78.8	435.5	55,400 *
115	78.1	434.2	55,400 *
120	77.4	432.9	55,400 *
125	76.7	431.5	55,400 *
130	76.1	430.1	55,400 *
135	75.4	428.5	54,600 *
140	74.7	427.0	53,900 *
145	74.0	425.3	53,200 *
150	73.3	423.6	52,600 *
160	71.9	419.9	51,300 *
170	70.5	416.0	50,100 *
180	69.1	411.8	48,900 *
190	67.7	407.3	47,900 *
200	66.2	402.5	46,800 *
210	64.7	397.4	45,900 *
220	63.3	391.9	45,000 *
230	61.7	386.1	44,100 *
240	60.2	380.0	43,300 *
250	58.6	373.4	42,600 *
260	57.0	366.5	41,900 *
270	55.4	359.1	41,200 *
280	53.8	351.3	40,600 *
290	52.1	343.0	40,000 *
300	50.3	334.1	39,400 *
310	48.5	324.8	38,900 *
320	46.7	314.7	38,400 *
330	44.8	304.1	38,000 *

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

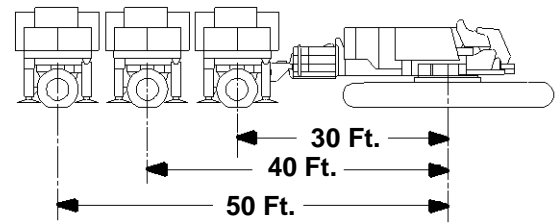

200 Ft. Boom
60 Ft. Jib, 5 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
55	80.7	267.4	76,300 *b	76,300 *b	76,300 *b	76,300 *b	76,300 *b	76,300 *b	55
60	79.6	266.4	75,200 *b	75,200 *b	75,200 *b	75,200 *b	75,200 *b	75,200 *b	60
65	78.5	265.3	74,100 *b	74,100 *b	74,100 *b	74,100 *b	74,100 *b	74,100 *b	65
70	77.4	264.0	73,100 *	73,100 *	73,100 *	73,100 *	73,100 *	73,100 *	70
75	76.2	262.7	72,100 *	72,100 *	72,100 *	72,100 *	72,100 *	72,100 *	75
80	75.1	261.3	71,100 *	71,100 *	71,100 *	71,100 *	71,100 *	71,100 *	80
85	73.9	259.7	70,200 *	70,200 *	70,200 *	70,200 *	70,200 *	70,200 *	85
90	72.8	258.1	69,300 *	69,300 *	69,300 *	69,300 *	69,300 *	69,300 *	90
95	71.6	256.3	68,400 *	68,400 *	68,400 *	68,400 *	68,400 *	68,400 *	95
100	70.5	254.4	67,600 *	67,600 *	67,600 *	67,600 *	67,600 *	67,600 *	100
105	69.3	252.4	66,800 *	66,800 *	66,800 *	66,800 *	66,800 *	66,800 *	105
110	68.1	250.3	66,000 *	66,000 *	66,000 *	66,000 *	66,000 *	66,000 *	110
115	66.9	248.1	65,300 *	65,300 *	65,300 *	65,300 *	65,300 *	65,300 *	115
120	65.7	245.7	64,600 *	64,600 *	64,600 *	64,600 *	64,600 *	64,600 *	120
125	64.5	243.2	63,900 *	63,900 *	63,900 *	63,900 *	63,900 *	63,900 *	125
130	63.2	240.5	63,200 *	63,200 *	63,200 *	63,200 *	63,200 *	63,200 *	130
135	62.0	237.8	62,600 *	62,600 *	62,600 *	62,600 *	62,600 *	62,600 *	135
140	60.7	234.8	62,000 *	62,000 *	62,000 *	62,000 *	62,000 *	62,000 *	140
145	59.4	231.7	60,900 *	60,900 *	60,900 *	60,900 *	60,900 *	60,900 *	145
150	58.1	228.5	59,000 *	59,000 *	59,000 *	59,000 *	59,000 *	59,000 *	150
160	55.5	221.5	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	160
170	52.7	213.8	52,300 *	52,300 *	52,300 *	52,300 *	52,300 *	52,300 *	170
180	49.8	205.3	49,500 *	49,500 *	49,500 *	49,500 *	49,500 *	49,500 *	180
190	46.8	195.9	46,900 *	46,900 *	46,900 *	46,900 *	46,900 *	46,900 *	190
200	43.6	185.4	44,600 *	44,600 *	44,600 *	44,600 *	44,600 *	44,600 *	200
210	40.3	173.5	42,600 *	42,600 *	42,600 *	42,600 *	42,600 *	42,600 *	210
220	36.6	160.2	40,700 *	40,700 *	40,700 *	40,700 *	40,700 *	40,700 *	220
230	32.6	144.7	39,000 *	39,000 *	39,000 *	39,000 *	39,000 *	39,000 *	230
240	28.0	126.4	37,400 *	37,400 *	37,400 *	37,400 *	37,400 *	37,400 *	240
250	22.5	103.5	36,000 *	36,000 *	36,000 *	36,000 *	36,000 *	36,000 *	250




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

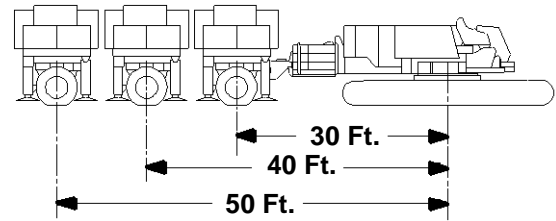

220 Ft. Boom
60 Ft. Jib, 5 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
60	80.4	286.8	75,500 *b	75,500 *b	75,500 *b	75,500 *b	75,500 *b	75,500 *b	60
65	79.3	285.8	74,500 *b	74,500 *b	74,500 *b	74,500 *b	74,500 *b	74,500 *b	65
70	78.3	284.6	73,500 *b	73,500 *b	73,500 *b	73,500 *b	73,500 *b	73,500 *b	70
75	77.2	283.4	72,500 *	72,500 *	72,500 *	72,500 *	72,500 *	72,500 *	75
80	76.2	282.1	71,600 *	71,600 *	71,600 *	71,600 *	71,600 *	71,600 *	80
85	75.1	280.6	70,800 *	70,800 *	70,800 *	70,800 *	70,800 *	70,800 *	85
90	74.1	279.1	69,900 *	69,900 *	69,900 *	69,900 *	69,900 *	69,900 *	90
95	73.0	277.5	69,100 *	69,100 *	69,100 *	69,100 *	69,100 *	69,100 *	95
100	71.9	275.8	68,300 *	68,300 *	68,300 *	68,300 *	68,300 *	68,300 *	100
105	70.8	273.9	67,500 *	67,500 *	67,500 *	67,500 *	67,500 *	67,500 *	105
110	69.7	272.0	66,800 *	66,800 *	66,800 *	66,800 *	66,800 *	66,800 *	110
115	68.6	269.9	66,100 *	66,100 *	66,100 *	66,100 *	66,100 *	66,100 *	115
120	67.5	267.7	65,400 *	65,400 *	65,400 *	65,400 *	65,400 *	65,400 *	120
125	66.4	265.5	64,700 *	64,700 *	64,700 *	64,700 *	64,700 *	64,700 *	125
130	65.3	263.0	64,100 *	64,100 *	64,100 *	64,100 *	64,100 *	64,100 *	130
135	64.2	260.5	63,500 *	63,500 *	63,500 *	63,500 *	63,500 *	63,500 *	135
140	63.0	257.9	62,900 *	62,900 *	62,900 *	62,900 *	62,900 *	62,900 *	140
145	61.8	255.1	62,300 *	62,300 *	62,300 *	62,300 *	62,300 *	62,300 *	145
150	60.7	252.1	61,800 *	61,800 *	61,800 *	61,800 *	61,800 *	61,800 *	150
160	58.3	245.9	59,200 *	59,200 *	59,200 *	59,200 *	59,200 *	59,200 *	160
170	55.8	239.0	55,800 *	55,800 *	55,800 *	55,800 *	55,800 *	55,800 *	170
180	53.2	231.4	52,900 *	52,900 *	52,900 *	52,900 *	52,900 *	52,900 *	180
190	50.6	223.2	50,200 *	50,200 *	50,200 *	50,200 *	50,200 *	50,200 *	190
200	47.9	214.0	47,800 *	47,800 *	47,800 *	47,800 *	47,800 *	47,800 *	200
210	45.0	204.0	45,600 *	45,600 *	45,600 *	45,600 *	45,600 *	45,600 *	210
220	41.9	192.8	43,600 *	43,600 *	43,600 *	43,600 *	43,600 *	43,600 *	220
230	38.7	180.4	41,700 *	41,700 *	41,700 *	41,700 *	41,700 *	41,700 *	230
240	35.2	166.3	38,400	40,000 *	40,000 *	40,000 *	40,000 *	40,000 *	240
250	31.3	150.1	35,300	38,500 *	38,500 *	38,500 *	38,500 *	38,500 *	250
260	26.9	130.9	32,400	37,100 *	37,100 *	37,100 *	37,100 *	37,100 *	260
270	21.7	107.0	29,700	35,900 *	35,900 *	35,900 *	35,900 *	35,900 *	270




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

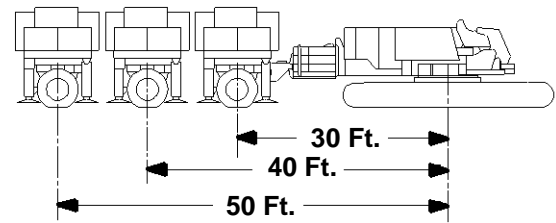

240 Ft. Boom
60 Ft. Jib, 5 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
60	81.0	307.2	75,600 *b	75,600 *b	75,600 *b	75,600 *b	75,600 *b	75,600 *b	60
65	80.0	306.2	74,700 *b	74,700 *b	74,700 *b	74,700 *b	74,700 *b	74,700 *b	65
70	79.1	305.1	73,700 *b	73,700 *b	73,700 *b	73,700 *b	73,700 *b	73,700 *b	70
75	78.1	304.0	72,900 *	72,900 *	72,900 *	72,900 *	72,900 *	72,900 *	75
80	77.1	302.8	72,000 *	72,000 *	72,000 *	72,000 *	72,000 *	72,000 *	80
85	76.1	301.4	71,200 *	71,200 *	71,200 *	71,200 *	71,200 *	71,200 *	85
90	75.1	300.0	70,400 *	70,400 *	70,400 *	70,400 *	70,400 *	70,400 *	90
95	74.2	298.5	69,600 *	69,600 *	69,600 *	69,600 *	69,600 *	69,600 *	95
100	73.2	296.9	68,800 *	68,800 *	68,800 *	68,800 *	68,800 *	68,800 *	100
105	72.2	295.2	68,100 *	68,100 *	68,100 *	68,100 *	68,100 *	68,100 *	105
110	71.1	293.4	67,400 *	67,400 *	67,400 *	67,400 *	67,400 *	67,400 *	110
115	70.1	291.5	66,800 *	66,800 *	66,800 *	66,800 *	66,800 *	66,800 *	115
120	69.1	289.5	66,100 *	66,100 *	66,100 *	66,100 *	66,100 *	66,100 *	120
125	68.1	287.4	65,400 *	65,400 *	65,400 *	65,400 *	65,400 *	65,400 *	125
130	67.0	285.2	64,800 *	64,800 *	64,800 *	64,800 *	64,800 *	64,800 *	130
135	66.0	282.8	64,200 *	64,200 *	64,200 *	64,200 *	64,200 *	64,200 *	135
140	64.9	280.4	63,600 *	63,600 *	63,600 *	63,600 *	63,600 *	63,600 *	140
145	63.9	277.8	63,100 *	63,100 *	63,100 *	63,100 *	63,100 *	63,100 *	145
150	62.8	275.2	62,500 *	62,500 *	62,500 *	62,500 *	62,500 *	62,500 *	150
160	60.6	269.5	61,500 *	61,500 *	61,500 *	61,500 *	61,500 *	61,500 *	160
170	58.4	263.2	59,300 *	59,300 *	59,300 *	59,300 *	59,300 *	59,300 *	170
180	56.1	256.4	56,200 *	56,200 *	56,200 *	56,200 *	56,200 *	56,200 *	180
190	53.7	249.0	53,400 *	53,400 *	53,400 *	53,400 *	53,400 *	53,400 *	190
200	51.3	240.9	50,800 *	50,800 *	50,800 *	50,800 *	50,800 *	50,800 *	200
210	48.8	232.1	47,100 *	48,500 *	48,500 *	48,500 *	48,500 *	48,500 *	210
220	46.1	222.4	43,100 *	46,400 *	46,400 *	46,400 *	46,400 *	46,400 *	220
230	43.3	211.8	39,400 *	44,400 *	44,400 *	44,400 *	44,400 *	44,400 *	230
240	40.4	200.0	36,000 *	42,700 *	42,700 *	42,700 *	42,700 *	42,700 *	240
250	37.3	187.0	32,900 *	41,000 *	41,000 *	41,000 *	41,000 *	41,000 *	250
260	33.9	172.2	30,100 *	39,500 *	37,800 *	39,500 *	39,500 *	39,500 *	260
270	30.2	155.3	27,400 *	38,100 *	34,800 *	38,100 *	38,100 *	38,100 *	270
280	25.9	135.3	24,900 *	36,900 *	32,100 *	36,900 *	36,900 *	36,900 *	280




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

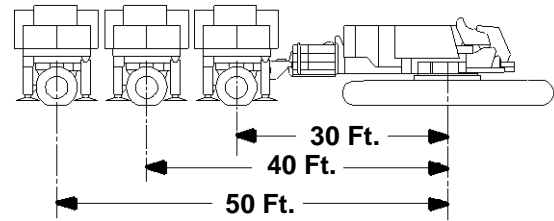

260 Ft. Boom
60 Ft. Jib, 5 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
65	80.7	326.6	74,500 *b	74,500 *b	74,500 *b	74,500 *b	74,500 *b	74,500 *b	65
70	79.8	325.6	73,700 *b	73,700 *b	73,700 *b	73,700 *b	73,700 *b	73,700 *b	70
75	78.8	324.5	72,900 *b	72,900 *b	72,900 *b	72,900 *b	72,900 *b	72,900 *b	75
80	77.9	323.4	72,100 *	72,100 *	72,100 *	72,100 *	72,100 *	72,100 *	80
85	77.0	322.1	71,300 *	71,300 *	71,300 *	71,300 *	71,300 *	71,300 *	85
90	76.1	320.8	70,500 *	70,500 *	70,500 *	70,500 *	70,500 *	70,500 *	90
95	75.2	319.4	69,800 *	69,800 *	69,800 *	69,800 *	69,800 *	69,800 *	95
100	74.2	317.9	69,100 *	69,100 *	69,100 *	69,100 *	69,100 *	69,100 *	100
105	73.3	316.3	68,500 *	68,500 *	68,500 *	68,500 *	68,500 *	68,500 *	105
110	72.4	314.6	67,800 *	67,800 *	67,800 *	67,800 *	67,800 *	67,800 *	110
115	71.4	312.9	67,100 *	67,100 *	67,100 *	67,100 *	67,100 *	67,100 *	115
120	70.5	311.0	66,500 *	66,500 *	66,500 *	66,500 *	66,500 *	66,500 *	120
125	69.5	309.0	65,900 *	65,900 *	65,900 *	65,900 *	65,900 *	65,900 *	125
130	68.6	307.0	65,300 *	65,300 *	65,300 *	65,300 *	65,300 *	65,300 *	130
135	67.6	304.8	64,700 *	64,700 *	64,700 *	64,700 *	64,700 *	64,700 *	135
140	66.6	302.6	64,100 *	64,100 *	64,100 *	64,100 *	64,100 *	64,100 *	140
145	65.6	300.2	63,600 *	63,600 *	63,600 *	63,600 *	63,600 *	63,600 *	145
150	64.6	297.8	63,100 *	63,100 *	63,100 *	63,100 *	63,100 *	63,100 *	150
160	62.6	292.5	62,100 *	62,100 *	62,100 *	62,100 *	62,100 *	62,100 *	160
170	60.6	286.8	61,200 *	61,200 *	61,200 *	61,200 *	61,200 *	61,200 *	170
180	58.5	280.6	59,700 *	59,700 *	59,700 *	59,700 *	59,700 *	59,700 *	180
190	56.3	273.8	55,900	56,700 *	56,700 *	56,700 *	56,700 *	56,700 *	190
200	54.1	266.5	51,000	54,000 *	54,000 *	54,000 *	54,000 *	54,000 *	200
210	51.9	258.6	46,500	51,600 *	51,600 *	51,600 *	51,600 *	51,600 *	210
220	49.5	250.0	42,500	49,300 *	49,300 *	49,300 *	49,300 *	49,300 *	220
230	47.1	240.7	38,800	47,300 *	47,300 *	47,300 *	47,300 *	47,300 *	230
240	44.5	230.5	35,400	45,400 *	43,800	45,400 *	45,400 *	45,400 *	240
250	41.9	219.3	32,300	43,600 *	40,400	43,600 *	43,600 *	43,600 *	250
260	39.0	207.0	29,500	39,100 *	37,200	39,100 *	39,100 *	39,100 *	260
270	36.0	193.3	26,800	32,000 *	32,000 *	32,000 *	32,000 *	32,000 *	270
280	32.8	177.9	24,400	25,500 *	25,500 *	25,500 *	25,500 *	25,500 *	280
290	29.2	160.3	19,700 *	19,700 *	19,700 *	19,700 *	19,700 *	19,700 *	290
300	25.1	139.6	14,300 *	14,300 *	14,300 *	14,300 *	14,300 *	14,300 *	300

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

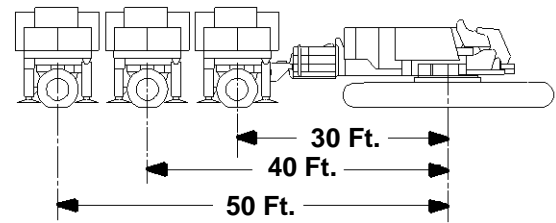

280 Ft. Boom
60 Ft. Jib, 5 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
70	80.7	345.8	72,200 *b	72,200 *b	72,200 *b	72,200 *b	72,200 *b	72,200 *b	70
75	79.8	344.8	71,400 *b	71,400 *b	71,400 *b	71,400 *b	71,400 *b	71,400 *b	75
80	79.0	343.7	70,800 *b	70,800 *b	70,800 *b	70,800 *b	70,800 *b	70,800 *b	80
85	78.1	342.5	70,100 *	70,100 *	70,100 *	70,100 *	70,100 *	70,100 *	85
90	77.2	341.3	69,400 *	69,400 *	69,400 *	69,400 *	69,400 *	69,400 *	90
95	76.4	340.0	68,800 *	68,800 *	68,800 *	68,800 *	68,800 *	68,800 *	95
100	75.5	338.5	68,200 *	68,200 *	68,200 *	68,200 *	68,200 *	68,200 *	100
105	74.6	337.1	67,600 *	67,600 *	67,600 *	67,600 *	67,600 *	67,600 *	105
110	73.8	335.5	67,000 *	67,000 *	67,000 *	67,000 *	67,000 *	67,000 *	110
115	72.9	333.8	66,400 *	66,400 *	66,400 *	66,400 *	66,400 *	66,400 *	115
120	72.0	332.1	65,900 *	65,900 *	65,900 *	65,900 *	65,900 *	65,900 *	120
125	71.1	330.3	65,300 *	65,300 *	65,300 *	65,300 *	65,300 *	65,300 *	125
130	70.2	328.4	64,800 *	64,800 *	64,800 *	64,800 *	64,800 *	64,800 *	130
135	69.3	326.3	64,300 *	64,300 *	64,300 *	64,300 *	64,300 *	64,300 *	135
140	68.4	324.2	63,800 *	63,800 *	63,800 *	63,800 *	63,800 *	63,800 *	140
145	67.5	322.1	63,300 *	63,300 *	63,300 *	63,300 *	63,300 *	63,300 *	145
150	66.5	319.8	62,800 *	62,800 *	62,800 *	62,800 *	62,800 *	62,800 *	150
160	64.7	314.9	61,900 *	61,900 *	61,900 *	61,900 *	61,900 *	61,900 *	160
170	62.8	309.6	61,000 *	61,000 *	61,000 *	61,000 *	61,000 *	61,000 *	170
180	60.9	303.9	60,300 *	60,300 *	60,300 *	60,300 *	60,300 *	60,300 *	180
190	58.9	297.7	56,100	59,500 *	59,500 *	59,500 *	59,500 *	59,500 *	190
200	56.9	291.0	51,100	58,800 *	58,800 *	58,800 *	58,800 *	58,800 *	200
210	54.8	283.8	46,600	57,700 *	56,300	57,700 *	57,700 *	57,700 *	210
220	52.7	276.0	42,600	55,300 *	51,800	55,300 *	55,300 *	55,300 *	220
230	50.5	267.6	38,900	53,000 *	47,700	53,000 *	53,000 *	53,000 *	230
240	48.2	258.5	35,500	51,000 *	43,900	51,000 *	51,000 *	51,000 *	240
250	45.9	248.7	32,400	49,100 *	40,400	49,100 *	48,600	49,100 *	250
260	43.4	237.9	29,500	47,300 *	37,300	47,300 *	45,000	47,300 *	260
270	40.8	226.2	26,900	45,700 *	34,300	45,700 *	41,800	45,700 *	270
280	38.1	213.4	24,400	42,400 *	31,600	44,200 *	38,800	44,200 *	280
290	35.2	199.1	22,100	38,100 *	29,000	42,900 *	35,900	42,900 *	290
300	32.0	183.1	20,000	34,100 *	26,600	41,600 *	33,300	41,600 *	300
310	28.5	164.7	17,900	30,300 *	24,300	40,400 *	30,800	40,400 *	310
320	24.5	143.2	16,000	26,500 *	22,200	39,400 *	28,500	39,400 *	320




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
 ANSI B30.5
 Requirements

MAX-ER 2000 On 2250

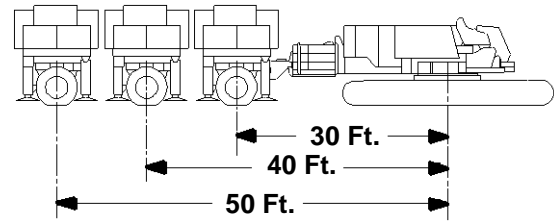

**300 Ft. Boom
 60 Ft. Jib, 5 Degree Offset**


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
75	80.4	365.2	71,100 *b	71,100 *b	71,100 *b	71,100 *b	71,100 *b	71,100 *b	75
80	79.6	364.1	70,400 *b	70,400 *b	70,400 *b	70,400 *b	70,400 *b	70,400 *b	80
85	78.8	363.0	69,900 *	69,900 *	69,900 *	69,900 *	69,900 *	69,900 *	85
90	78.0	361.9	69,300 *	69,300 *	69,300 *	69,300 *	69,300 *	69,300 *	90
95	77.2	360.6	68,700 *	68,700 *	68,700 *	68,700 *	68,700 *	68,700 *	95
100	76.3	359.3	68,100 *	68,100 *	68,100 *	68,100 *	68,100 *	68,100 *	100
105	75.5	357.9	67,500 *	67,500 *	67,500 *	67,500 *	67,500 *	67,500 *	105
110	74.7	356.4	67,000 *	67,000 *	67,000 *	67,000 *	67,000 *	67,000 *	110
115	73.9	354.9	66,500 *	66,500 *	66,500 *	66,500 *	66,500 *	66,500 *	115
120	73.0	353.3	65,900 *	65,900 *	65,900 *	65,900 *	65,900 *	65,900 *	120
125	72.2	351.5	65,400 *	65,400 *	65,400 *	65,400 *	65,400 *	65,400 *	125
130	71.3	349.7	64,900 *	64,900 *	64,900 *	64,900 *	64,900 *	64,900 *	130
135	70.5	347.9	64,400 *	64,400 *	64,400 *	64,400 *	64,400 *	64,400 *	135
140	69.6	345.9	64,000 *	64,000 *	64,000 *	64,000 *	64,000 *	64,000 *	140
145	68.8	343.8	63,500 *	63,500 *	63,500 *	63,500 *	63,500 *	63,500 *	145
150	67.9	341.7	63,100 *	63,100 *	63,100 *	63,100 *	63,100 *	63,100 *	150
160	66.2	337.2	62,200 *	62,200 *	62,200 *	62,200 *	62,200 *	62,200 *	160
170	64.4	332.2	61,400 *	61,400 *	61,400 *	61,400 *	61,400 *	61,400 *	170
180	62.6	326.9	60,600 *	60,600 *	60,600 *	60,600 *	60,600 *	60,600 *	180
190	60.8	321.2	55,300	59,900 *	59,900 *	59,900 *	59,900 *	59,900 *	190
200	58.9	315.0	50,400	59,200 *	59,200 *	59,200 *	59,200 *	59,200 *	200
210	57.0	308.4	45,900	58,600 *	55,600	58,600 *	58,600 *	58,600 *	210
220	55.1	301.3	41,800	57,900 *	51,000	57,900 *	57,900 *	57,900 *	220
230	53.1	293.6	38,200	55,700 *	46,900	55,700 *	55,700 *	55,700 *	230
240	51.1	285.4	34,800	53,600 *	43,200	53,600 *	51,600	53,600 *	240
250	48.9	276.5	31,700	51,600 *	39,700	51,600 *	47,800	51,600 *	250
260	46.8	267.0	28,800	49,800 *	36,500	49,800 *	44,300	49,800 *	260
270	44.5	256.6	26,200	47,600 *	33,600	48,100 *	41,100	48,100 *	270
280	42.1	245.4	23,700	43,400 *	30,800	46,500 *	38,000	46,500 *	280
290	39.6	233.2	21,400	39,200 *	28,300	45,000 *	35,200	45,000 *	290
300	36.9	219.8	19,300	35,200 *	25,900	43,700 *	32,600	43,700 *	300
310	34.1	205.0	17,200	31,400 *	23,700	42,400 *	30,100	42,400 *	310
320	31.0	188.4	15,300	27,800 *	21,500	41,300 *	27,800	41,300 *	320
330	27.7	169.4	13,500	24,400 *	19,600	38,100 *	25,600	40,200 *	330
340	23.8	147.2	11,500 *	21,000 *	17,700	34,200 *	23,500	36,600 *	340

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

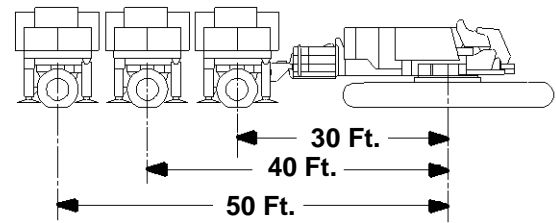

320 Ft. Boom
60 Ft. Jib, 5 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
75	80.9	385.5	71,000 *b	71,000 *b	71,000 *b	71,000 *b	71,000 *b	71,000 *b	75
80	80.1	384.5	70,500 *b	70,500 *b	70,500 *b	70,500 *b	70,500 *b	70,500 *b	80
85	79.4	383.5	69,900 *b	69,900 *b	69,900 *b	69,900 *b	69,900 *b	69,900 *b	85
90	78.6	382.4	69,300 *	69,300 *	69,300 *	69,300 *	69,300 *	69,300 *	90
95	77.8	381.2	68,700 *	68,700 *	68,700 *	68,700 *	68,700 *	68,700 *	95
100	77.1	380.0	68,200 *	68,200 *	68,200 *	68,200 *	68,200 *	68,200 *	100
105	76.3	378.7	67,700 *	67,700 *	67,700 *	67,700 *	67,700 *	67,700 *	105
110	75.5	377.3	67,100 *	67,100 *	67,100 *	67,100 *	67,100 *	67,100 *	110
115	74.7	375.8	66,600 *	66,600 *	66,600 *	66,600 *	66,600 *	66,600 *	115
120	73.9	374.3	66,100 *	66,100 *	66,100 *	66,100 *	66,100 *	66,100 *	120
125	73.2	372.7	65,700 *	65,700 *	65,700 *	65,700 *	65,700 *	65,700 *	125
130	72.4	371.0	65,200 *	65,200 *	65,200 *	65,200 *	65,200 *	65,200 *	130
135	71.6	369.2	64,700 *	64,700 *	64,700 *	64,700 *	64,700 *	64,700 *	135
140	70.8	367.4	64,300 *	64,300 *	64,300 *	64,300 *	64,300 *	64,300 *	140
145	70.0	365.4	63,800 *	63,800 *	63,800 *	63,800 *	63,800 *	63,800 *	145
150	69.2	363.4	63,400 *	63,400 *	63,400 *	63,400 *	63,400 *	63,400 *	150
160	67.5	359.1	62,600 *	62,600 *	62,600 *	62,600 *	62,600 *	62,600 *	160
170	65.9	354.5	61,800 *	61,800 *	61,800 *	61,800 *	61,800 *	61,800 *	170
180	64.2	349.6	57,600 *	61,000 *	61,000 *	61,000 *	61,000 *	61,000 *	180
190	62.5	344.2	52,000 *	60,300 *	60,300 *	60,300 *	60,300 *	60,300 *	190
200	60.8	338.5	47,100 *	59,600 *	57,200 *	59,600 *	59,600 *	59,600 *	200
210	59.0	332.3	42,600 *	59,000 *	52,200 *	59,000 *	59,000 *	59,000 *	210
220	57.2	325.8	38,500 *	58,400 *	47,700 *	58,400 *	57,000 *	58,400 *	220
230	55.4	318.7	34,800 *	57,800 *	43,600 *	57,800 *	52,400 *	57,800 *	230
240	53.5	311.2	31,400 *	54,800 *	39,800 *	56,100 *	48,300 *	56,100 *	240
250	51.6	303.1	28,300 *	50,900 *	36,300 *	54,100 *	44,400 *	54,100 *	250
260	49.6	294.4	25,400 *	47,300 *	33,100 *	52,200 *	40,900 *	52,200 *	260
270	47.5	285.2	22,800 *	44,000 *	30,200 *	50,400 *	37,700 *	50,400 *	270
280	45.4	275.2	20,300 *	40,600 *	27,400 *	48,700 *	34,600 *	48,700 *	280
290	43.2	264.4	18,000 *	36,400 *	24,900 *	47,200 *	31,800 *	47,200 *	290
300	40.9	252.7	15,900 *	32,400 *	22,500 *	45,800 *	29,200 *	45,800 *	300
310	38.5	240.0	13,500 *	28,600 *	20,300 *	44,000 *	26,700 *	44,400 *	310
320	35.9	226.1	11,200 *	25,100 *	18,200 *	39,800 *	24,400 *	43,200 *	320
330	33.1	210.8	9,000 *	21,700 *	16,200 *	35,800 *	22,300 *	42,000 *	330
340	30.2	193.6	6,900 *	18,500 *	14,300 *	32,000 *	20,200 *	41,000 *	340
350	26.9	174.0	5,000 *	15,400 *	12,200 *	28,400 *	18,200 *	40,000 *	350
360	23.1	151.0		12,300 *	10,200 *	24,700 *	16,400 *	36,500 *	360




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

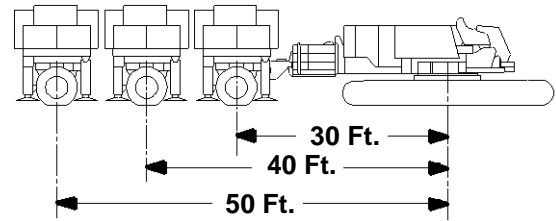

340 Ft. Boom
60 Ft. Jib, 5 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position	40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
80	80.6	404.9	69,900 *b	69,900 *b	69,900 *b	69,900 *b	69,900 *b	80
85	79.9	403.9	69,400 *b	69,400 *b	69,400 *b	69,400 *b	69,400 *b	85
90	79.2	402.9	68,800 *b	68,800 *b	68,800 *b	68,800 *b	68,800 *b	90
95	78.5	401.8	68,300 *	68,300 *	68,300 *	68,300 *	68,300 *	95
100	77.7	400.6	67,800 *	67,800 *	67,800 *	67,800 *	67,800 *	100
105	77.0	399.3	67,300 *	67,300 *	67,300 *	67,300 *	67,300 *	105
110	76.3	398.0	66,800 *	66,800 *	66,800 *	66,800 *	66,800 *	110
115	75.5	396.6	66,400 *	66,400 *	66,400 *	66,400 *	66,400 *	115
120	74.8	395.2	65,900 *	65,900 *	65,900 *	65,900 *	65,900 *	120
125	74.0	393.7	65,500 *	65,500 *	65,500 *	65,500 *	65,500 *	125
130	73.3	392.1	65,000 *	65,000 *	65,000 *	65,000 *	65,000 *	130
135	72.5	390.4	64,600 *	64,600 *	64,600 *	64,600 *	64,600 *	135
140	71.8	388.6	64,200 *	64,200 *	64,200 *	64,200 *	64,200 *	140
145	71.0	386.8	63,800 *	63,800 *	63,800 *	63,800 *	63,800 *	145
150	70.2	384.9	63,400 *	63,400 *	63,400 *	63,400 *	63,400 *	150
160	68.7	380.9	62,600 *	62,600 *	62,600 *	62,600 *	62,600 *	160
170	67.2	376.6	61,800 *	61,800 *	61,800 *	61,800 *	61,800 *	170
180	65.6	371.9	61,100 *	61,100 *	61,100 *	61,100 *	61,100 *	180
190	64.0	366.9	60,400 *	60,400 *	60,400 *	60,400 *	60,400 *	190
200	62.4	361.5	59,800 *	56,500 *	59,800 *	59,800 *	59,800 *	200
210	60.7	355.8	59,200 *	51,500 *	59,200 *	59,200 *	59,200 *	210
220	59.1	349.7	58,600 *	46,900 *	58,600 *	56,200 *	58,600 *	220
230	57.4	343.1	58,000 *	42,800 *	58,000 *	51,700 *	58,000 *	230
240	55.6	336.2	53,900 *	39,100 *	57,500 *	47,500 *	57,500 *	240
250	53.8	328.7	50,100 *	35,600 *	56,500 *	43,700 *	56,500 *	250
260	52.0	320.8	46,500 *	32,400 *	54,500 *	40,200 *	54,500 *	260
270	50.1	312.3	43,200 *	29,400 *	52,700 *	36,900 *	52,700 *	270
280	48.2	303.2	40,100 *	26,700 *	51,000 *	33,900 *	51,000 *	280
290	46.2	293.5	37,000 *	24,200 *	49,300 *	31,100 *	49,400 *	290
300	44.2	283.1	33,000 *	21,800 *	46,200 *	28,500 *	47,900 *	300
310	42.0	271.9	29,200 *	19,500 *	43,300 *	26,000 *	46,400 *	310
320	39.8	259.8	25,700 *	17,500 *	40,600 *	23,700 *	45,100 *	320
330	37.4	246.6	22,400 *	15,500 *	36,800 *	21,600 *	43,900 *	330
340	34.9	232.2	19,200 *	13,400 *	33,100 *	19,500 *	42,800 *	340
350	32.3	216.3	16,200 *	11,300 *	29,500 *	17,600 *	40,300 *	350
360	29.4	198.6	13,300 *	9,200 *	26,100 *	15,700 *	36,200 *	360
370	26.1	178.4	10,400 *	7,300 *	22,700 *	14,000 *	32,200 *	370

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

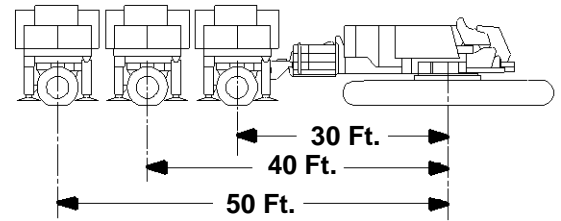

360 Ft. Boom
60 Ft. Jib, 5 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	40 Ft. Position	50 Ft. Position		Jib Oper. Rad. Feet
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
85	80.4	424.3	68,400 *b	68,400 *b	68,400 *b	85
90	79.7	423.3	68,000 *b	68,000 *b	68,000 *b	90
95	79.0	422.3	67,500 *b	67,500 *b	67,500 *b	95
100	78.3	421.1	67,100 *	67,100 *	67,100 *	100
105	77.6	420.0	66,600 *	66,600 *	66,600 *	105
110	76.9	418.7	66,200 *	66,200 *	66,200 *	110
115	76.2	417.4	65,700 *	65,700 *	65,700 *	115
120	75.5	416.0	65,300 *	65,300 *	65,300 *	120
125	74.8	414.6	64,900 *	64,900 *	64,900 *	125
130	74.1	413.0	64,500 *	64,500 *	64,500 *	130
135	73.4	411.5	64,100 *	64,100 *	64,100 *	135
140	72.7	409.8	63,700 *	63,700 *	63,700 *	140
145	72.0	408.1	63,400 *	63,400 *	63,400 *	145
150	71.2	406.3	63,000 *	63,000 *	63,000 *	150
160	69.8	402.5	62,300 *	62,300 *	62,300 *	160
170	68.3	398.4	61,600 *	61,600 *	61,600 *	170
180	66.8	394.0	60,900 *	60,900 *	60,900 *	180
190	65.3	389.3	60,200 *	60,200 *	60,200 *	190
200	63.8	384.2	59,600 *	59,600 *	59,600 *	200
210	62.3	378.9	59,000 *	59,000 *	59,000 *	210
220	60.7	373.1	58,400 *	55,900	58,400 *	220
230	59.1	367.0	57,900 *	51,400	57,900 *	230
240	57.5	360.5	57,400 *	47,200	57,400 *	240
250	55.8	353.6	56,900 *	43,400	56,900 *	250
260	54.1	346.2	56,500 *	39,900	56,500 *	260
270	52.4	338.4	55,000 *	36,700	55,000 *	270
280	50.6	330.1	52,300 *	33,600	53,200 *	280
290	48.8	321.2	49,000 *	30,800	51,500 *	290
300	47.0	311.8	45,900 *	28,200	49,900 *	300
310	45.0	301.6	43,000 *	25,800	48,500 *	310
320	43.0	290.8	40,200 *	23,500	47,100 *	320
330	40.9	279.2	37,700 *	21,300	45,800 *	330
340	38.8	266.6	34,400 *	19,300	44,600 *	340
350	36.5	253.0	30,900 *	17,300	40,500 *	350
360	34.0	238.2	27,500 *	15,500	36,300 *	360
370	31.4	221.8	24,300 *	13,800 *	32,000 *	370
380	28.6	203.5	21,200 *	11,800 *	27,900 *	380
390	25.5	182.7	18,200 *	9,900 *	23,900 *	390




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

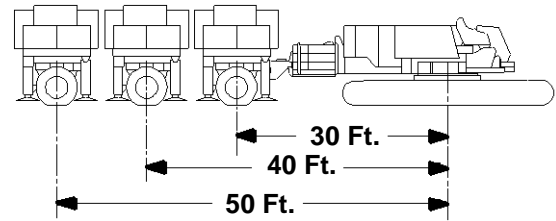

380 Ft. Boom 60 Ft. Jib, 5 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	50 Ft. Position
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds
85	80.8	444.7	67,500 *b
90	80.2	443.7	67,100 *b
95	79.5	442.7	66,700 *b
100	78.9	441.6	66,300 *b
105	78.2	440.5	65,900 *
110	77.5	439.3	65,500 *
115	76.9	438.1	65,100 *
120	76.2	436.8	64,700 *
125	75.5	435.4	64,300 *
130	74.8	433.9	64,000 *
135	74.2	432.4	63,600 *
140	73.5	430.9	63,200 *
145	72.8	429.2	62,900 *
150	72.1	427.5	62,500 *
160	70.7	423.9	61,800 *
170	69.3	420.0	61,200 *
180	67.9	415.9	60,500 *
190	66.5	411.4	59,900 *
200	65.1	406.6	59,300 *
210	63.6	401.6	58,800 *
220	62.2	396.2	58,300 *
230	60.7	390.4	57,700 *
240	59.1	384.3	57,300 *
250	57.6	377.9	56,800 *
260	56.0	371.0	56,400 *
270	54.4	363.7	56,000 *
280	52.8	356.0	55,400 *
290	51.1	347.8	53,600 *
300	49.4	339.1	52,000 *
310	47.6	329.9	50,500 *
320	45.8	320.1	49,000 *
330	43.9	309.6	47,500 *
340	42.0	298.3	44,200 *
350	39.9	286.3	39,800 *
360	37.8	273.3	35,400 *
370	35.6	259.3	31,200 *
380	33.2	243.9	27,200 *
390	30.7	227.1	23,400 *
400	27.9	208.3	19,800 *
410	24.8	187.0	16,200 *

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

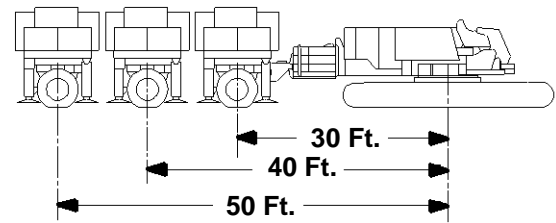

200 Ft. Boom
60 Ft. Jib, 15 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
70	79.9	262.1	62,300 *	62,300 *	62,300 *	62,300 *	62,300 *	62,300 *	70
75	78.8	260.7	60,000 *	60,000 *	60,000 *	60,000 *	60,000 *	60,000 *	75
80	77.6	259.3	57,800 *	57,800 *	57,800 *	57,800 *	57,800 *	57,800 *	80
85	76.5	257.7	55,800 *	55,800 *	55,800 *	55,800 *	55,800 *	55,800 *	85
90	75.3	256.0	53,900 *	53,900 *	53,900 *	53,900 *	53,900 *	53,900 *	90
95	74.2	254.3	52,100 *	52,100 *	52,100 *	52,100 *	52,100 *	52,100 *	95
100	73.0	252.4	50,400 *	50,400 *	50,400 *	50,400 *	50,400 *	50,400 *	100
105	71.8	250.3	48,900 *	48,900 *	48,900 *	48,900 *	48,900 *	48,900 *	105
110	70.6	248.2	47,400 *	47,400 *	47,400 *	47,400 *	47,400 *	47,400 *	110
115	69.4	245.9	46,100 *	46,100 *	46,100 *	46,100 *	46,100 *	46,100 *	115
120	68.2	243.5	44,800 *	44,800 *	44,800 *	44,800 *	44,800 *	44,800 *	120
125	66.9	241.0	43,600 *	43,600 *	43,600 *	43,600 *	43,600 *	43,600 *	125
130	65.7	238.3	42,400 *	42,400 *	42,400 *	42,400 *	42,400 *	42,400 *	130
135	64.4	235.5	41,400 *	41,400 *	41,400 *	41,400 *	41,400 *	41,400 *	135
140	63.1	232.6	40,300 *	40,300 *	40,300 *	40,300 *	40,300 *	40,300 *	140
145	61.8	229.5	39,400 *	39,400 *	39,400 *	39,400 *	39,400 *	39,400 *	145
150	60.5	226.2	38,400 *	38,400 *	38,400 *	38,400 *	38,400 *	38,400 *	150
160	57.8	219.1	36,700 *	36,700 *	36,700 *	36,700 *	36,700 *	36,700 *	160
170	55.0	211.4	35,200 *	35,200 *	35,200 *	35,200 *	35,200 *	35,200 *	170
180	52.1	202.7	33,800 *	33,800 *	33,800 *	33,800 *	33,800 *	33,800 *	180
190	49.1	193.1	32,500 *	32,500 *	32,500 *	32,500 *	32,500 *	32,500 *	190
200	45.8	182.5	31,400 *	31,400 *	31,400 *	31,400 *	31,400 *	31,400 *	200
210	42.4	170.4	30,300 *	30,300 *	30,300 *	30,300 *	30,300 *	30,300 *	210
220	38.7	156.8	29,400 *	29,400 *	29,400 *	29,400 *	29,400 *	29,400 *	220
230	34.5	140.9	28,600 *	28,600 *	28,600 *	28,600 *	28,600 *	28,600 *	230




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

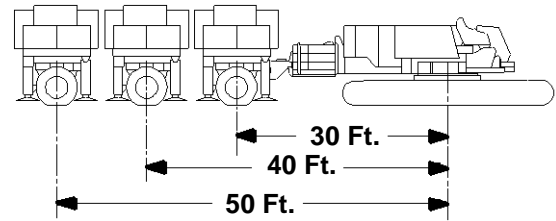

220 Ft. Boom

60 Ft. Jib, 15 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
70	80.7	282.6	64,000 *	64,000 *	64,000 *	64,000 *	64,000 *	64,000 *	70
75	79.6	281.4	61,700 *	61,700 *	61,700 *	61,700 *	61,700 *	61,700 *	75
80	78.5	280.0	59,500 *	59,500 *	59,500 *	59,500 *	59,500 *	59,500 *	80
85	77.5	278.6	57,500 *	57,500 *	57,500 *	57,500 *	57,500 *	57,500 *	85
90	76.4	277.1	55,600 *	55,600 *	55,600 *	55,600 *	55,600 *	55,600 *	90
95	75.3	275.4	53,900 *	53,900 *	53,900 *	53,900 *	53,900 *	53,900 *	95
100	74.3	273.7	52,200 *	52,200 *	52,200 *	52,200 *	52,200 *	52,200 *	100
105	73.2	271.8	50,700 *	50,700 *	50,700 *	50,700 *	50,700 *	50,700 *	105
110	72.1	269.8	49,200 *	49,200 *	49,200 *	49,200 *	49,200 *	49,200 *	110
115	71.0	267.8	47,900 *	47,900 *	47,900 *	47,900 *	47,900 *	47,900 *	115
120	69.8	265.6	46,600 *	46,600 *	46,600 *	46,600 *	46,600 *	46,600 *	120
125	68.7	263.3	45,400 *	45,400 *	45,400 *	45,400 *	45,400 *	45,400 *	125
130	67.6	260.8	44,200 *	44,200 *	44,200 *	44,200 *	44,200 *	44,200 *	130
135	66.4	258.3	43,100 *	43,100 *	43,100 *	43,100 *	43,100 *	43,100 *	135
140	65.3	255.6	42,100 *	42,100 *	42,100 *	42,100 *	42,100 *	42,100 *	140
145	64.1	252.8	41,100 *	41,100 *	41,100 *	41,100 *	41,100 *	41,100 *	145
150	62.9	249.8	40,200 *	40,200 *	40,200 *	40,200 *	40,200 *	40,200 *	150
160	60.5	243.5	38,400 *	38,400 *	38,400 *	38,400 *	38,400 *	38,400 *	160
170	58.0	236.6	36,800 *	36,800 *	36,800 *	36,800 *	36,800 *	36,800 *	170
180	55.4	228.9	35,400 *	35,400 *	35,400 *	35,400 *	35,400 *	35,400 *	180
190	52.7	220.5	34,100 *	34,100 *	34,100 *	34,100 *	34,100 *	34,100 *	190
200	50.0	211.3	32,900 *	32,900 *	32,900 *	32,900 *	32,900 *	32,900 *	200
210	47.0	201.1	31,800 *	31,800 *	31,800 *	31,800 *	31,800 *	31,800 *	210
220	43.9	189.8	30,800 *	30,800 *	30,800 *	30,800 *	30,800 *	30,800 *	220
230	40.6	177.1	29,900 *	29,900 *	29,900 *	29,900 *	29,900 *	29,900 *	230
240	37.1	162.7	29,100 *	29,100 *	29,100 *	29,100 *	29,100 *	29,100 *	240
250	33.1	146.1	28,300 *	28,300 *	28,300 *	28,300 *	28,300 *	28,300 *	250

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

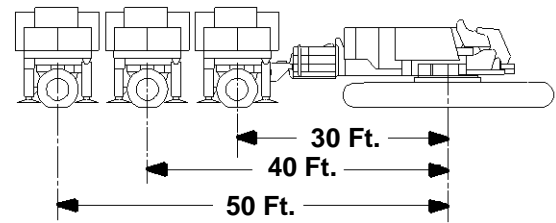

240 Ft. Boom
60 Ft. Jib, 15 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
75	80.3	301.9	63,200 *	63,200 *	63,200 *	63,200 *	63,200 *	63,200 *	75
80	79.3	300.7	61,100 *	61,100 *	61,100 *	61,100 *	61,100 *	61,100 *	80
85	78.3	299.3	59,100 *	59,100 *	59,100 *	59,100 *	59,100 *	59,100 *	85
90	77.3	297.9	57,300 *	57,300 *	57,300 *	57,300 *	57,300 *	57,300 *	90
95	76.4	296.4	55,500 *	55,500 *	55,500 *	55,500 *	55,500 *	55,500 *	95
100	75.3	294.8	53,900 *	53,900 *	53,900 *	53,900 *	53,900 *	53,900 *	100
105	74.3	293.1	52,400 *	52,400 *	52,400 *	52,400 *	52,400 *	52,400 *	105
110	73.3	291.2	50,900 *	50,900 *	50,900 *	50,900 *	50,900 *	50,900 *	110
115	72.3	289.3	49,600 *	49,600 *	49,600 *	49,600 *	49,600 *	49,600 *	115
120	71.3	287.3	48,300 *	48,300 *	48,300 *	48,300 *	48,300 *	48,300 *	120
125	70.2	285.2	47,000 *	47,000 *	47,000 *	47,000 *	47,000 *	47,000 *	125
130	69.2	283.0	45,900 *	45,900 *	45,900 *	45,900 *	45,900 *	45,900 *	130
135	68.1	280.6	44,800 *	44,800 *	44,800 *	44,800 *	44,800 *	44,800 *	135
140	67.1	278.2	43,700 *	43,700 *	43,700 *	43,700 *	43,700 *	43,700 *	140
145	66.0	275.6	42,700 *	42,700 *	42,700 *	42,700 *	42,700 *	42,700 *	145
150	64.9	272.9	41,800 *	41,800 *	41,800 *	41,800 *	41,800 *	41,800 *	150
160	62.7	267.1	40,000 *	40,000 *	40,000 *	40,000 *	40,000 *	40,000 *	160
170	60.4	260.8	38,400 *	38,400 *	38,400 *	38,400 *	38,400 *	38,400 *	170
180	58.1	253.9	36,900 *	36,900 *	36,900 *	36,900 *	36,900 *	36,900 *	180
190	55.7	246.4	35,600 *	35,600 *	35,600 *	35,600 *	35,600 *	35,600 *	190
200	53.3	238.3	34,300 *	34,300 *	34,300 *	34,300 *	34,300 *	34,300 *	200
210	50.7	229.3	33,200 *	33,200 *	33,200 *	33,200 *	33,200 *	33,200 *	210
220	48.0	219.5	32,100 *	32,100 *	32,100 *	32,100 *	32,100 *	32,100 *	220
230	45.2	208.8	31,200 *	31,200 *	31,200 *	31,200 *	31,200 *	31,200 *	230
240	42.3	196.8	30,300 *	30,300 *	30,300 *	30,300 *	30,300 *	30,300 *	240
250	39.1	183.5	29,500 *	29,500 *	29,500 *	29,500 *	29,500 *	29,500 *	250
260	35.6	168.4	28,800 *	28,800 *	28,800 *	28,800 *	28,800 *	28,800 *	260




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

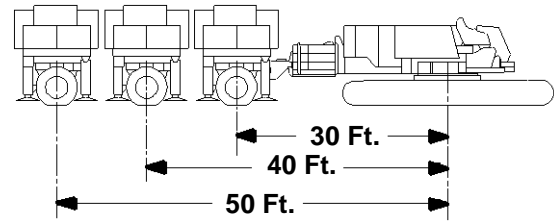

260 Ft. Boom

60 Ft. Jib, 15 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
75	80.9	322.4	64,800 *	64,800 *	64,800 *	64,800 *	64,800 *	64,800 *	75
80	80.0	321.2	62,800 *	62,800 *	62,800 *	62,800 *	62,800 *	62,800 *	80
85	79.1	320.0	60,800 *	60,800 *	60,800 *	60,800 *	60,800 *	60,800 *	85
90	78.2	318.7	59,000 *	59,000 *	59,000 *	59,000 *	59,000 *	59,000 *	90
95	77.2	317.3	57,200 *	57,200 *	57,200 *	57,200 *	57,200 *	57,200 *	95
100	76.3	315.7	55,600 *	55,600 *	55,600 *	55,600 *	55,600 *	55,600 *	100
105	75.4	314.1	54,100 *	54,100 *	54,100 *	54,100 *	54,100 *	54,100 *	105
110	74.4	312.5	52,600 *	52,600 *	52,600 *	52,600 *	52,600 *	52,600 *	110
115	73.5	310.7	51,300 *	51,300 *	51,300 *	51,300 *	51,300 *	51,300 *	115
120	72.5	308.8	50,000 *	50,000 *	50,000 *	50,000 *	50,000 *	50,000 *	120
125	71.5	306.8	48,700 *	48,700 *	48,700 *	48,700 *	48,700 *	48,700 *	125
130	70.6	304.8	47,600 *	47,600 *	47,600 *	47,600 *	47,600 *	47,600 *	130
135	69.6	302.6	46,400 *	46,400 *	46,400 *	46,400 *	46,400 *	46,400 *	135
140	68.6	300.3	45,400 *	45,400 *	45,400 *	45,400 *	45,400 *	45,400 *	140
145	67.6	297.9	44,400 *	44,400 *	44,400 *	44,400 *	44,400 *	44,400 *	145
150	66.6	295.5	43,400 *	43,400 *	43,400 *	43,400 *	43,400 *	43,400 *	150
160	64.6	290.2	41,600 *	41,600 *	41,600 *	41,600 *	41,600 *	41,600 *	160
170	62.5	284.4	40,000 *	40,000 *	40,000 *	40,000 *	40,000 *	40,000 *	170
180	60.4	278.1	38,500 *	38,500 *	38,500 *	38,500 *	38,500 *	38,500 *	180
190	58.3	271.3	37,100 *	37,100 *	37,100 *	37,100 *	37,100 *	37,100 *	190
200	56.0	264.0	35,800 *	35,800 *	35,800 *	35,800 *	35,800 *	35,800 *	200
210	53.7	256.0	34,600 *	34,600 *	34,600 *	34,600 *	34,600 *	34,600 *	210
220	51.4	247.3	33,500 *	33,500 *	33,500 *	33,500 *	33,500 *	33,500 *	220
230	48.9	237.8	32,500 *	32,500 *	32,500 *	32,500 *	32,500 *	32,500 *	230
240	46.3	227.5	31,600 *	31,600 *	31,600 *	31,600 *	31,600 *	31,600 *	240
250	43.6	216.1	30,700 *	30,700 *	30,700 *	30,700 *	30,700 *	30,700 *	250
260	40.7	203.6	29,900 *	29,900 *	29,900 *	29,900 *	29,900 *	29,900 *	260
270	37.7	189.7	25,500 *	25,500 *	25,500 *	25,500 *	25,500 *	25,500 *	270
280	34.3	174.0	20,900 *	20,900 *	20,900 *	20,900 *	20,900 *	20,900 *	280

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

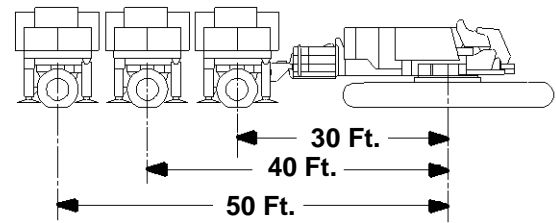

280 Ft. Boom
60 Ft. Jib, 15 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
80	80.8	341.5	64,700 *	64,700 *	64,700 *	64,700 *	64,700 *	64,700 *	80
85	79.9	340.3	64,300 *	64,300 *	64,300 *	64,300 *	64,300 *	64,300 *	85
90	79.0	339.1	63,900 *	63,900 *	63,900 *	63,900 *	63,900 *	63,900 *	90
95	78.1	337.7	63,400 *	63,400 *	63,400 *	63,400 *	63,400 *	63,400 *	95
100	77.3	336.3	63,000 *	63,000 *	63,000 *	63,000 *	63,000 *	63,000 *	100
105	76.4	334.8	62,700 *	62,700 *	62,700 *	62,700 *	62,700 *	62,700 *	105
110	75.5	333.3	62,300 *	62,300 *	62,300 *	62,300 *	62,300 *	62,300 *	110
115	74.6	331.6	61,900 *	61,900 *	61,900 *	61,900 *	61,900 *	61,900 *	115
120	73.7	329.8	61,600 *	61,600 *	61,600 *	61,600 *	61,600 *	61,600 *	120
125	72.8	328.0	61,300 *	61,300 *	61,300 *	61,300 *	61,300 *	61,300 *	125
130	71.9	326.1	59,900 *	59,900 *	59,900 *	59,900 *	59,900 *	59,900 *	130
135	71.0	324.0	58,700 *	58,700 *	58,700 *	58,700 *	58,700 *	58,700 *	135
140	70.1	321.9	57,400 *	57,400 *	57,400 *	57,400 *	57,400 *	57,400 *	140
145	69.2	319.7	56,300 *	56,300 *	56,300 *	56,300 *	56,300 *	56,300 *	145
150	68.2	317.4	55,100 *	55,100 *	55,100 *	55,100 *	55,100 *	55,100 *	150
160	66.4	312.5	53,000 *	53,000 *	53,000 *	53,000 *	53,000 *	53,000 *	160
170	64.5	307.2	51,100 *	51,100 *	51,100 *	51,100 *	51,100 *	51,100 *	170
180	62.5	301.4	49,300 *	49,300 *	49,300 *	49,300 *	49,300 *	49,300 *	180
190	60.5	295.1	47,600 *	47,600 *	47,600 *	47,600 *	47,600 *	47,600 *	190
200	58.5	288.4	46,100 *	46,100 *	46,100 *	46,100 *	46,100 *	46,100 *	200
210	56.4	281.1	44,700 *	44,700 *	44,700 *	44,700 *	44,700 *	44,700 *	210
220	54.3	273.3	43,400 *	43,400 *	43,400 *	43,400 *	43,400 *	43,400 *	220
230	52.0	264.8	40,000	42,200 *	42,200 *	42,200 *	42,200 *	42,200 *	230
240	49.7	255.6	36,600	41,000 *	41,000 *	41,000 *	41,000 *	41,000 *	240
250	47.4	245.6	33,400	40,000 *	40,000 *	40,000 *	40,000 *	40,000 *	250
260	44.9	234.7	30,400	39,000 *	38,100	39,000 *	39,000 *	39,000 *	260
270	42.3	222.9	27,600	38,100 *	35,100	38,100 *	38,100 *	38,100 *	270
280	39.5	209.8	25,100	37,300 *	32,200	37,300 *	37,300 *	37,300 *	280
290	36.5	195.2	22,700	36,600 *	29,600	36,600 *	36,500	36,600 *	290




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

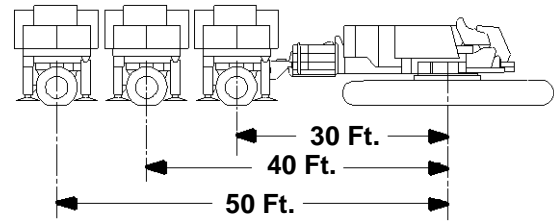

300 Ft. Boom

60 Ft. Jib, 15 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
85	80.5	360.8	64,100 *	64,100 *	64,100 *	64,100 *	64,100 *	64,100 *	85
90	79.6	359.7	63,700 *	63,700 *	63,700 *	63,700 *	63,700 *	63,700 *	90
95	78.8	358.4	63,300 *	63,300 *	63,300 *	63,300 *	63,300 *	63,300 *	95
100	78.0	357.1	62,900 *	62,900 *	62,900 *	62,900 *	62,900 *	62,900 *	100
105	77.2	355.7	62,600 *	62,600 *	62,600 *	62,600 *	62,600 *	62,600 *	105
110	76.3	354.2	62,200 *	62,200 *	62,200 *	62,200 *	62,200 *	62,200 *	110
115	75.5	352.6	61,900 *	61,900 *	61,900 *	61,900 *	61,900 *	61,900 *	115
120	74.7	351.0	61,600 *	61,600 *	61,600 *	61,600 *	61,600 *	61,600 *	120
125	73.8	349.3	61,300 *	61,300 *	61,300 *	61,300 *	61,300 *	61,300 *	125
130	73.0	347.4	60,900 *	60,900 *	60,900 *	60,900 *	60,900 *	60,900 *	130
135	72.1	345.6	60,300 *	60,300 *	60,300 *	60,300 *	60,300 *	60,300 *	135
140	71.3	343.6	59,100 *	59,100 *	59,100 *	59,100 *	59,100 *	59,100 *	140
145	70.4	341.5	57,900 *	57,900 *	57,900 *	57,900 *	57,900 *	57,900 *	145
150	69.5	339.4	56,800 *	56,800 *	56,800 *	56,800 *	56,800 *	56,800 *	150
160	67.8	334.8	54,600 *	54,600 *	54,600 *	54,600 *	54,600 *	54,600 *	160
170	66.0	329.8	52,700 *	52,700 *	52,700 *	52,700 *	52,700 *	52,700 *	170
180	64.2	324.4	50,900 *	50,900 *	50,900 *	50,900 *	50,900 *	50,900 *	180
190	62.4	318.7	49,200 *	49,200 *	49,200 *	49,200 *	49,200 *	49,200 *	190
200	60.5	312.5	47,600 *	47,600 *	47,600 *	47,600 *	47,600 *	47,600 *	200
210	58.6	305.8	46,200 *	46,200 *	46,200 *	46,200 *	46,200 *	46,200 *	210
220	56.6	298.6	43,200	44,900 *	44,900 *	44,900 *	44,900 *	44,900 *	220
230	54.6	290.9	39,400	43,600 *	43,600 *	43,600 *	43,600 *	43,600 *	230
240	52.5	282.5	35,900	42,400 *	42,400 *	42,400 *	42,400 *	42,400 *	240
250	50.4	273.6	32,700	41,400 *	40,700	41,400 *	41,400 *	41,400 *	250
260	48.2	263.9	29,800	40,300 *	37,500	40,300 *	40,300 *	40,300 *	260
270	45.9	253.5	27,000	39,400 *	34,400	39,400 *	39,400 *	39,400 *	270
280	43.5	242.1	24,500	38,500 *	31,600	38,500 *	38,500 *	38,500 *	280
290	40.9	229.7	22,100	37,700 *	29,000	37,700 *	35,900	37,700 *	290
300	38.2	216.1	19,900	36,400 *	26,500	37,000 *	33,200	37,000 *	300
310	35.3	201.0	17,800	32,500 *	24,200	36,300 *	30,700	36,300 *	310

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

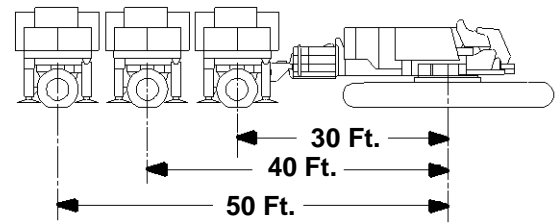

320 Ft. Boom
60 Ft. Jib, 15 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
85	81.0	381.3	63,900 *	63,900 *	63,900 *	63,900 *	63,900 *	63,900 *	85
90	80.2	380.2	63,500 *	63,500 *	63,500 *	63,500 *	63,500 *	63,500 *	90
95	79.4	379.0	63,200 *	63,200 *	63,200 *	63,200 *	63,200 *	63,200 *	95
100	78.7	377.7	62,800 *	62,800 *	62,800 *	62,800 *	62,800 *	62,800 *	100
105	77.9	376.4	62,500 *	62,500 *	62,500 *	62,500 *	62,500 *	62,500 *	105
110	77.1	375.0	62,200 *	62,200 *	62,200 *	62,200 *	62,200 *	62,200 *	110
115	76.3	373.5	61,900 *	61,900 *	61,900 *	61,900 *	61,900 *	61,900 *	115
120	75.5	372.0	61,500 *	61,500 *	61,500 *	61,500 *	61,500 *	61,500 *	120
125	74.7	370.4	61,200 *	61,200 *	61,200 *	61,200 *	61,200 *	61,200 *	125
130	73.9	368.7	60,900 *	60,900 *	60,900 *	60,900 *	60,900 *	60,900 *	130
135	73.1	366.9	60,600 *	60,600 *	60,600 *	60,600 *	60,600 *	60,600 *	135
140	72.3	365.0	60,400 *	60,400 *	60,400 *	60,400 *	60,400 *	60,400 *	140
145	71.5	363.1	59,300 *	59,300 *	59,300 *	59,300 *	59,300 *	59,300 *	145
150	70.7	361.1	58,200 *	58,200 *	58,200 *	58,200 *	58,200 *	58,200 *	150
160	69.0	356.8	56,100 *	56,100 *	56,100 *	56,100 *	56,100 *	56,100 *	160
170	67.4	352.1	54,100 *	54,100 *	54,100 *	54,100 *	54,100 *	54,100 *	170
180	65.7	347.1	52,300 *	52,300 *	52,300 *	52,300 *	52,300 *	52,300 *	180
190	64.0	341.7	50,600 *	50,600 *	50,600 *	50,600 *	50,600 *	50,600 *	190
200	62.2	336.0	48,800 *	49,000 *	49,000 *	49,000 *	49,000 *	49,000 *	200
210	60.5	329.8	44,200 *	47,600 *	47,600 *	47,600 *	47,600 *	47,600 *	210
220	58.7	323.1	40,000 *	46,200 *	46,200 *	46,200 *	46,200 *	46,200 *	220
230	56.8	316.0	36,200 *	44,900 *	44,900 *	44,900 *	44,900 *	44,900 *	230
240	54.9	308.4	32,700 *	43,800 *	41,100 *	43,800 *	43,800 *	43,800 *	240
250	53.0	300.3	29,500 *	42,600 *	37,500 *	42,600 *	42,600 *	42,600 *	250
260	50.9	291.5	26,500 *	41,600 *	34,200 *	41,600 *	41,600 *	41,600 *	260
270	48.9	282.1	23,800 *	40,600 *	31,200 *	40,600 *	38,700 *	40,600 *	270
280	46.7	272.0	21,200 *	39,700 *	28,400 *	39,700 *	35,600 *	39,700 *	280
290	44.5	261.1	18,900 *	37,900 *	25,700 *	38,900 *	32,700 *	38,900 *	290
300	42.2	249.3	16,600 *	33,800 *	23,300 *	38,100 *	30,000 *	38,100 *	300
310	39.7	236.4	14,400 *	29,900 *	20,900 *	37,400 *	27,400 *	37,400 *	310
320	37.1	222.2	12,000 *	26,200 *	18,800 *	36,700 *	25,000 *	36,700 *	320
330	34.3	206.6	9,700 *	22,700 *	16,700 *	36,100 *	22,800 *	36,100 *	330




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

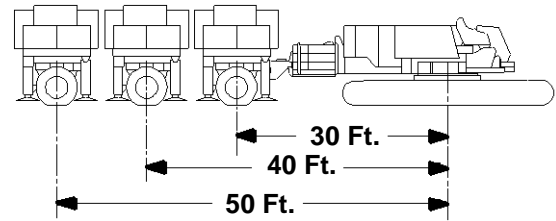

340 Ft. Boom
60 Ft. Jib, 15 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position	40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
90	80.7	400.6	63,200 *	63,200 *	63,200 *	63,200 *	63,200 *	90
95	80.0	399.5	62,900 *	62,900 *	62,900 *	62,900 *	62,900 *	95
100	79.2	398.3	62,600 *	62,600 *	62,600 *	62,600 *	62,600 *	100
105	78.5	397.1	62,200 *	62,200 *	62,200 *	62,200 *	62,200 *	105
110	77.8	395.8	61,900 *	61,900 *	61,900 *	61,900 *	61,900 *	110
115	77.0	394.4	61,600 *	61,600 *	61,600 *	61,600 *	61,600 *	115
120	76.3	392.9	61,400 *	61,400 *	61,400 *	61,400 *	61,400 *	120
125	75.5	391.4	61,100 *	61,100 *	61,100 *	61,100 *	61,100 *	125
130	74.8	389.7	60,800 *	60,800 *	60,800 *	60,800 *	60,800 *	130
135	74.0	388.1	60,500 *	60,500 *	60,500 *	60,500 *	60,500 *	135
140	73.2	386.3	60,300 *	60,300 *	60,300 *	60,300 *	60,300 *	140
145	72.5	384.5	60,100 *	60,100 *	60,100 *	60,100 *	60,100 *	145
150	71.7	382.6	59,700 *	59,700 *	59,700 *	59,700 *	59,700 *	150
160	70.2	378.5	57,600 *	57,600 *	57,600 *	57,600 *	57,600 *	160
170	68.6	374.2	55,600 *	55,600 *	55,600 *	55,600 *	55,600 *	170
180	67.0	369.5	53,800 *	53,800 *	53,800 *	53,800 *	53,800 *	180
190	65.4	364.4	52,100 *	52,100 *	52,100 *	52,100 *	52,100 *	190
200	63.8	359.0	50,500 *	50,500 *	50,500 *	50,500 *	50,500 *	200
210	62.1	353.2	49,000 *	49,000 *	49,000 *	49,000 *	49,000 *	210
220	60.4	347.1	47,600 *	47,600 *	47,600 *	47,600 *	47,600 *	220
230	58.7	340.5	46,300 *	44,300	46,300 *	46,300 *	46,300 *	230
240	57.0	333.5	45,100 *	40,400	45,100 *	45,100 *	45,100 *	240
250	55.2	325.9	44,000 *	36,900	44,000 *	44,000 *	44,000 *	250
260	53.3	317.9	42,900 *	33,600	42,900 *	41,400	42,900 *	260
270	51.4	309.4	41,900 *	30,500	41,900 *	38,000	41,900 *	270
280	49.5	300.2	40,900 *	27,700	40,900 *	34,900	40,900 *	280
290	47.5	290.4	38,100 *	25,100	40,100 *	32,000	40,100 *	290
300	45.4	279.9	34,600 *	22,600	39,200 *	29,300	39,200 *	300
310	43.2	268.5	30,700 *	20,300	38,500 *	26,800	38,500 *	310
320	41.0	256.2	27,000 *	18,200	37,700 *	24,400	37,700 *	320
330	38.6	242.8	23,500 *	16,100	37,100 *	22,200	37,100 *	330
340	36.0	228.2	20,200 *	14,100 *	34,100 *	20,100	36,500 *	340

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

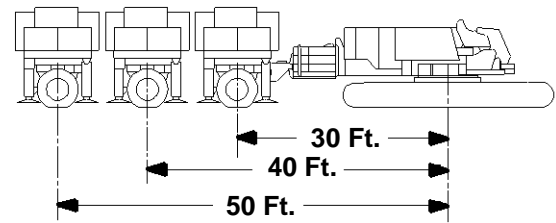

360 Ft. Boom
60 Ft. Jib, 15 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	40 Ft. Position	50 Ft. Position		Jib Oper. Rad. Feet
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
95	80.5	420.0	62,200 *	62,200 *	62,200 *	95
100	79.8	418.9	62,000 *	62,000 *	62,000 *	100
105	79.1	417.7	61,700 *	61,700 *	61,700 *	105
110	78.4	416.4	61,400 *	61,400 *	61,400 *	110
115	77.6	415.1	61,100 *	61,100 *	61,100 *	115
120	76.9	413.7	60,800 *	60,800 *	60,800 *	120
125	76.2	412.2	60,600 *	60,600 *	60,600 *	125
130	75.5	410.7	60,400 *	60,400 *	60,400 *	130
135	74.8	409.1	60,200 *	60,200 *	60,200 *	135
140	74.1	407.5	59,900 *	59,900 *	59,900 *	140
145	73.4	405.7	59,700 *	59,700 *	59,700 *	145
150	72.6	403.9	59,500 *	59,500 *	59,500 *	150
160	71.2	400.1	59,000 *	59,000 *	59,000 *	160
170	69.7	396.0	57,000 *	57,000 *	57,000 *	170
180	68.2	391.6	55,200 *	55,200 *	55,200 *	180
190	66.7	386.8	53,400 *	53,400 *	53,400 *	190
200	65.2	381.7	51,800 *	51,800 *	51,800 *	200
210	63.6	376.3	50,300 *	50,300 *	50,300 *	210
220	62.0	370.5	48,900 *	48,900 *	48,900 *	220
230	60.4	364.4	47,600 *	47,600 *	47,600 *	230
240	58.8	357.8	46,400 *	46,400 *	46,400 *	240
250	57.1	350.9	45,200 *	44,800	45,200 *	250
260	55.4	343.5	44,100 *	41,200	44,100 *	260
270	53.7	335.6	43,100 *	37,800	43,100 *	270
280	51.9	327.2	42,100 *	34,700	42,100 *	280
290	50.1	318.2	41,200 *	31,800	41,200 *	290
300	48.2	308.7	40,400 *	29,100	40,400 *	300
310	46.2	298.4	39,600 *	26,600	39,600 *	310
320	44.2	287.5	38,800 *	24,300	38,800 *	320
330	42.1	275.7	38,100 *	22,000	38,100 *	330
340	39.9	263.0	35,700 *	19,900	37,400 *	340
350	37.5	249.1	32,000 *	17,900	36,800 *	350
360	35.1	234.0	28,500 *	16,000	36,300 *	360

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

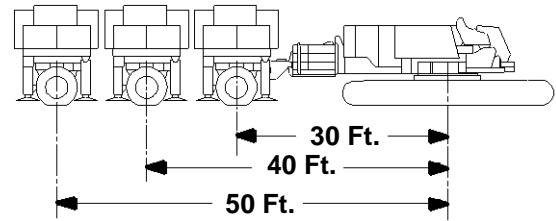

380 Ft. Boom 60 Ft. Jib, 15 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	50 Ft. Position
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds
95	80.9	440.4	61,600 *
100	80.2	439.3	61,400 *
105	79.6	438.2	61,100 *
110	78.9	437.0	60,900 *
115	78.2	435.8	60,600 *
120	77.5	434.4	60,400 *
125	76.9	433.0	60,100 *
130	76.2	431.6	59,900 *
135	75.5	430.1	59,700 *
140	74.8	428.5	59,500 *
145	74.1	426.9	59,300 *
150	73.5	425.2	59,100 *
160	72.1	421.5	58,700 *
170	70.7	417.6	58,300 *
180	69.3	413.4	56,500 *
190	67.8	408.9	54,800 *
200	66.4	404.2	53,100 *
210	64.9	399.0	51,600 *
220	63.4	393.6	50,200 *
230	61.9	387.8	48,900 *
240	60.4	381.7	47,600 *
250	58.8	375.2	46,400 *
260	57.3	368.3	45,300 *
270	55.6	360.9	44,300 *
280	54.0	353.2	43,300 *
290	52.3	344.9	42,400 *
300	50.6	336.1	41,500 *
310	48.8	326.8	40,600 *
320	46.9	316.9	39,900 *
330	45.0	306.2	39,100 *
340	43.1	294.9	38,400 *
350	41.0	282.7	37,800 *
360	38.9	269.5	37,200 *
370	36.6	255.3	32,800 *
380	34.2	239.7	28,600 *

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

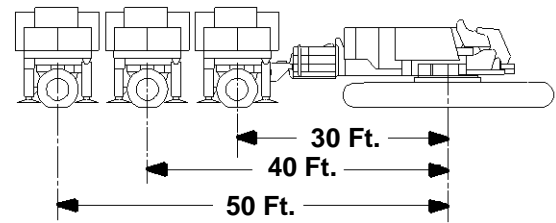

200 Ft. Boom
60 Ft. Jib, 30 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
80	80.3	254.6	33,800 *	33,800 *	33,800 *	33,800 *	33,800 *	33,800 *	80
85	79.1	253.0	33,000 *	33,000 *	33,000 *	33,000 *	33,000 *	33,000 *	85
90	77.9	251.3	32,200 *	32,200 *	32,200 *	32,200 *	32,200 *	32,200 *	90
95	76.7	249.5	31,400 *	31,400 *	31,400 *	31,400 *	31,400 *	31,400 *	95
100	75.5	247.6	30,700 *	30,700 *	30,700 *	30,700 *	30,700 *	30,700 *	100
105	74.3	245.5	30,000 *	30,000 *	30,000 *	30,000 *	30,000 *	30,000 *	105
110	73.1	243.3	29,400 *	29,400 *	29,400 *	29,400 *	29,400 *	29,400 *	110
115	71.8	241.0	28,800 *	28,800 *	28,800 *	28,800 *	28,800 *	28,800 *	115
120	70.6	238.6	28,200 *	28,200 *	28,200 *	28,200 *	28,200 *	28,200 *	120
125	69.3	236.0	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	125
130	68.0	233.2	27,100 *	27,100 *	27,100 *	27,100 *	27,100 *	27,100 *	130
135	66.8	230.4	26,600 *	26,600 *	26,600 *	26,600 *	26,600 *	26,600 *	135
140	65.4	227.3	26,200 *	26,200 *	26,200 *	26,200 *	26,200 *	26,200 *	140
145	64.1	224.2	25,700 *	25,700 *	25,700 *	25,700 *	25,700 *	25,700 *	145
150	62.8	220.8	25,300 *	25,300 *	25,300 *	25,300 *	25,300 *	25,300 *	150
160	60.0	213.6	24,500 *	24,500 *	24,500 *	24,500 *	24,500 *	24,500 *	160
170	57.1	205.5	23,800 *	23,800 *	23,800 *	23,800 *	23,800 *	23,800 *	170
180	54.1	196.7	23,100 *	23,100 *	23,100 *	23,100 *	23,100 *	23,100 *	180
190	51.0	186.7	22,500 *	22,500 *	22,500 *	22,500 *	22,500 *	22,500 *	190
200	47.6	175.6	22,000 *	22,000 *	22,000 *	22,000 *	22,000 *	22,000 *	200




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

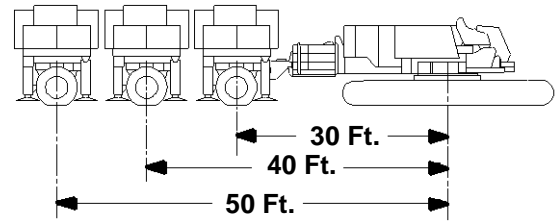

220 Ft. Boom

60 Ft. Jib, 30 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
80	81.0	275.3	34,400 *	34,400 *	34,400 *	34,400 *	34,400 *	34,400 *	80
85	79.9	273.8	33,500 *	33,500 *	33,500 *	33,500 *	33,500 *	33,500 *	85
90	78.8	272.3	32,800 *	32,800 *	32,800 *	32,800 *	32,800 *	32,800 *	90
95	77.7	270.6	32,100 *	32,100 *	32,100 *	32,100 *	32,100 *	32,100 *	95
100	76.6	268.8	31,400 *	31,400 *	31,400 *	31,400 *	31,400 *	31,400 *	100
105	75.5	266.9	30,700 *	30,700 *	30,700 *	30,700 *	30,700 *	30,700 *	105
110	74.4	264.9	30,100 *	30,100 *	30,100 *	30,100 *	30,100 *	30,100 *	110
115	73.3	262.8	29,500 *	29,500 *	29,500 *	29,500 *	29,500 *	29,500 *	115
120	72.1	260.6	28,900 *	28,900 *	28,900 *	28,900 *	28,900 *	28,900 *	120
125	71.0	258.2	28,400 *	28,400 *	28,400 *	28,400 *	28,400 *	28,400 *	125
130	69.8	255.7	27,900 *	27,900 *	27,900 *	27,900 *	27,900 *	27,900 *	130
135	68.6	253.1	27,400 *	27,400 *	27,400 *	27,400 *	27,400 *	27,400 *	135
140	67.4	250.4	26,900 *	26,900 *	26,900 *	26,900 *	26,900 *	26,900 *	140
145	66.2	247.5	26,400 *	26,400 *	26,400 *	26,400 *	26,400 *	26,400 *	145
150	65.0	244.5	26,000 *	26,000 *	26,000 *	26,000 *	26,000 *	26,000 *	150
160	62.6	238.0	25,200 *	25,200 *	25,200 *	25,200 *	25,200 *	25,200 *	160
170	60.0	230.9	24,500 *	24,500 *	24,500 *	24,500 *	24,500 *	24,500 *	170
180	57.4	223.1	23,800 *	23,800 *	23,800 *	23,800 *	23,800 *	23,800 *	180
190	54.6	214.4	23,200 *	23,200 *	23,200 *	23,200 *	23,200 *	23,200 *	190
200	51.7	204.9	22,700 *	22,700 *	22,700 *	22,700 *	22,700 *	22,700 *	200
210	48.7	194.4	22,200 *	22,200 *	22,200 *	22,200 *	22,200 *	22,200 *	210

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

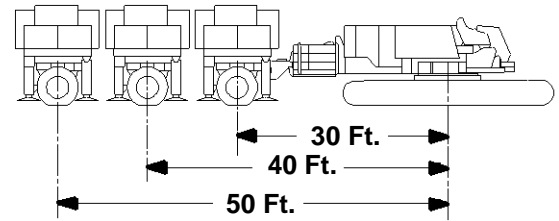

240 Ft. Boom
60 Ft. Jib, 30 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
85	80.6	294.5	34,100 *	34,100 *	34,100 *	34,100 *	34,100 *	34,100 *	85
90	79.6	293.1	33,300 *	33,300 *	33,300 *	33,300 *	33,300 *	33,300 *	90
95	78.6	291.5	32,600 *	32,600 *	32,600 *	32,600 *	32,600 *	32,600 *	95
100	77.6	289.9	32,000 *	32,000 *	32,000 *	32,000 *	32,000 *	32,000 *	100
105	76.5	288.1	31,300 *	31,300 *	31,300 *	31,300 *	31,300 *	31,300 *	105
110	75.5	286.3	30,700 *	30,700 *	30,700 *	30,700 *	30,700 *	30,700 *	110
115	74.5	284.3	30,100 *	30,100 *	30,100 *	30,100 *	30,100 *	30,100 *	115
120	73.4	282.3	29,600 *	29,600 *	29,600 *	29,600 *	29,600 *	29,600 *	120
125	72.4	280.1	29,000 *	29,000 *	29,000 *	29,000 *	29,000 *	29,000 *	125
130	71.3	277.8	28,500 *	28,500 *	28,500 *	28,500 *	28,500 *	28,500 *	130
135	70.2	275.5	28,000 *	28,000 *	28,000 *	28,000 *	28,000 *	28,000 *	135
140	69.1	272.9	27,600 *	27,600 *	27,600 *	27,600 *	27,600 *	27,600 *	140
145	68.0	270.3	27,100 *	27,100 *	27,100 *	27,100 *	27,100 *	27,100 *	145
150	66.9	267.6	26,700 *	26,700 *	26,700 *	26,700 *	26,700 *	26,700 *	150
160	64.7	261.7	25,900 *	25,900 *	25,900 *	25,900 *	25,900 *	25,900 *	160
170	62.4	255.2	25,200 *	25,200 *	25,200 *	25,200 *	25,200 *	25,200 *	170
180	60.0	248.2	24,500 *	24,500 *	24,500 *	24,500 *	24,500 *	24,500 *	180
190	57.6	240.5	23,900 *	23,900 *	23,900 *	23,900 *	23,900 *	23,900 *	190
200	55.0	232.1	23,300 *	23,300 *	23,300 *	23,300 *	23,300 *	23,300 *	200
210	52.4	222.9	22,800 *	22,800 *	22,800 *	22,800 *	22,800 *	22,800 *	210
220	49.6	212.8	22,300 *	22,300 *	22,300 *	22,300 *	22,300 *	22,300 *	220
230	46.7	201.7	21,900 *	21,900 *	21,900 *	21,900 *	21,900 *	21,900 *	230




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

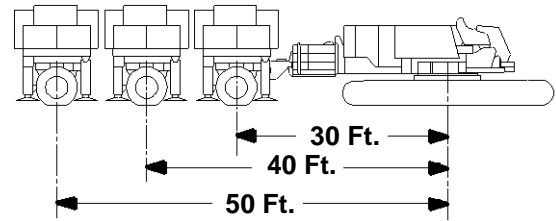

260 Ft. Boom
60 Ft. Jib, 30 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
90	80.3	313.8	33,900 *	33,900 *	33,900 *	33,900 *	33,900 *	33,900 *	90
95	79.3	312.3	33,200 *	33,200 *	33,200 *	33,200 *	33,200 *	33,200 *	95
100	78.4	310.8	32,600 *	32,600 *	32,600 *	32,600 *	32,600 *	32,600 *	100
105	77.4	309.2	31,900 *	31,900 *	31,900 *	31,900 *	31,900 *	31,900 *	105
110	76.5	307.5	31,300 *	31,300 *	31,300 *	31,300 *	31,300 *	31,300 *	110
115	75.5	305.7	30,800 *	30,800 *	30,800 *	30,800 *	30,800 *	30,800 *	115
120	74.5	303.7	30,200 *	30,200 *	30,200 *	30,200 *	30,200 *	30,200 *	120
125	73.6	301.7	29,700 *	29,700 *	29,700 *	29,700 *	29,700 *	29,700 *	125
130	72.6	299.6	29,200 *	29,200 *	29,200 *	29,200 *	29,200 *	29,200 *	130
135	71.6	297.4	28,700 *	28,700 *	28,700 *	28,700 *	28,700 *	28,700 *	135
140	70.6	295.1	28,200 *	28,200 *	28,200 *	28,200 *	28,200 *	28,200 *	140
145	69.6	292.7	27,800 *	27,800 *	27,800 *	27,800 *	27,800 *	27,800 *	145
150	68.5	290.2	27,400 *	27,400 *	27,400 *	27,400 *	27,400 *	27,400 *	150
160	66.5	284.8	26,600 *	26,600 *	26,600 *	26,600 *	26,600 *	26,600 *	160
170	64.4	278.9	25,800 *	25,800 *	25,800 *	25,800 *	25,800 *	25,800 *	170
180	62.2	272.5	25,100 *	25,100 *	25,100 *	25,100 *	25,100 *	25,100 *	180
190	60.0	265.5	24,500 *	24,500 *	24,500 *	24,500 *	24,500 *	24,500 *	190
200	57.7	258.0	23,900 *	23,900 *	23,900 *	23,900 *	23,900 *	23,900 *	200
210	55.4	249.8	23,400 *	23,400 *	23,400 *	23,400 *	23,400 *	23,400 *	210
220	52.9	240.9	22,900 *	22,900 *	22,900 *	22,900 *	22,900 *	22,900 *	220
230	50.4	231.1	22,500 *	22,500 *	22,500 *	22,500 *	22,500 *	22,500 *	230
240	47.7	220.5	20,400 *	20,400 *	20,400 *	20,400 *	20,400 *	20,400 *	240

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

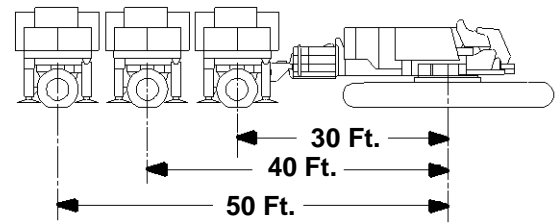

280 Ft. Boom
60 Ft. Jib, 30 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
90	80.8	334.7	42,300 *	42,300 *	42,300 *	42,300 *	42,300 *	42,300 *	90
95	79.9	333.3	41,500 *	41,500 *	41,500 *	41,500 *	41,500 *	41,500 *	95
100	79.0	331.9	40,800 *	40,800 *	40,800 *	40,800 *	40,800 *	40,800 *	100
105	78.1	330.4	40,000 *	40,000 *	40,000 *	40,000 *	40,000 *	40,000 *	105
110	77.2	328.8	39,300 *	39,300 *	39,300 *	39,300 *	39,300 *	39,300 *	110
115	76.3	327.1	38,600 *	38,600 *	38,600 *	38,600 *	38,600 *	38,600 *	115
120	75.4	325.3	38,000 *	38,000 *	38,000 *	38,000 *	38,000 *	38,000 *	120
125	74.5	323.4	37,400 *	37,400 *	37,400 *	37,400 *	37,400 *	37,400 *	125
130	73.6	321.5	36,800 *	36,800 *	36,800 *	36,800 *	36,800 *	36,800 *	130
135	72.7	319.4	36,200 *	36,200 *	36,200 *	36,200 *	36,200 *	36,200 *	135
140	71.7	317.3	35,700 *	35,700 *	35,700 *	35,700 *	35,700 *	35,700 *	140
145	70.8	315.0	35,100 *	35,100 *	35,100 *	35,100 *	35,100 *	35,100 *	145
150	69.9	312.7	34,600 *	34,600 *	34,600 *	34,600 *	34,600 *	34,600 *	150
160	68.0	307.7	33,600 *	33,600 *	33,600 *	33,600 *	33,600 *	33,600 *	160
170	66.0	302.3	32,700 *	32,700 *	32,700 *	32,700 *	32,700 *	32,700 *	170
180	64.0	296.4	31,900 *	31,900 *	31,900 *	31,900 *	31,900 *	31,900 *	180
190	62.0	290.0	31,100 *	31,100 *	31,100 *	31,100 *	31,100 *	31,100 *	190
200	59.9	283.2	30,400 *	30,400 *	30,400 *	30,400 *	30,400 *	30,400 *	200
210	57.8	275.8	29,800 *	29,800 *	29,800 *	29,800 *	29,800 *	29,800 *	210
220	55.6	267.7	29,100 *	29,100 *	29,100 *	29,100 *	29,100 *	29,100 *	220
230	53.4	259.1	28,600 *	28,600 *	28,600 *	28,600 *	28,600 *	28,600 *	230
240	51.0	249.6	28,100 *	28,100 *	28,100 *	28,100 *	28,100 *	28,100 *	240
250	48.6	239.4	27,600 *	27,600 *	27,600 *	27,600 *	27,600 *	27,600 *	250
260	46.0	228.2	27,200 *	27,200 *	27,200 *	27,200 *	27,200 *	27,200 *	260




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

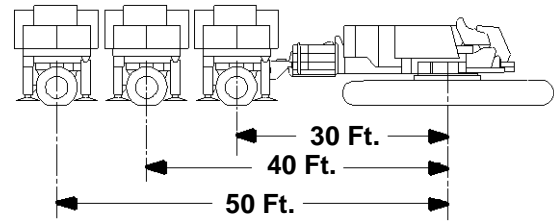

300 Ft. Boom
60 Ft. Jib, 30 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
95	80.5	353.9	42,100 *	42,100 *	42,100 *	42,100 *	42,100 *	42,100 *	95
100	79.7	352.6	41,300 *	41,300 *	41,300 *	41,300 *	41,300 *	41,300 *	100
105	78.8	351.2	40,600 *	40,600 *	40,600 *	40,600 *	40,600 *	40,600 *	105
110	78.0	349.7	39,900 *	39,900 *	39,900 *	39,900 *	39,900 *	39,900 *	110
115	77.1	348.1	39,300 *	39,300 *	39,300 *	39,300 *	39,300 *	39,300 *	115
120	76.3	346.4	38,600 *	38,600 *	38,600 *	38,600 *	38,600 *	38,600 *	120
125	75.4	344.7	38,000 *	38,000 *	38,000 *	38,000 *	38,000 *	38,000 *	125
130	74.6	342.8	37,400 *	37,400 *	37,400 *	37,400 *	37,400 *	37,400 *	130
135	73.7	340.9	36,900 *	36,900 *	36,900 *	36,900 *	36,900 *	36,900 *	135
140	72.8	338.9	36,300 *	36,300 *	36,300 *	36,300 *	36,300 *	36,300 *	140
145	72.0	336.8	35,800 *	35,800 *	35,800 *	35,800 *	35,800 *	35,800 *	145
150	71.1	334.6	35,300 *	35,300 *	35,300 *	35,300 *	35,300 *	35,300 *	150
160	69.3	330.0	34,300 *	34,300 *	34,300 *	34,300 *	34,300 *	34,300 *	160
170	67.5	324.9	33,400 *	33,400 *	33,400 *	33,400 *	33,400 *	33,400 *	170
180	65.7	319.5	32,600 *	32,600 *	32,600 *	32,600 *	32,600 *	32,600 *	180
190	63.8	313.6	31,800 *	31,800 *	31,800 *	31,800 *	31,800 *	31,800 *	190
200	61.9	307.3	31,100 *	31,100 *	31,100 *	31,100 *	31,100 *	31,100 *	200
210	59.9	300.5	30,400 *	30,400 *	30,400 *	30,400 *	30,400 *	30,400 *	210
220	57.9	293.2	29,800 *	29,800 *	29,800 *	29,800 *	29,800 *	29,800 *	220
230	55.9	285.3	29,200 *	29,200 *	29,200 *	29,200 *	29,200 *	29,200 *	230
240	53.8	276.8	28,700 *	28,700 *	28,700 *	28,700 *	28,700 *	28,700 *	240
250	51.6	267.7	28,200 *	28,200 *	28,200 *	28,200 *	28,200 *	28,200 *	250
260	49.3	257.8	27,800 *	27,800 *	27,800 *	27,800 *	27,800 *	27,800 *	260
270	47.0	247.0	27,300 *	27,300 *	27,300 *	27,300 *	27,300 *	27,300 *	270

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

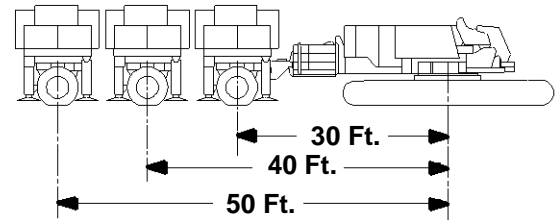

320 Ft. Boom
60 Ft. Jib, 30 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
95	81.0	374.5	42,500 *	42,500 *	42,500 *	42,500 *	42,500 *	42,500 *	95
100	80.2	373.2	41,800 *	41,800 *	41,800 *	41,800 *	41,800 *	41,800 *	100
105	79.4	371.9	41,100 *	41,100 *	41,100 *	41,100 *	41,100 *	41,100 *	105
110	78.6	370.5	40,400 *	40,400 *	40,400 *	40,400 *	40,400 *	40,400 *	110
115	77.9	369.0	39,800 *	39,800 *	39,800 *	39,800 *	39,800 *	39,800 *	115
120	77.1	367.4	39,200 *	39,200 *	39,200 *	39,200 *	39,200 *	39,200 *	120
125	76.2	365.8	38,600 *	38,600 *	38,600 *	38,600 *	38,600 *	38,600 *	125
130	75.4	364.0	38,000 *	38,000 *	38,000 *	38,000 *	38,000 *	38,000 *	130
135	74.6	362.2	37,400 *	37,400 *	37,400 *	37,400 *	37,400 *	37,400 *	135
140	73.8	360.4	36,900 *	36,900 *	36,900 *	36,900 *	36,900 *	36,900 *	140
145	73.0	358.4	36,400 *	36,400 *	36,400 *	36,400 *	36,400 *	36,400 *	145
150	72.2	356.3	35,900 *	35,900 *	35,900 *	35,900 *	35,900 *	35,900 *	150
160	70.5	352.0	34,900 *	34,900 *	34,900 *	34,900 *	34,900 *	34,900 *	160
170	68.8	347.3	34,100 *	34,100 *	34,100 *	34,100 *	34,100 *	34,100 *	170
180	67.1	342.2	33,200 *	33,200 *	33,200 *	33,200 *	33,200 *	33,200 *	180
190	65.4	336.7	32,500 *	32,500 *	32,500 *	32,500 *	32,500 *	32,500 *	190
200	63.6	330.9	31,700 *	31,700 *	31,700 *	31,700 *	31,700 *	31,700 *	200
210	61.8	324.6	31,100 *	31,100 *	31,100 *	31,100 *	31,100 *	31,100 *	210
220	59.9	317.8	30,400 *	30,400 *	30,400 *	30,400 *	30,400 *	30,400 *	220
230	58.1	310.6	29,800 *	29,800 *	29,800 *	29,800 *	29,800 *	29,800 *	230
240	56.1	302.8	29,300 *	29,300 *	29,300 *	29,300 *	29,300 *	29,300 *	240
250	54.1	294.5	28,800 *	28,800 *	28,800 *	28,800 *	28,800 *	28,800 *	250
260	52.1	285.6	27,500	28,300 *	28,300 *	28,300 *	28,300 *	28,300 *	260
270	50.0	276.0	24,600	27,900 *	27,900 *	27,900 *	27,900 *	27,900 *	270
280	47.8	265.6	22,000	27,500 *	27,500 *	27,500 *	27,500 *	27,500 *	280




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

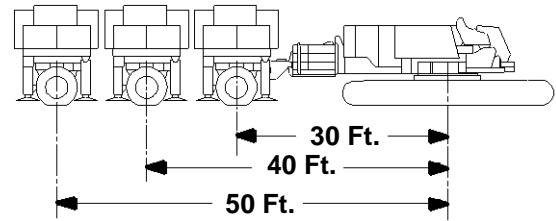

340 Ft. Boom
60 Ft. Jib, 30 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position	40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
100	80.7	393.8	42,300 *	42,300 *	42,300 *	42,300 *	42,300 *	100
105	80.0	392.5	41,600 *	41,600 *	41,600 *	41,600 *	41,600 *	105
110	79.2	391.2	41,000 *	41,000 *	41,000 *	41,000 *	41,000 *	110
115	78.5	389.8	40,300 *	40,300 *	40,300 *	40,300 *	40,300 *	115
120	77.7	388.3	39,700 *	39,700 *	39,700 *	39,700 *	39,700 *	120
125	77.0	386.7	39,100 *	39,100 *	39,100 *	39,100 *	39,100 *	125
130	76.2	385.1	38,600 *	38,600 *	38,600 *	38,600 *	38,600 *	130
135	75.4	383.4	38,000 *	38,000 *	38,000 *	38,000 *	38,000 *	135
140	74.7	381.6	37,500 *	37,500 *	37,500 *	37,500 *	37,500 *	140
145	73.9	379.8	37,000 *	37,000 *	37,000 *	37,000 *	37,000 *	145
150	73.1	377.8	36,500 *	36,500 *	36,500 *	36,500 *	36,500 *	150
160	71.6	373.7	35,600 *	35,600 *	35,600 *	35,600 *	35,600 *	160
170	70.0	369.3	34,700 *	34,700 *	34,700 *	34,700 *	34,700 *	170
180	68.4	364.6	33,900 *	33,900 *	33,900 *	33,900 *	33,900 *	180
190	66.7	359.5	33,100 *	33,100 *	33,100 *	33,100 *	33,100 *	190
200	65.1	354.0	32,400 *	32,400 *	32,400 *	32,400 *	32,400 *	200
210	63.4	348.1	31,700 *	31,700 *	31,700 *	31,700 *	31,700 *	210
220	61.7	341.8	31,000 *	31,000 *	31,000 *	31,000 *	31,000 *	220
230	59.9	335.1	30,400 *	30,400 *	30,400 *	30,400 *	30,400 *	230
240	58.2	328.0	29,900 *	29,900 *	29,900 *	29,900 *	29,900 *	240
250	56.3	320.4	29,400 *	29,400 *	29,400 *	29,400 *	29,400 *	250
260	54.5	312.2	28,900 *	28,900 *	28,900 *	28,900 *	28,900 *	260
270	52.5	303.5	28,400 *	28,400 *	28,400 *	28,400 *	28,400 *	270
280	50.6	294.1	28,000 *	28,000 *	28,000 *	28,000 *	28,000 *	280
290	48.5	284.1	27,600 *	25,800 *	27,600 *	27,600 *	27,600 *	290
300	46.4	273.3	27,300 *	23,300 *	27,300 *	27,300 *	27,300 *	300

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

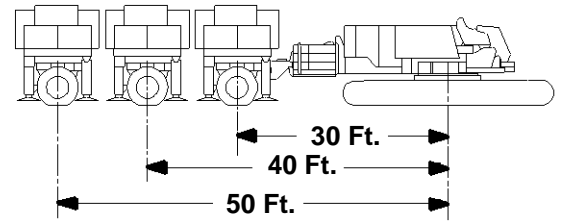

360 Ft. Boom
60 Ft. Jib, 30 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	40 Ft. Position	50 Ft. Position		Jib Oper. Rad. Feet
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
105	80.5	413.1	42,100 *	42,100 *	42,100 *	105
110	79.8	411.8	41,400 *	41,400 *	41,400 *	110
115	79.1	410.5	40,800 *	40,800 *	40,800 *	115
120	78.3	409.1	40,200 *	40,200 *	40,200 *	120
125	77.6	407.6	39,700 *	39,700 *	39,700 *	125
130	76.9	406.1	39,100 *	39,100 *	39,100 *	130
135	76.2	404.5	38,600 *	38,600 *	38,600 *	135
140	75.4	402.8	38,100 *	38,100 *	38,100 *	140
145	74.7	401.0	37,600 *	37,600 *	37,600 *	145
150	74.0	399.2	37,100 *	37,100 *	37,100 *	150
160	72.5	395.3	36,100 *	36,100 *	36,100 *	160
170	71.0	391.2	35,300 *	35,300 *	35,300 *	170
180	69.5	386.7	34,500 *	34,500 *	34,500 *	180
190	68.0	381.9	33,700 *	33,700 *	33,700 *	190
200	66.4	376.7	33,000 *	33,000 *	33,000 *	200
210	64.8	371.2	32,300 *	32,300 *	32,300 *	210
220	63.2	365.4	31,600 *	31,600 *	31,600 *	220
230	61.6	359.1	31,000 *	31,000 *	31,000 *	230
240	59.9	352.5	30,500 *	30,500 *	30,500 *	240
250	58.3	345.4	29,900 *	29,900 *	29,900 *	250
260	56.5	337.9	29,400 *	29,400 *	29,400 *	260
270	54.8	329.8	29,000 *	29,000 *	29,000 *	270
280	52.9	321.3	28,500 *	28,500 *	28,500 *	280
290	51.1	312.1	28,100 *	28,100 *	28,100 *	290
300	49.1	302.4	27,700 *	27,700 *	27,700 *	300
310	47.1	291.9	27,400 *	27,300	27,400 *	310




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
 ANSI B30.5
 Requirements

MAX-ER 2000 On 2250

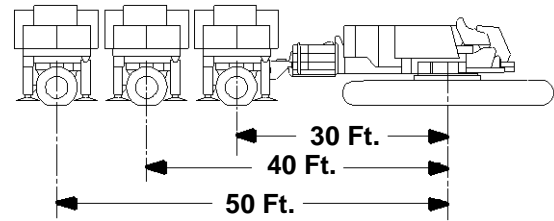

380 Ft. Boom 60 Ft. Jib, 30 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	50 Ft. Position
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds
105	80.9	433.6	42,500 *
110	80.3	432.4	41,900 *
115	79.6	431.1	41,300 *
120	78.9	429.8	40,700 *
125	78.2	428.4	40,100 *
130	77.5	426.9	39,600 *
135	76.8	425.4	39,100 *
140	76.1	423.8	38,600 *
145	75.5	422.1	38,100 *
150	74.8	420.4	37,600 *
160	73.4	416.7	36,700 *
170	71.9	412.8	35,800 *
180	70.5	408.6	35,000 *
190	69.1	404.0	34,200 *
200	67.6	399.2	33,500 *
210	66.1	394.0	32,800 *
220	64.6	388.5	32,200 *
230	63.1	382.6	31,600 *
240	61.5	376.4	31,000 *
250	60.0	369.8	30,500 *
260	58.3	362.8	30,000 *
270	56.7	355.3	29,500 *
280	55.0	347.4	29,000 *
290	53.3	339.0	28,600 *
300	51.5	330.1	28,200 *
310	49.7	320.6	27,800 *
320	47.8	310.4	27,500 *
330	45.9	299.6	27,200 *

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

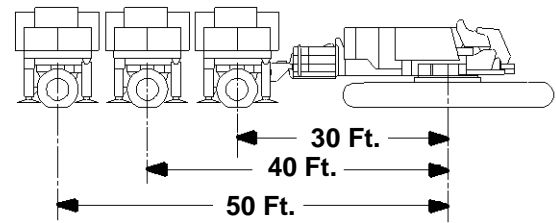

200 Ft. Boom
80 Ft. Jib, 5 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
60	80.8	286.7	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	60
65	79.8	285.7	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	65
70	78.7	284.6	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	70
75	77.7	283.3	54,600 *	54,600 *	54,600 *	54,600 *	54,600 *	54,600 *	75
80	76.6	282.0	53,700 *	53,700 *	53,700 *	53,700 *	53,700 *	53,700 *	80
85	75.6	280.6	52,900 *	52,900 *	52,900 *	52,900 *	52,900 *	52,900 *	85
90	74.5	279.1	52,100 *	52,100 *	52,100 *	52,100 *	52,100 *	52,100 *	90
95	73.4	277.4	51,300 *	51,300 *	51,300 *	51,300 *	51,300 *	51,300 *	95
100	72.4	275.7	50,600 *	50,600 *	50,600 *	50,600 *	50,600 *	50,600 *	100
105	71.3	273.9	49,800 *	49,800 *	49,800 *	49,800 *	49,800 *	49,800 *	105
110	70.2	271.9	49,100 *	49,100 *	49,100 *	49,100 *	49,100 *	49,100 *	110
115	69.1	269.8	48,400 *	48,400 *	48,400 *	48,400 *	48,400 *	48,400 *	115
120	68.0	267.7	47,800 *	47,800 *	47,800 *	47,800 *	47,800 *	47,800 *	120
125	66.9	265.4	47,100 *	47,100 *	47,100 *	47,100 *	47,100 *	47,100 *	125
130	65.7	263.0	46,500 *	46,500 *	46,500 *	46,500 *	46,500 *	46,500 *	130
135	64.6	260.4	45,800 *	45,800 *	45,800 *	45,800 *	45,800 *	45,800 *	135
140	63.5	257.8	45,200 *	45,200 *	45,200 *	45,200 *	45,200 *	45,200 *	140
145	62.3	255.0	44,700 *	44,700 *	44,700 *	44,700 *	44,700 *	44,700 *	145
150	61.1	252.1	44,100 *	44,100 *	44,100 *	44,100 *	44,100 *	44,100 *	150
160	58.7	245.8	43,000 *	43,000 *	43,000 *	43,000 *	43,000 *	43,000 *	160
170	56.2	238.9	42,000 *	42,000 *	42,000 *	42,000 *	42,000 *	42,000 *	170
180	53.7	231.4	40,600 *	40,600 *	40,600 *	40,600 *	40,600 *	40,600 *	180
190	51.1	223.1	38,300 *	38,300 *	38,300 *	38,300 *	38,300 *	38,300 *	190
200	48.3	214.0	36,300 *	36,300 *	36,300 *	36,300 *	36,300 *	36,300 *	200
210	45.4	203.9	34,400 *	34,400 *	34,400 *	34,400 *	34,400 *	34,400 *	210
220	42.4	192.8	32,800 *	32,800 *	32,800 *	32,800 *	32,800 *	32,800 *	220
230	39.1	180.3	31,200 *	31,200 *	31,200 *	31,200 *	31,200 *	31,200 *	230
240	35.6	166.2	29,900 *	29,900 *	29,900 *	29,900 *	29,900 *	29,900 *	240
250	31.8	150.0	28,600 *	28,600 *	28,600 *	28,600 *	28,600 *	28,600 *	250
260	27.4	130.8	27,400 *	27,400 *	27,400 *	27,400 *	27,400 *	27,400 *	260
270	22.1	106.9	26,400 *	26,400 *	26,400 *	26,400 *	26,400 *	26,400 *	270




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

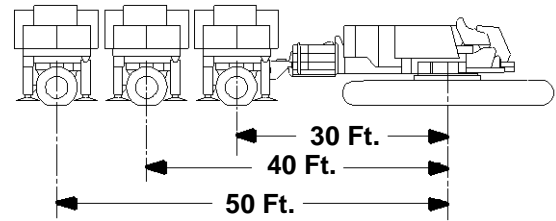

220 Ft. Boom
80 Ft. Jib, 5 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
65	80.5	306.1	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	65
70	79.5	305.1	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	70
75	78.5	303.9	55,000 *	55,000 *	55,000 *	55,000 *	55,000 *	55,000 *	75
80	77.5	302.7	54,200 *	54,200 *	54,200 *	54,200 *	54,200 *	54,200 *	80
85	76.6	301.4	53,400 *	53,400 *	53,400 *	53,400 *	53,400 *	53,400 *	85
90	75.6	299.9	52,700 *	52,700 *	52,700 *	52,700 *	52,700 *	52,700 *	90
95	74.6	298.4	51,900 *	51,900 *	51,900 *	51,900 *	51,900 *	51,900 *	95
100	73.6	296.8	51,200 *	51,200 *	51,200 *	51,200 *	51,200 *	51,200 *	100
105	72.6	295.1	50,500 *	50,500 *	50,500 *	50,500 *	50,500 *	50,500 *	105
110	71.6	293.3	49,800 *	49,800 *	49,800 *	49,800 *	49,800 *	49,800 *	110
115	70.6	291.4	49,200 *	49,200 *	49,200 *	49,200 *	49,200 *	49,200 *	115
120	69.5	289.4	48,500 *	48,500 *	48,500 *	48,500 *	48,500 *	48,500 *	120
125	68.5	287.3	47,900 *	47,900 *	47,900 *	47,900 *	47,900 *	47,900 *	125
130	67.5	285.1	47,300 *	47,300 *	47,300 *	47,300 *	47,300 *	47,300 *	130
135	66.4	282.8	46,700 *	46,700 *	46,700 *	46,700 *	46,700 *	46,700 *	135
140	65.4	280.3	46,100 *	46,100 *	46,100 *	46,100 *	46,100 *	46,100 *	140
145	64.3	277.8	45,500 *	45,500 *	45,500 *	45,500 *	45,500 *	45,500 *	145
150	63.2	275.1	45,000 *	45,000 *	45,000 *	45,000 *	45,000 *	45,000 *	150
160	61.0	269.4	43,900 *	43,900 *	43,900 *	43,900 *	43,900 *	43,900 *	160
170	58.8	263.1	42,900 *	42,900 *	42,900 *	42,900 *	42,900 *	42,900 *	170
180	56.5	256.3	42,000 *	42,000 *	42,000 *	42,000 *	42,000 *	42,000 *	180
190	54.1	248.9	41,000 *	41,000 *	41,000 *	41,000 *	41,000 *	41,000 *	190
200	51.7	240.8	38,800 *	38,800 *	38,800 *	38,800 *	38,800 *	38,800 *	200
210	49.2	232.0	36,900 *	36,900 *	36,900 *	36,900 *	36,900 *	36,900 *	210
220	46.5	222.3	35,100 *	35,100 *	35,100 *	35,100 *	35,100 *	35,100 *	220
230	43.8	211.7	33,500 *	33,500 *	33,500 *	33,500 *	33,500 *	33,500 *	230
240	40.8	199.9	32,000 *	32,000 *	32,000 *	32,000 *	32,000 *	32,000 *	240
250	37.7	186.9	30,600 *	30,600 *	30,600 *	30,600 *	30,600 *	30,600 *	250
260	34.3	172.1	29,400 *	29,400 *	29,400 *	29,400 *	29,400 *	29,400 *	260
270	30.6	155.2	28,300 *	28,300 *	28,300 *	28,300 *	28,300 *	28,300 *	270
280	26.3	135.2	27,200 *	27,200 *	27,200 *	27,200 *	27,200 *	27,200 *	280
290	21.3	110.3	26,300 *	26,300 *	26,300 *	26,300 *	26,300 *	26,300 *	290

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

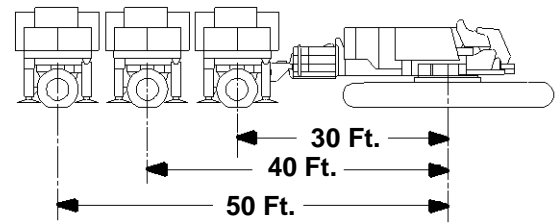

240 Ft. Boom
80 Ft. Jib, 5 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
70	80.2	325.5	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	70
75	79.2	324.4	55,200 *	55,200 *	55,200 *	55,200 *	55,200 *	55,200 *	75
80	78.3	323.3	54,500 *	54,500 *	54,500 *	54,500 *	54,500 *	54,500 *	80
85	77.4	322.0	53,800 *	53,800 *	53,800 *	53,800 *	53,800 *	53,800 *	85
90	76.5	320.7	53,100 *	53,100 *	53,100 *	53,100 *	53,100 *	53,100 *	90
95	75.6	319.3	52,400 *	52,400 *	52,400 *	52,400 *	52,400 *	52,400 *	95
100	74.6	317.8	51,700 *	51,700 *	51,700 *	51,700 *	51,700 *	51,700 *	100
105	73.7	316.2	51,000 *	51,000 *	51,000 *	51,000 *	51,000 *	51,000 *	105
110	72.8	314.6	50,400 *	50,400 *	50,400 *	50,400 *	50,400 *	50,400 *	110
115	71.8	312.8	49,700 *	49,700 *	49,700 *	49,700 *	49,700 *	49,700 *	115
120	70.9	310.9	49,100 *	49,100 *	49,100 *	49,100 *	49,100 *	49,100 *	120
125	69.9	309.0	48,500 *	48,500 *	48,500 *	48,500 *	48,500 *	48,500 *	125
130	69.0	306.9	47,900 *	47,900 *	47,900 *	47,900 *	47,900 *	47,900 *	130
135	68.0	304.8	47,400 *	47,400 *	47,400 *	47,400 *	47,400 *	47,400 *	135
140	67.0	302.5	46,800 *	46,800 *	46,800 *	46,800 *	46,800 *	46,800 *	140
145	66.0	300.1	46,200 *	46,200 *	46,200 *	46,200 *	46,200 *	46,200 *	145
150	65.0	297.7	45,700 *	45,700 *	45,700 *	45,700 *	45,700 *	45,700 *	150
160	63.0	292.4	44,700 *	44,700 *	44,700 *	44,700 *	44,700 *	44,700 *	160
170	61.0	286.7	43,700 *	43,700 *	43,700 *	43,700 *	43,700 *	43,700 *	170
180	58.9	280.5	42,800 *	42,800 *	42,800 *	42,800 *	42,800 *	42,800 *	180
190	56.7	273.7	42,000 *	42,000 *	42,000 *	42,000 *	42,000 *	42,000 *	190
200	54.5	266.4	41,200 *	41,200 *	41,200 *	41,200 *	41,200 *	41,200 *	200
210	52.3	258.5	39,300 *	39,300 *	39,300 *	39,300 *	39,300 *	39,300 *	210
220	49.9	249.9	37,400 *	37,400 *	37,400 *	37,400 *	37,400 *	37,400 *	220
230	47.5	240.6	35,700 *	35,700 *	35,700 *	35,700 *	35,700 *	35,700 *	230
240	44.9	230.4	34,100 *	34,100 *	34,100 *	34,100 *	34,100 *	34,100 *	240
250	42.3	219.2	32,700 *	32,700 *	32,700 *	32,700 *	32,700 *	32,700 *	250
260	39.4	206.9	31,400 *	31,400 *	31,400 *	31,400 *	31,400 *	31,400 *	260
270	36.4	193.2	29,100	30,100 *	30,100 *	30,100 *	30,100 *	30,100 *	270
280	33.2	177.8	26,600	29,000 *	29,000 *	29,000 *	29,000 *	29,000 *	280
290	29.5	160.2	24,300	28,000 *	28,000 *	28,000 *	28,000 *	28,000 *	290
300	25.4	139.4	22,200	27,000 *	27,000 *	27,000 *	27,000 *	27,000 *	300




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

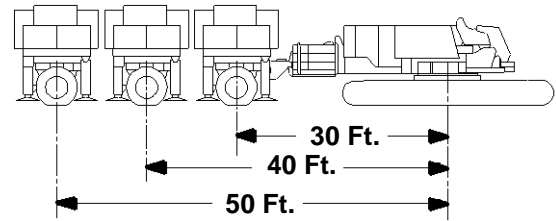

**260 Ft. Boom
80 Ft. Jib, 5 Degree Offset**


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
70	80.7	345.9	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	55,400 *	70
75	79.9	344.9	55,200 *	55,200 *	55,200 *	55,200 *	55,200 *	55,200 *	75
80	79.0	343.8	54,600 *	54,600 *	54,600 *	54,600 *	54,600 *	54,600 *	80
85	78.2	342.6	53,900 *	53,900 *	53,900 *	53,900 *	53,900 *	53,900 *	85
90	77.3	341.4	53,200 *	53,200 *	53,200 *	53,200 *	53,200 *	53,200 *	90
95	76.4	340.1	52,600 *	52,600 *	52,600 *	52,600 *	52,600 *	52,600 *	95
100	75.6	338.7	51,900 *	51,900 *	51,900 *	51,900 *	51,900 *	51,900 *	100
105	74.7	337.2	51,300 *	51,300 *	51,300 *	51,300 *	51,300 *	51,300 *	105
110	73.8	335.6	50,700 *	50,700 *	50,700 *	50,700 *	50,700 *	50,700 *	110
115	72.9	334.0	50,100 *	50,100 *	50,100 *	50,100 *	50,100 *	50,100 *	115
120	72.0	332.2	49,500 *	49,500 *	49,500 *	49,500 *	49,500 *	49,500 *	120
125	71.2	330.4	48,900 *	48,900 *	48,900 *	48,900 *	48,900 *	48,900 *	125
130	70.3	328.5	48,400 *	48,400 *	48,400 *	48,400 *	48,400 *	48,400 *	130
135	69.4	326.5	47,800 *	47,800 *	47,800 *	47,800 *	47,800 *	47,800 *	135
140	68.4	324.4	47,300 *	47,300 *	47,300 *	47,300 *	47,300 *	47,300 *	140
145	67.5	322.2	46,800 *	46,800 *	46,800 *	46,800 *	46,800 *	46,800 *	145
150	66.6	319.9	46,300 *	46,300 *	46,300 *	46,300 *	46,300 *	46,300 *	150
160	64.7	315.0	45,300 *	45,300 *	45,300 *	45,300 *	45,300 *	45,300 *	160
170	62.8	309.7	44,400 *	44,400 *	44,400 *	44,400 *	44,400 *	44,400 *	170
180	60.9	304.0	43,500 *	43,500 *	43,500 *	43,500 *	43,500 *	43,500 *	180
190	58.9	297.8	42,600 *	42,600 *	42,600 *	42,600 *	42,600 *	42,600 *	190
200	56.9	291.1	41,800 *	41,800 *	41,800 *	41,800 *	41,800 *	41,800 *	200
210	54.9	283.9	41,100 *	41,100 *	41,100 *	41,100 *	41,100 *	41,100 *	210
220	52.7	276.2	39,700 *	39,700 *	39,700 *	39,700 *	39,700 *	39,700 *	220
230	50.6	267.8	37,900 *	37,900 *	37,900 *	37,900 *	37,900 *	37,900 *	230
240	48.3	258.7	36,300 *	36,300 *	36,300 *	36,300 *	36,300 *	36,300 *	240
250	45.9	248.8	33,900	34,700 *	34,700 *	34,700 *	34,700 *	34,700 *	250
260	43.5	238.1	31,100	33,300 *	33,300 *	33,300 *	33,300 *	33,300 *	260
270	40.9	226.4	28,400	32,000 *	32,000 *	32,000 *	32,000 *	32,000 *	270
280	38.2	213.6	26,000	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	280
290	35.3	199.3	22,400 *	22,400 *	22,400 *	22,400 *	22,400 *	22,400 *	290
300	32.1	183.3	17,700 *	17,700 *	17,700 *	17,700 *	17,700 *	17,700 *	300
310	28.6	165.0	13,400 *	13,400 *	13,400 *	13,400 *	13,400 *	13,400 *	310
320	24.6	143.5	9,400 *	9,400 *	9,400 *	9,400 *	9,400 *	9,400 *	320

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

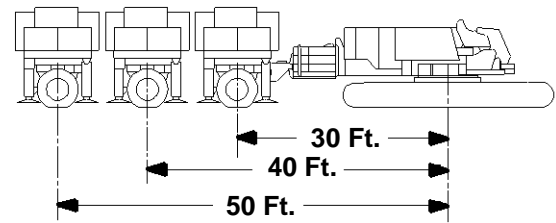

280 Ft. Boom
80 Ft. Jib, 5 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
75	80.9	365.0	54,100 *	54,100 *	54,100 *	54,100 *	54,100 *	54,100 *	75
80	80.1	364.0	53,500 *	53,500 *	53,500 *	53,500 *	53,500 *	53,500 *	80
85	79.2	362.9	52,900 *	52,900 *	52,900 *	52,900 *	52,900 *	52,900 *	85
90	78.4	361.7	52,300 *	52,300 *	52,300 *	52,300 *	52,300 *	52,300 *	90
95	77.6	360.5	51,700 *	51,700 *	51,700 *	51,700 *	51,700 *	51,700 *	95
100	76.8	359.2	51,100 *	51,100 *	51,100 *	51,100 *	51,100 *	51,100 *	100
105	76.0	357.8	50,600 *	50,600 *	50,600 *	50,600 *	50,600 *	50,600 *	105
110	75.1	356.3	50,000 *	50,000 *	50,000 *	50,000 *	50,000 *	50,000 *	110
115	74.3	354.8	49,500 *	49,500 *	49,500 *	49,500 *	49,500 *	49,500 *	115
120	73.5	353.1	48,900 *	48,900 *	48,900 *	48,900 *	48,900 *	48,900 *	120
125	72.6	351.4	48,400 *	48,400 *	48,400 *	48,400 *	48,400 *	48,400 *	125
130	71.8	349.6	47,900 *	47,900 *	47,900 *	47,900 *	47,900 *	47,900 *	130
135	71.0	347.7	47,400 *	47,400 *	47,400 *	47,400 *	47,400 *	47,400 *	135
140	70.1	345.8	47,000 *	47,000 *	47,000 *	47,000 *	47,000 *	47,000 *	140
145	69.2	343.7	46,500 *	46,500 *	46,500 *	46,500 *	46,500 *	46,500 *	145
150	68.4	341.6	46,100 *	46,100 *	46,100 *	46,100 *	46,100 *	46,100 *	150
160	66.6	337.0	45,200 *	45,200 *	45,200 *	45,200 *	45,200 *	45,200 *	160
170	64.9	332.1	44,300 *	44,300 *	44,300 *	44,300 *	44,300 *	44,300 *	170
180	63.1	326.8	43,500 *	43,500 *	43,500 *	43,500 *	43,500 *	43,500 *	180
190	61.3	321.0	42,700 *	42,700 *	42,700 *	42,700 *	42,700 *	42,700 *	190
200	59.4	314.9	42,000 *	42,000 *	42,000 *	42,000 *	42,000 *	42,000 *	200
210	57.5	308.2	41,300 *	41,300 *	41,300 *	41,300 *	41,300 *	41,300 *	210
220	55.6	301.1	40,600 *	40,600 *	40,600 *	40,600 *	40,600 *	40,600 *	220
230	53.6	293.4	39,900 *	39,900 *	39,900 *	39,900 *	39,900 *	39,900 *	230
240	51.5	285.2	37,100	39,300 *	39,300 *	39,300 *	39,300 *	39,300 *	240
250	49.4	276.4	34,000	38,800 *	38,800 *	38,800 *	38,800 *	38,800 *	250
260	47.2	266.8	31,100	37,600 *	37,600 *	37,600 *	37,600 *	37,600 *	260
270	44.9	256.5	28,400	36,200 *	35,900	36,200 *	36,200 *	36,200 *	270
280	42.5	245.2	26,000	35,000 *	33,100	35,000 *	35,000 *	35,000 *	280
290	40.0	233.0	23,700	33,800 *	30,500	33,800 *	33,800 *	33,800 *	290
300	37.4	219.6	21,500	32,700 *	28,200	32,700 *	32,700 *	32,700 *	300
310	34.5	204.8	19,500	31,700 *	25,900	31,700 *	31,700 *	31,700 *	310
320	31.5	188.1	17,600	30,300 *	23,800	30,800 *	30,100	30,800 *	320
330	28.1	169.2	15,800	26,900 *	21,800	29,900 *	27,900	29,900 *	330
340	24.2	146.8	14,100	23,500 *	19,900	29,100 *	25,800	29,100 *	340




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

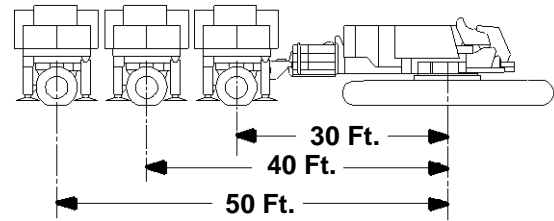

300 Ft. Boom
80 Ft. Jib, 5 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
80	80.6	384.4	53,300 *	53,300 *	53,300 *	53,300 *	53,300 *	53,300 *	80
85	79.8	383.4	52,700 *	52,700 *	52,700 *	52,700 *	52,700 *	52,700 *	85
90	79.0	382.3	52,200 *	52,200 *	52,200 *	52,200 *	52,200 *	52,200 *	90
95	78.3	381.1	51,600 *	51,600 *	51,600 *	51,600 *	51,600 *	51,600 *	95
100	77.5	379.9	51,100 *	51,100 *	51,100 *	51,100 *	51,100 *	51,100 *	100
105	76.7	378.5	50,600 *	50,600 *	50,600 *	50,600 *	50,600 *	50,600 *	105
110	75.9	377.1	50,100 *	50,100 *	50,100 *	50,100 *	50,100 *	50,100 *	110
115	75.2	375.7	49,600 *	49,600 *	49,600 *	49,600 *	49,600 *	49,600 *	115
120	74.4	374.1	49,100 *	49,100 *	49,100 *	49,100 *	49,100 *	49,100 *	120
125	73.6	372.5	48,600 *	48,600 *	48,600 *	48,600 *	48,600 *	48,600 *	125
130	72.8	370.8	48,100 *	48,100 *	48,100 *	48,100 *	48,100 *	48,100 *	130
135	72.0	369.1	47,700 *	47,700 *	47,700 *	47,700 *	47,700 *	47,700 *	135
140	71.2	367.2	47,200 *	47,200 *	47,200 *	47,200 *	47,200 *	47,200 *	140
145	70.4	365.3	46,700 *	46,700 *	46,700 *	46,700 *	46,700 *	46,700 *	145
150	69.6	363.3	46,400 *	46,400 *	46,400 *	46,400 *	46,400 *	46,400 *	150
160	68.0	359.0	45,500 *	45,500 *	45,500 *	45,500 *	45,500 *	45,500 *	160
170	66.3	354.4	44,700 *	44,700 *	44,700 *	44,700 *	44,700 *	44,700 *	170
180	64.6	349.4	43,900 *	43,900 *	43,900 *	43,900 *	43,900 *	43,900 *	180
190	62.9	344.1	43,200 *	43,200 *	43,200 *	43,200 *	43,200 *	43,200 *	190
200	61.2	338.3	42,400 *	42,400 *	42,400 *	42,400 *	42,400 *	42,400 *	200
210	59.4	332.2	41,700 *	41,700 *	41,700 *	41,700 *	41,700 *	41,700 *	210
220	57.6	325.6	41,100 *	41,100 *	41,100 *	41,100 *	41,100 *	41,100 *	220
230	55.8	318.6	39,700	40,500 *	40,500 *	40,500 *	40,500 *	40,500 *	230
240	53.9	311.0	36,300	39,900 *	39,900 *	39,900 *	39,900 *	39,900 *	240
250	52.0	302.9	33,200	39,300 *	39,300 *	39,300 *	39,300 *	39,300 *	250
260	50.0	294.3	30,300	38,800 *	38,800	38,800 *	38,800 *	38,800 *	260
270	47.9	285.0	27,700	38,100 *	35,100	38,100 *	38,100 *	38,100 *	270
280	45.8	275.0	25,200	36,800 *	32,300	36,800 *	36,800 *	36,800 *	280
290	43.6	264.2	22,900	35,500 *	29,800	35,500 *	35,500 *	35,500 *	290
300	41.3	252.5	20,700	34,400 *	27,400	34,400 *	34,100	34,400 *	300
310	38.9	239.8	18,700	33,300 *	25,100	33,300 *	31,600	33,300 *	310
320	36.3	225.9	16,800	31,100 *	23,000	32,300 *	29,300	32,300 *	320
330	33.6	210.5	15,000	27,800 *	21,100	31,400 *	27,100	31,400 *	330
340	30.6	193.3	13,300	24,600 *	19,200	30,500 *	25,100	30,500 *	340
350	27.3	173.7	11,500 *	21,500 *	17,400	29,700 *	23,100	29,700 *	350
360	23.5	150.7	9,600 *	18,400 *	15,700	27,700 *	21,200	27,700 *	360




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

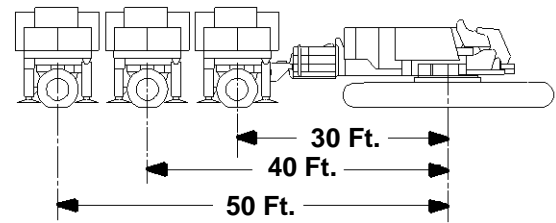

320 Ft. Boom
80 Ft. Jib, 5 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
85	80.3	403.8	52,800 *	52,800 *	52,800 *	52,800 *	52,800 *	52,800 *	85
90	79.6	402.8	52,300 *	52,300 *	52,300 *	52,300 *	52,300 *	52,300 *	90
95	78.9	401.6	51,800 *	51,800 *	51,800 *	51,800 *	51,800 *	51,800 *	95
100	78.1	400.5	51,300 *	51,300 *	51,300 *	51,300 *	51,300 *	51,300 *	100
105	77.4	399.2	50,800 *	50,800 *	50,800 *	50,800 *	50,800 *	50,800 *	105
110	76.7	397.9	50,300 *	50,300 *	50,300 *	50,300 *	50,300 *	50,300 *	110
115	75.9	396.5	49,800 *	49,800 *	49,800 *	49,800 *	49,800 *	49,800 *	115
120	75.2	395.0	49,300 *	49,300 *	49,300 *	49,300 *	49,300 *	49,300 *	120
125	74.4	393.5	48,900 *	48,900 *	48,900 *	48,900 *	48,900 *	48,900 *	125
130	73.7	391.9	48,400 *	48,400 *	48,400 *	48,400 *	48,400 *	48,400 *	130
135	72.9	390.3	48,000 *	48,000 *	48,000 *	48,000 *	48,000 *	48,000 *	135
140	72.2	388.5	47,500 *	47,500 *	47,500 *	47,500 *	47,500 *	47,500 *	140
145	71.4	386.7	47,100 *	47,100 *	47,100 *	47,100 *	47,100 *	47,100 *	145
150	70.7	384.8	46,700 *	46,700 *	46,700 *	46,700 *	46,700 *	46,700 *	150
160	69.1	380.8	45,900 *	45,900 *	45,900 *	45,900 *	45,900 *	45,900 *	160
170	67.6	376.4	45,100 *	45,100 *	45,100 *	45,100 *	45,100 *	45,100 *	170
180	66.0	371.8	44,400 *	44,400 *	44,400 *	44,400 *	44,400 *	44,400 *	180
190	64.4	366.8	43,700 *	43,700 *	43,700 *	43,700 *	43,700 *	43,700 *	190
200	62.8	361.4	42,900 *	42,900 *	42,900 *	42,900 *	42,900 *	42,900 *	200
210	61.1	355.7	42,300 *	42,300 *	42,300 *	42,300 *	42,300 *	42,300 *	210
220	59.5	349.5	40,200	41,600 *	41,600 *	41,600 *	41,600 *	41,600 *	220
230	57.8	343.0	36,500	41,000 *	41,000 *	41,000 *	41,000 *	41,000 *	230
240	56.0	336.0	33,000	40,400 *	40,400 *	40,400 *	40,400 *	40,400 *	240
250	54.2	328.6	29,900	39,800 *	38,000	39,800 *	39,800 *	39,800 *	250
260	52.4	320.6	27,000	39,300 *	34,800	39,300 *	39,300 *	39,300 *	260
270	50.5	312.1	24,400	38,800 *	31,800	38,800 *	38,800 *	38,800 *	270
280	48.6	303.0	21,900	38,300 *	29,000	38,300 *	36,200	38,300 *	280
290	46.6	293.3	19,600	37,200 *	26,500	37,200 *	33,400	37,200 *	290
300	44.6	282.9	17,400	35,500 *	24,100	36,000 *	30,800	36,000 *	300
310	42.4	271.7	15,400	31,800 *	21,800	34,900 *	28,300	34,900 *	310
320	40.2	259.5	13,200 *	28,300 *	19,700	33,900 *	26,000	33,900 *	320
330	37.8	246.4	11,000 *	25,000 *	17,800	32,900 *	23,800	32,900 *	330
340	35.3	232.0	9,000 *	21,900 *	15,900	32,000 *	21,800	32,000 *	340
350	32.6	216.1	7,000 *	18,800 *	14,100	31,100 *	19,800	31,100 *	350
360	29.7	198.3	5,100 *	15,900 *	12,200 *	28,600 *	18,000	30,300 *	360
370	26.5	178.1		13,100 *	10,300 *	25,300 *	16,200	29,500 *	370




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

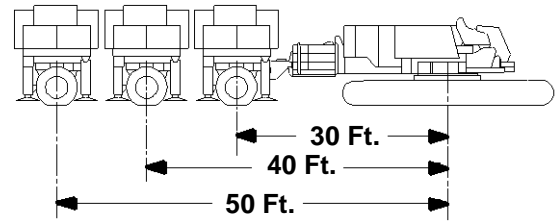

340 Ft. Boom
80 Ft. Jib, 5 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
85	80.8	424.2	52,500 *	52,500 *	52,500 *	52,500 *	85
90	80.1	423.2	52,000 *	52,000 *	52,000 *	52,000 *	90
95	79.4	422.1	51,500 *	51,500 *	51,500 *	51,500 *	95
100	78.7	421.0	51,100 *	51,100 *	51,100 *	51,100 *	100
105	78.0	419.8	50,600 *	50,600 *	50,600 *	50,600 *	105
110	77.3	418.6	50,100 *	50,100 *	50,100 *	50,100 *	110
115	76.6	417.2	49,700 *	49,700 *	49,700 *	49,700 *	115
120	75.9	415.9	49,300 *	49,300 *	49,300 *	49,300 *	120
125	75.2	414.4	48,800 *	48,800 *	48,800 *	48,800 *	125
130	74.5	412.9	48,400 *	48,400 *	48,400 *	48,400 *	130
135	73.8	411.3	48,000 *	48,000 *	48,000 *	48,000 *	135
140	73.1	409.7	47,600 *	47,600 *	47,600 *	47,600 *	140
145	72.3	407.9	47,200 *	47,200 *	47,200 *	47,200 *	145
150	71.6	406.1	46,800 *	46,800 *	46,800 *	46,800 *	150
160	70.2	402.3	46,000 *	46,000 *	46,000 *	46,000 *	160
170	68.7	398.2	45,300 *	45,300 *	45,300 *	45,300 *	170
180	67.2	393.8	44,600 *	44,600 *	44,600 *	44,600 *	180
190	65.7	389.1	43,900 *	43,900 *	43,900 *	43,900 *	190
200	64.2	384.1	43,200 *	43,200 *	43,200 *	43,200 *	200
210	62.6	378.7	42,600 *	42,600 *	42,600 *	42,600 *	210
220	61.1	373.0	42,000 *	42,000 *	42,000 *	42,000 *	220
230	59.5	366.9	41,400 *	41,400 *	41,400 *	41,400 *	230
240	57.9	360.3	40,700	40,800 *	40,800 *	40,800 *	240
250	56.2	353.4	37,200	40,200 *	40,200 *	40,200 *	250
260	54.5	346.1	34,000	39,700 *	39,700 *	39,700 *	260
270	52.8	338.2	31,000	39,200 *	38,500	39,200 *	270
280	51.0	329.9	28,300	38,700 *	35,500	38,700 *	280
290	49.2	321.0	25,700	38,200 *	32,600	38,200 *	290
300	47.3	311.6	23,300	37,700 *	30,000	37,700 *	300
310	45.4	301.5	21,100	36,500 *	27,600	36,500 *	310
320	43.4	290.6	19,000	35,400 *	25,200	35,400 *	320
330	41.3	279.0	17,000	34,400 *	23,100	34,400 *	330
340	39.1	266.4	15,100	33,400 *	21,000	33,400 *	340
350	36.8	252.8	13,200 *	32,500 *	19,100	32,500 *	350
360	34.4	237.9	11,200 *	29,500 *	17,300	31,700 *	360
370	31.8	221.5	9,200 *	26,200 *	15,500	30,800 *	370
380	29.0	203.2	7,400 *	23,100 *	13,800	30,100 *	380
390	25.8	182.4	5,600 *	20,100 *	12,100 *	29,300 *	390

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

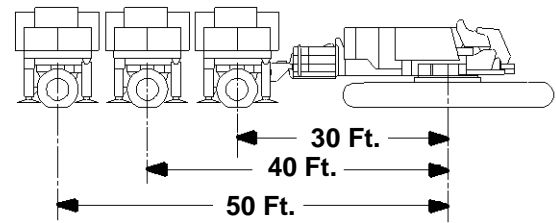

360 Ft. Boom 80 Ft. Jib, 5 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	50 Ft. Position	
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds
90	80.6	443.6	51,400 *	51,400 *
95	79.9	442.6	51,000 *	51,000 *
100	79.2	441.5	50,600 *	50,600 *
105	78.6	440.4	50,200 *	50,200 *
110	77.9	439.2	49,700 *	49,700 *
115	77.2	437.9	49,300 *	49,300 *
120	76.6	436.6	48,900 *	48,900 *
125	75.9	435.2	48,500 *	48,500 *
130	75.2	433.8	48,200 *	48,200 *
135	74.5	432.3	47,800 *	47,800 *
140	73.9	430.7	47,400 *	47,400 *
145	73.2	429.1	47,000 *	47,000 *
150	72.5	427.4	46,700 *	46,700 *
160	71.1	423.8	45,900 *	45,900 *
170	69.7	419.9	45,300 *	45,300 *
180	68.3	415.7	44,600 *	44,600 *
190	66.9	411.3	43,900 *	43,900 *
200	65.5	406.5	43,300 *	43,300 *
210	64.0	401.4	42,700 *	42,700 *
220	62.5	396.0	42,100 *	42,100 *
230	61.0	390.3	41,500 *	41,500 *
240	59.5	384.2	40,900 *	40,900 *
250	58.0	377.7	40,400 *	40,400 *
260	56.4	370.8	39,900 *	39,900 *
270	54.8	363.6	39,400 *	39,400 *
280	53.1	355.8	38,900 *	38,900 *
290	51.5	347.7	38,500 *	38,500 *
300	49.7	339.0	38,100 *	38,100 *
310	48.0	329.7	37,700 *	37,700 *
320	46.2	319.9	37,000 *	37,000 *
330	44.3	309.4	35,900 *	35,900 *
340	42.3	298.1	34,900 *	34,900 *
350	40.3	286.1	33,900 *	33,900 *
360	38.2	273.1	30,600 *	33,000 *
370	35.9	259.0	27,500 *	32,200 *
380	33.6	243.7	24,400 *	31,400 *
390	31.0	226.8	21,500 *	29,100 *
400	28.2	208.0	18,700 *	25,300 *
410	25.2	186.6	15,900 *	21,600 *

380 Ft. Boom 80 Ft. Jib, 5 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	50 Ft. Position
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds
90	81.0	463.9	50,800 *
95	80.3	463.0	50,500 *
100	79.7	461.9	50,100 *
105	79.1	460.9	49,700 *
110	78.4	459.7	49,300 *
115	77.8	458.5	48,900 *
120	77.2	457.3	48,600 *
125	76.5	456.0	48,200 *
130	75.9	454.6	47,800 *
135	75.2	453.2	47,500 *
140	74.6	451.7	47,200 *
145	73.9	450.1	46,800 *
150	73.3	448.5	46,500 *
160	72.0	445.0	45,800 *
170	70.6	441.4	45,200 *
180	69.3	437.4	44,500 *
190	68.0	433.2	43,900 *
200	66.6	428.7	43,300 *
210	65.2	423.9	42,700 *
220	63.8	418.7	42,100 *
230	62.4	413.3	41,600 *
240	61.0	407.6	41,000 *
250	59.5	401.5	40,500 *
260	58.1	395.1	40,000 *
270	56.6	388.3	39,600 *
280	55.0	381.1	39,100 *
290	53.5	373.4	38,600 *
300	51.9	365.4	38,200 *
310	50.2	356.8	37,800 *
320	48.6	347.8	37,500 *
330	46.8	338.1	37,100 *
340	45.1	327.9	36,300 *
350	43.2	317.0	35,300 *
360	41.3	305.4	34,400 *
370	39.3	293.0	33,500 *
380	37.3	279.6	32,000 *
390	35.1	265.1	28,200 *
400	32.8	249.3	24,500 *
410	30.3	232.0	21,000 *
420	27.6	212.6	17,600 *
430	24.6	190.7	14,300 *




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

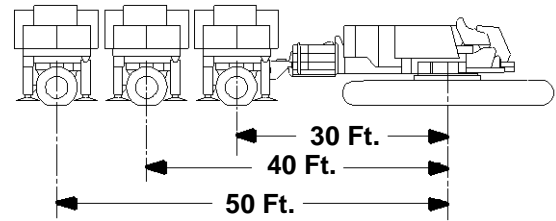

200 Ft. Boom

80 Ft. Jib, 15 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
75	80.9	280.8	48,500 *	48,500 *	48,500 *	48,500 *	48,500 *	48,500 *	75
80	79.8	279.5	47,900 *	47,900 *	47,900 *	47,900 *	47,900 *	47,900 *	80
85	78.8	278.0	47,400 *	47,400 *	47,400 *	47,400 *	47,400 *	47,400 *	85
90	77.7	276.5	45,800 *	45,800 *	45,800 *	45,800 *	45,800 *	45,800 *	90
95	76.6	274.9	44,300 *	44,300 *	44,300 *	44,300 *	44,300 *	44,300 *	95
100	75.5	273.1	42,800 *	42,800 *	42,800 *	42,800 *	42,800 *	42,800 *	100
105	74.4	271.2	41,500 *	41,500 *	41,500 *	41,500 *	41,500 *	41,500 *	105
110	73.3	269.3	40,200 *	40,200 *	40,200 *	40,200 *	40,200 *	40,200 *	110
115	72.2	267.2	39,000 *	39,000 *	39,000 *	39,000 *	39,000 *	39,000 *	115
120	71.1	265.0	37,900 *	37,900 *	37,900 *	37,900 *	37,900 *	37,900 *	120
125	70.0	262.7	36,800 *	36,800 *	36,800 *	36,800 *	36,800 *	36,800 *	125
130	68.8	260.3	35,800 *	35,800 *	35,800 *	35,800 *	35,800 *	35,800 *	130
135	67.7	257.7	34,900 *	34,900 *	34,900 *	34,900 *	34,900 *	34,900 *	135
140	66.5	255.0	34,000 *	34,000 *	34,000 *	34,000 *	34,000 *	34,000 *	140
145	65.4	252.2	33,100 *	33,100 *	33,100 *	33,100 *	33,100 *	33,100 *	145
150	64.2	249.2	32,300 *	32,300 *	32,300 *	32,300 *	32,300 *	32,300 *	150
160	61.7	242.9	30,800 *	30,800 *	30,800 *	30,800 *	30,800 *	30,800 *	160
170	59.2	235.9	29,400 *	29,400 *	29,400 *	29,400 *	29,400 *	29,400 *	170
180	56.7	228.2	28,200 *	28,200 *	28,200 *	28,200 *	28,200 *	28,200 *	180
190	54.0	219.8	27,000 *	27,000 *	27,000 *	27,000 *	27,000 *	27,000 *	190
200	51.2	210.6	26,000 *	26,000 *	26,000 *	26,000 *	26,000 *	26,000 *	200
210	48.2	200.3	25,100 *	25,100 *	25,100 *	25,100 *	25,100 *	25,100 *	210
220	45.1	189.0	24,200 *	24,200 *	24,200 *	24,200 *	24,200 *	24,200 *	220
230	41.8	176.2	23,400 *	23,400 *	23,400 *	23,400 *	23,400 *	23,400 *	230
240	38.2	161.7	22,700 *	22,700 *	22,700 *	22,700 *	22,700 *	22,700 *	240
250	34.2	145.0	22,100 *	22,100 *	22,100 *	22,100 *	22,100 *	22,100 *	250

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

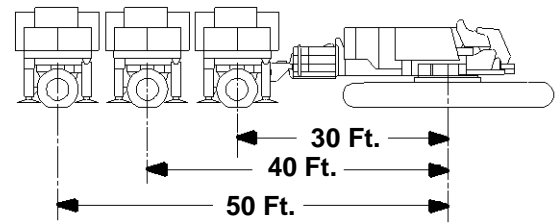

220 Ft. Boom
80 Ft. Jib, 15 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
80	80.5	300.1	48,100 *	48,100 *	48,100 *	48,100 *	48,100 *	48,100 *	80
85	79.6	298.8	47,600 *	47,600 *	47,600 *	47,600 *	47,600 *	47,600 *	85
90	78.6	297.3	47,100 *	47,100 *	47,100 *	47,100 *	47,100 *	47,100 *	90
95	77.6	295.8	45,600 *	45,600 *	45,600 *	45,600 *	45,600 *	45,600 *	95
100	76.5	294.2	44,200 *	44,200 *	44,200 *	44,200 *	44,200 *	44,200 *	100
105	75.5	292.5	42,800 *	42,800 *	42,800 *	42,800 *	42,800 *	42,800 *	105
110	74.5	290.7	41,600 *	41,600 *	41,600 *	41,600 *	41,600 *	41,600 *	110
115	73.5	288.7	40,400 *	40,400 *	40,400 *	40,400 *	40,400 *	40,400 *	115
120	72.5	286.7	39,200 *	39,200 *	39,200 *	39,200 *	39,200 *	39,200 *	120
125	71.4	284.6	38,200 *	38,200 *	38,200 *	38,200 *	38,200 *	38,200 *	125
130	70.4	282.3	37,200 *	37,200 *	37,200 *	37,200 *	37,200 *	37,200 *	130
135	69.3	280.0	36,200 *	36,200 *	36,200 *	36,200 *	36,200 *	36,200 *	135
140	68.3	277.5	35,300 *	35,300 *	35,300 *	35,300 *	35,300 *	35,300 *	140
145	67.2	274.9	34,400 *	34,400 *	34,400 *	34,400 *	34,400 *	34,400 *	145
150	66.1	272.2	33,600 *	33,600 *	33,600 *	33,600 *	33,600 *	33,600 *	150
160	63.9	266.5	32,100 *	32,100 *	32,100 *	32,100 *	32,100 *	32,100 *	160
170	61.6	260.1	30,700 *	30,700 *	30,700 *	30,700 *	30,700 *	30,700 *	170
180	59.3	253.3	29,400 *	29,400 *	29,400 *	29,400 *	29,400 *	29,400 *	180
190	56.9	245.7	28,300 *	28,300 *	28,300 *	28,300 *	28,300 *	28,300 *	190
200	54.4	237.5	27,200 *	27,200 *	27,200 *	27,200 *	27,200 *	27,200 *	200
210	51.9	228.6	26,200 *	26,200 *	26,200 *	26,200 *	26,200 *	26,200 *	210
220	49.2	218.7	25,300 *	25,300 *	25,300 *	25,300 *	25,300 *	25,300 *	220
230	46.3	207.9	24,500 *	24,500 *	24,500 *	24,500 *	24,500 *	24,500 *	230
240	43.4	195.9	23,800 *	23,800 *	23,800 *	23,800 *	23,800 *	23,800 *	240
250	40.2	182.5	23,100 *	23,100 *	23,100 *	23,100 *	23,100 *	23,100 *	250
260	36.7	167.4	22,400 *	22,400 *	22,400 *	22,400 *	22,400 *	22,400 *	260




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

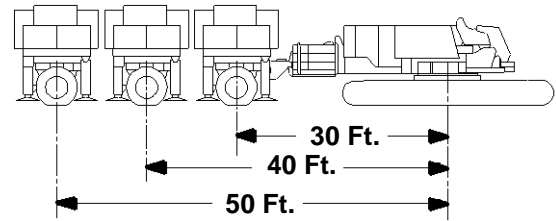

240 Ft. Boom

80 Ft. Jib, 15 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
85	80.2	319.4	47,700 *	47,700 *	47,700 *	47,700 *	47,700 *	47,700 *	85
90	79.3	318.1	47,200 *	47,200 *	47,200 *	47,200 *	47,200 *	47,200 *	90
95	78.4	316.6	46,800 *	46,800 *	46,800 *	46,800 *	46,800 *	46,800 *	95
100	77.4	315.1	45,400 *	45,400 *	45,400 *	45,400 *	45,400 *	45,400 *	100
105	76.5	313.5	44,100 *	44,100 *	44,100 *	44,100 *	44,100 *	44,100 *	105
110	75.5	311.8	42,800 *	42,800 *	42,800 *	42,800 *	42,800 *	42,800 *	110
115	74.6	310.0	41,600 *	41,600 *	41,600 *	41,600 *	41,600 *	41,600 *	115
120	73.6	308.2	40,500 *	40,500 *	40,500 *	40,500 *	40,500 *	40,500 *	120
125	72.7	306.2	39,500 *	39,500 *	39,500 *	39,500 *	39,500 *	39,500 *	125
130	71.7	304.1	38,400 *	38,400 *	38,400 *	38,400 *	38,400 *	38,400 *	130
135	70.7	301.9	37,500 *	37,500 *	37,500 *	37,500 *	37,500 *	37,500 *	135
140	69.7	299.7	36,600 *	36,600 *	36,600 *	36,600 *	36,600 *	36,600 *	140
145	68.7	297.3	35,700 *	35,700 *	35,700 *	35,700 *	35,700 *	35,700 *	145
150	67.7	294.8	34,900 *	34,900 *	34,900 *	34,900 *	34,900 *	34,900 *	150
160	65.7	289.5	33,300 *	33,300 *	33,300 *	33,300 *	33,300 *	33,300 *	160
170	63.6	283.7	31,900 *	31,900 *	31,900 *	31,900 *	31,900 *	31,900 *	170
180	61.5	277.4	30,600 *	30,600 *	30,600 *	30,600 *	30,600 *	30,600 *	180
190	59.3	270.6	29,500 *	29,500 *	29,500 *	29,500 *	29,500 *	29,500 *	190
200	57.1	263.2	28,400 *	28,400 *	28,400 *	28,400 *	28,400 *	28,400 *	200
210	54.8	255.2	27,400 *	27,400 *	27,400 *	27,400 *	27,400 *	27,400 *	210
220	52.4	246.5	26,400 *	26,400 *	26,400 *	26,400 *	26,400 *	26,400 *	220
230	49.9	237.0	25,600 *	25,600 *	25,600 *	25,600 *	25,600 *	25,600 *	230
240	47.4	226.6	24,800 *	24,800 *	24,800 *	24,800 *	24,800 *	24,800 *	240
250	44.6	215.2	24,100 *	24,100 *	24,100 *	24,100 *	24,100 *	24,100 *	250
260	41.8	202.6	23,400 *	23,400 *	23,400 *	23,400 *	23,400 *	23,400 *	260
270	38.7	188.6	22,800 *	22,800 *	22,800 *	22,800 *	22,800 *	22,800 *	270
280	35.3	172.8	22,200 *	22,200 *	22,200 *	22,200 *	22,200 *	22,200 *	280

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

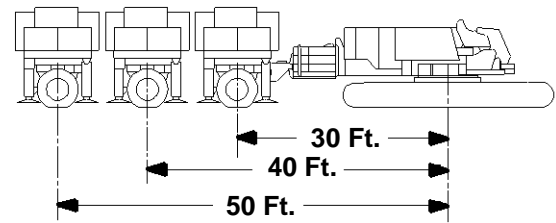

260 Ft. Boom
80 Ft. Jib, 15 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
85	80.8	339.9	47,800 *	47,800 *	47,800 *	47,800 *	47,800 *	47,800 *	85
90	79.9	338.7	47,300 *	47,300 *	47,300 *	47,300 *	47,300 *	47,300 *	90
95	79.1	337.4	46,900 *	46,900 *	46,900 *	46,900 *	46,900 *	46,900 *	95
100	78.2	335.9	46,400 *	46,400 *	46,400 *	46,400 *	46,400 *	46,400 *	100
105	77.3	334.4	45,400 *	45,400 *	45,400 *	45,400 *	45,400 *	45,400 *	105
110	76.4	332.9	44,200 *	44,200 *	44,200 *	44,200 *	44,200 *	44,200 *	110
115	75.5	331.2	43,000 *	43,000 *	43,000 *	43,000 *	43,000 *	43,000 *	115
120	74.6	329.4	41,900 *	41,900 *	41,900 *	41,900 *	41,900 *	41,900 *	120
125	73.7	327.6	40,800 *	40,800 *	40,800 *	40,800 *	40,800 *	40,800 *	125
130	72.8	325.7	39,800 *	39,800 *	39,800 *	39,800 *	39,800 *	39,800 *	130
135	71.9	323.6	38,800 *	38,800 *	38,800 *	38,800 *	38,800 *	38,800 *	135
140	71.0	321.5	37,900 *	37,900 *	37,900 *	37,900 *	37,900 *	37,900 *	140
145	70.1	319.3	37,000 *	37,000 *	37,000 *	37,000 *	37,000 *	37,000 *	145
150	69.2	317.0	36,200 *	36,200 *	36,200 *	36,200 *	36,200 *	36,200 *	150
160	67.3	312.1	34,600 *	34,600 *	34,600 *	34,600 *	34,600 *	34,600 *	160
170	65.4	306.7	33,200 *	33,200 *	33,200 *	33,200 *	33,200 *	33,200 *	170
180	63.4	301.0	31,900 *	31,900 *	31,900 *	31,900 *	31,900 *	31,900 *	180
190	61.4	294.7	30,700 *	30,700 *	30,700 *	30,700 *	30,700 *	30,700 *	190
200	59.4	287.9	29,600 *	29,600 *	29,600 *	29,600 *	29,600 *	29,600 *	200
210	57.3	280.7	28,500 *	28,500 *	28,500 *	28,500 *	28,500 *	28,500 *	210
220	55.1	272.8	27,600 *	27,600 *	27,600 *	27,600 *	27,600 *	27,600 *	220
230	52.9	264.3	26,700 *	26,700 *	26,700 *	26,700 *	26,700 *	26,700 *	230
240	50.6	255.1	25,900 *	25,900 *	25,900 *	25,900 *	25,900 *	25,900 *	240
250	48.2	245.1	25,100 *	25,100 *	25,100 *	25,100 *	25,100 *	25,100 *	250
260	45.7	234.2	24,400 *	24,400 *	24,400 *	24,400 *	24,400 *	24,400 *	260
270	43.1	222.3	23,700 *	23,700 *	23,700 *	23,700 *	23,700 *	23,700 *	270
280	40.3	209.1	21,700 *	21,700 *	21,700 *	21,700 *	21,700 *	21,700 *	280
290	37.3	194.5	18,100 *	18,100 *	18,100 *	18,100 *	18,100 *	18,100 *	290
300	34.1	178.1	14,700 *	14,700 *	14,700 *	14,700 *	14,700 *	14,700 *	300




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

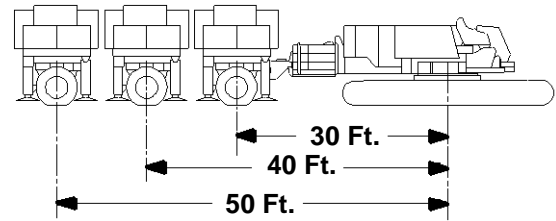

280 Ft. Boom

80 Ft. Jib, 15 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
90	80.7	359.0	47,000 *	47,000 *	47,000 *	47,000 *	47,000 *	47,000 *	90
95	79.9	357.7	46,600 *	46,600 *	46,600 *	46,600 *	46,600 *	46,600 *	95
100	79.0	356.4	46,200 *	46,200 *	46,200 *	46,200 *	46,200 *	46,200 *	100
105	78.2	355.0	45,800 *	45,800 *	45,800 *	45,800 *	45,800 *	45,800 *	105
110	77.4	353.5	45,400 *	45,400 *	45,400 *	45,400 *	45,400 *	45,400 *	110
115	76.5	351.9	45,000 *	45,000 *	45,000 *	45,000 *	45,000 *	45,000 *	115
120	75.7	350.3	44,700 *	44,700 *	44,700 *	44,700 *	44,700 *	44,700 *	120
125	74.8	348.5	44,300 *	44,300 *	44,300 *	44,300 *	44,300 *	44,300 *	125
130	74.0	346.7	44,000 *	44,000 *	44,000 *	44,000 *	44,000 *	44,000 *	130
135	73.1	344.8	43,600 *	43,600 *	43,600 *	43,600 *	43,600 *	43,600 *	135
140	72.3	342.9	43,300 *	43,300 *	43,300 *	43,300 *	43,300 *	43,300 *	140
145	71.4	340.8	42,900 *	42,900 *	42,900 *	42,900 *	42,900 *	42,900 *	145
150	70.6	338.6	42,600 *	42,600 *	42,600 *	42,600 *	42,600 *	42,600 *	150
160	68.8	334.0	42,000 *	42,000 *	42,000 *	42,000 *	42,000 *	42,000 *	160
170	67.0	329.1	41,400 *	41,400 *	41,400 *	41,400 *	41,400 *	41,400 *	170
180	65.2	323.7	39,900 *	39,900 *	39,900 *	39,900 *	39,900 *	39,900 *	180
190	63.4	317.9	38,400 *	38,400 *	38,400 *	38,400 *	38,400 *	38,400 *	190
200	61.5	311.7	37,000 *	37,000 *	37,000 *	37,000 *	37,000 *	37,000 *	200
210	59.6	305.0	35,700 *	35,700 *	35,700 *	35,700 *	35,700 *	35,700 *	210
220	57.6	297.7	34,500 *	34,500 *	34,500 *	34,500 *	34,500 *	34,500 *	220
230	55.6	290.0	33,400 *	33,400 *	33,400 *	33,400 *	33,400 *	33,400 *	230
240	53.5	281.7	32,300 *	32,300 *	32,300 *	32,300 *	32,300 *	32,300 *	240
250	51.3	272.7	31,400 *	31,400 *	31,400 *	31,400 *	31,400 *	31,400 *	250
260	49.1	263.0	30,500 *	30,500 *	30,500 *	30,500 *	30,500 *	30,500 *	260
270	46.8	252.5	29,500 *	29,700 *	29,700 *	29,700 *	29,700 *	29,700 *	270
280	44.4	241.1	27,000	28,900 *	28,900 *	28,900 *	28,900 *	28,900 *	280
290	41.8	228.6	24,600	28,200 *	28,200 *	28,200 *	28,200 *	28,200 *	290
300	39.1	214.9	22,300	27,600 *	27,600 *	27,600 *	27,600 *	27,600 *	300
310	36.2	199.7	20,200	27,000 *	26,600	27,000 *	27,000 *	27,000 *	310

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

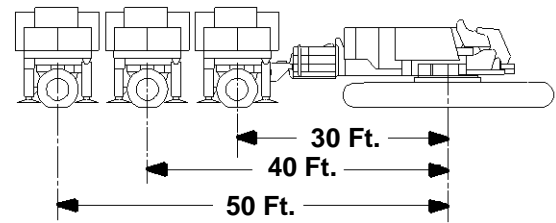

300 Ft. Boom
80 Ft. Jib, 15 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
95	80.4	378.3	46,600 *	46,600 *	46,600 *	46,600 *	46,600 *	46,600 *	95
100	79.6	377.0	46,200 *	46,200 *	46,200 *	46,200 *	46,200 *	46,200 *	100
105	78.8	375.7	45,800 *	45,800 *	45,800 *	45,800 *	45,800 *	45,800 *	105
110	78.1	374.3	45,400 *	45,400 *	45,400 *	45,400 *	45,400 *	45,400 *	110
115	77.3	372.8	45,100 *	45,100 *	45,100 *	45,100 *	45,100 *	45,100 *	115
120	76.5	371.3	44,800 *	44,800 *	44,800 *	44,800 *	44,800 *	44,800 *	120
125	75.7	369.6	44,400 *	44,400 *	44,400 *	44,400 *	44,400 *	44,400 *	125
130	74.9	367.9	44,100 *	44,100 *	44,100 *	44,100 *	44,100 *	44,100 *	130
135	74.1	366.1	43,800 *	43,800 *	43,800 *	43,800 *	43,800 *	43,800 *	135
140	73.3	364.3	43,500 *	43,500 *	43,500 *	43,500 *	43,500 *	43,500 *	140
145	72.5	362.3	43,100 *	43,100 *	43,100 *	43,100 *	43,100 *	43,100 *	145
150	71.6	360.3	42,800 *	42,800 *	42,800 *	42,800 *	42,800 *	42,800 *	150
160	70.0	356.0	42,300 *	42,300 *	42,300 *	42,300 *	42,300 *	42,300 *	160
170	68.3	351.3	41,700 *	41,700 *	41,700 *	41,700 *	41,700 *	41,700 *	170
180	66.6	346.3	41,200 *	41,200 *	41,200 *	41,200 *	41,200 *	41,200 *	180
190	64.9	340.9	39,700 *	39,700 *	39,700 *	39,700 *	39,700 *	39,700 *	190
200	63.2	335.1	38,300 *	38,300 *	38,300 *	38,300 *	38,300 *	38,300 *	200
210	61.4	328.9	36,900 *	36,900 *	36,900 *	36,900 *	36,900 *	36,900 *	210
220	59.6	322.3	35,700 *	35,700 *	35,700 *	35,700 *	35,700 *	35,700 *	220
230	57.7	315.2	34,600 *	34,600 *	34,600 *	34,600 *	34,600 *	34,600 *	230
240	55.8	307.5	33,500 *	33,500 *	33,500 *	33,500 *	33,500 *	33,500 *	240
250	53.9	299.4	32,500 *	32,500 *	32,500 *	32,500 *	32,500 *	32,500 *	250
260	51.9	290.6	31,600 *	31,600 *	31,600 *	31,600 *	31,600 *	31,600 *	260
270	49.8	281.2	28,900 *	30,800 *	30,800 *	30,800 *	30,800 *	30,800 *	270
280	47.6	271.0	26,300 *	30,000 *	30,000 *	30,000 *	30,000 *	30,000 *	280
290	45.4	260.0	23,900 *	29,200 *	29,200 *	29,200 *	29,200 *	29,200 *	290
300	43.0	248.2	21,700 *	28,500 *	28,300 *	28,500 *	28,500 *	28,500 *	300
310	40.6	235.2	19,500 *	27,900 *	26,000 *	27,900 *	27,900 *	27,900 *	310
320	37.9	221.0	17,600 *	27,300 *	23,800 *	27,300 *	27,300 *	27,300 *	320
330	35.1	205.2	15,700 *	26,800 *	21,700 *	26,800 *	26,800 *	26,800 *	330




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

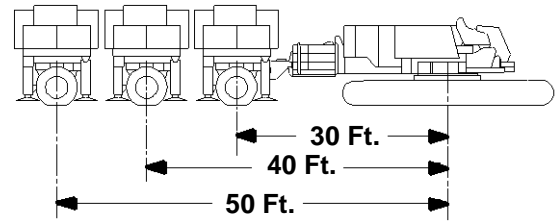

320 Ft. Boom

80 Ft. Jib, 15 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
95	80.9	398.8	46,500 *	46,500 *	46,500 *	46,500 *	46,500 *	46,500 *	95
100	80.2	397.6	46,200 *	46,200 *	46,200 *	46,200 *	46,200 *	46,200 *	100
105	79.4	396.3	45,800 *	45,800 *	45,800 *	45,800 *	45,800 *	45,800 *	105
110	78.7	395.0	45,500 *	45,500 *	45,500 *	45,500 *	45,500 *	45,500 *	110
115	77.9	393.6	45,200 *	45,200 *	45,200 *	45,200 *	45,200 *	45,200 *	115
120	77.2	392.1	44,900 *	44,900 *	44,900 *	44,900 *	44,900 *	44,900 *	120
125	76.4	390.6	44,500 *	44,500 *	44,500 *	44,500 *	44,500 *	44,500 *	125
130	75.7	389.0	44,200 *	44,200 *	44,200 *	44,200 *	44,200 *	44,200 *	130
135	74.9	387.3	43,900 *	43,900 *	43,900 *	43,900 *	43,900 *	43,900 *	135
140	74.2	385.6	43,600 *	43,600 *	43,600 *	43,600 *	43,600 *	43,600 *	140
145	73.4	383.7	43,300 *	43,300 *	43,300 *	43,300 *	43,300 *	43,300 *	145
150	72.6	381.8	43,000 *	43,000 *	43,000 *	43,000 *	43,000 *	43,000 *	150
160	71.1	377.8	42,400 *	42,400 *	42,400 *	42,400 *	42,400 *	42,400 *	160
170	69.5	373.4	41,900 *	41,900 *	41,900 *	41,900 *	41,900 *	41,900 *	170
180	67.9	368.7	41,400 *	41,400 *	41,400 *	41,400 *	41,400 *	41,400 *	180
190	66.3	363.6	40,900 *	40,900 *	40,900 *	40,900 *	40,900 *	40,900 *	190
200	64.7	358.2	39,500 *	39,500 *	39,500 *	39,500 *	39,500 *	39,500 *	200
210	63.0	352.4	38,100 *	38,100 *	38,100 *	38,100 *	38,100 *	38,100 *	210
220	61.3	346.2	36,900 *	36,900 *	36,900 *	36,900 *	36,900 *	36,900 *	220
230	59.6	339.6	35,700 *	35,700 *	35,700 *	35,700 *	35,700 *	35,700 *	230
240	57.8	332.6	34,600 *	34,600 *	34,600 *	34,600 *	34,600 *	34,600 *	240
250	56.0	325.0	31,600	33,600 *	33,600 *	33,600 *	33,600 *	33,600 *	250
260	54.2	317.0	28,600	32,700 *	32,700 *	32,700 *	32,700 *	32,700 *	260
270	52.3	308.4	25,800	31,800 *	31,800 *	31,800 *	31,800 *	31,800 *	270
280	50.4	299.2	23,200	31,000 *	30,300	31,000 *	31,000 *	31,000 *	280
290	48.3	289.4	20,800	30,200 *	27,700	30,200 *	30,200 *	30,200 *	290
300	46.3	278.8	18,500	29,500 *	25,200	29,500 *	29,500 *	29,500 *	300
310	44.1	267.4	16,400	28,800 *	22,900	28,800 *	28,800 *	28,800 *	310
320	41.8	255.0	14,400 *	28,200 *	20,700	28,200 *	26,900	28,200 *	320
330	39.4	241.6	12,100 *	26,500 *	18,600	27,600 *	24,700	27,600 *	330
340	36.8	226.9	9,900 *	23,200 *	16,600	27,100 *	22,500	27,100 *	340
350	34.1	210.6	7,800 *	20,000 *	14,700	26,600 *	20,500	26,600 *	350

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

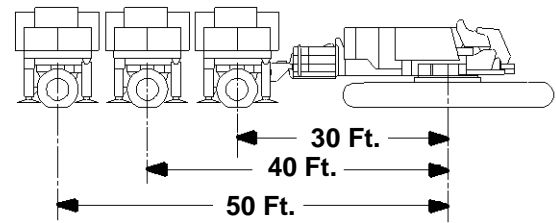

340 Ft. Boom
80 Ft. Jib, 15 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
100	80.6	418.1	46,100 *	46,100 *	46,100 *	46,100 *	100
105	79.9	416.9	45,800 *	45,800 *	45,800 *	45,800 *	105
110	79.2	415.7	45,400 *	45,400 *	45,400 *	45,400 *	110
115	78.5	414.3	45,100 *	45,100 *	45,100 *	45,100 *	115
120	77.8	412.9	44,800 *	44,800 *	44,800 *	44,800 *	120
125	77.1	411.5	44,500 *	44,500 *	44,500 *	44,500 *	125
130	76.4	410.0	44,200 *	44,200 *	44,200 *	44,200 *	130
135	75.7	408.4	43,900 *	43,900 *	43,900 *	43,900 *	135
140	74.9	406.7	43,600 *	43,600 *	43,600 *	43,600 *	140
145	74.2	405.0	43,300 *	43,300 *	43,300 *	43,300 *	145
150	73.5	403.1	43,100 *	43,100 *	43,100 *	43,100 *	150
160	72.0	399.3	42,500 *	42,500 *	42,500 *	42,500 *	160
170	70.6	395.2	42,000 *	42,000 *	42,000 *	42,000 *	170
180	69.1	390.7	41,500 *	41,500 *	41,500 *	41,500 *	180
190	67.5	386.0	41,000 *	41,000 *	41,000 *	41,000 *	190
200	66.0	380.9	40,600 *	40,600 *	40,600 *	40,600 *	200
210	64.4	375.5	39,300 *	39,300 *	39,300 *	39,300 *	210
220	62.9	369.7	38,000 *	38,000 *	38,000 *	38,000 *	220
230	61.3	363.5	36,800 *	36,800 *	36,800 *	36,800 *	230
240	59.6	357.0	35,700 *	35,700 *	35,700 *	35,700 *	240
250	58.0	350.0	34,700 *	34,700 *	34,700 *	34,700 *	250
260	56.2	342.5	33,700 *	33,700 *	33,700 *	33,700 *	260
270	54.5	334.6	32,500	32,800 *	32,800 *	32,800 *	270
280	52.7	326.2	29,700	32,000 *	32,000 *	32,000 *	280
290	50.9	317.2	27,000	31,200 *	31,200 *	31,200 *	290
300	49.0	307.6	24,500	30,400 *	30,400 *	30,400 *	300
310	47.0	297.4	22,200	29,700 *	28,700	29,700 *	310
320	45.0	286.4	20,000	29,100 *	26,300	29,100 *	320
330	42.9	274.5	17,900	28,500 *	24,000	28,500 *	330
340	40.6	261.7	16,000	27,900 *	21,900	27,900 *	340
350	38.3	247.8	14,100	27,400 *	19,800	27,400 *	350
360	35.8	232.6	12,000 *	26,900 *	17,900	26,900 *	360




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

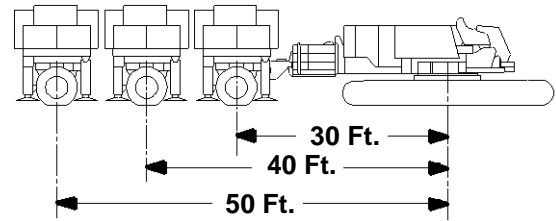

360 Ft. Boom 80 Ft. Jib, 15 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	50 Ft. Position	
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds
105	80.4	437.4	45,400 *	45,400 *
110	79.7	436.2	45,100 *	45,100 *
115	79.1	435.0	44,800 *	44,800 *
120	78.4	433.7	44,600 *	44,600 *
125	77.7	432.3	44,300 *	44,300 *
130	77.0	430.8	44,000 *	44,000 *
135	76.3	429.3	43,800 *	43,800 *
140	75.7	427.7	43,500 *	43,500 *
145	75.0	426.1	43,200 *	43,200 *
150	74.3	424.4	43,000 *	43,000 *
160	72.9	420.7	42,500 *	42,500 *
170	71.5	416.8	42,000 *	42,000 *
180	70.1	412.6	41,500 *	41,500 *
190	68.6	408.1	41,100 *	41,100 *
200	67.2	403.3	40,700 *	40,700 *
210	65.7	398.2	40,200 *	40,200 *
220	64.2	392.8	39,100 *	39,100 *
230	62.7	387.0	37,900 *	37,900 *
240	61.2	380.8	36,800 *	36,800 *
250	59.6	374.3	35,800 *	35,800 *
260	58.1	367.4	34,800 *	34,800 *
270	56.4	360.0	33,800 *	33,800 *
280	54.8	352.2	33,000 *	33,000 *
290	53.1	343.9	32,200 *	32,200 *
300	51.3	335.1	31,400 *	31,400 *
310	49.6	325.8	30,700 *	30,700 *
320	47.7	315.8	30,000 *	30,000 *
330	45.8	305.1	29,300 *	29,300 *
340	43.8	293.7	28,700 *	28,700 *
350	41.8	281.5	28,200 *	28,200 *
360	39.6	268.3	27,700 *	27,700 *
370	37.3	253.9	27,200 *	27,200 *
380	34.9	238.2	25,600 *	26,700 *

380 Ft. Boom 80 Ft. Jib, 15 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	50 Ft. Position
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds
105	80.8	457.9	45,100 *
110	80.2	456.8	44,800 *
115	79.6	455.6	44,600 *
120	78.9	454.3	44,300 *
125	78.3	453.0	44,000 *
130	77.6	451.6	43,800 *
135	77.0	450.2	43,600 *
140	76.3	448.6	43,300 *
145	75.7	447.1	43,100 *
150	75.0	445.4	42,800 *
160	73.7	442.0	42,400 *
170	72.3	438.3	42,000 *
180	71.0	434.3	41,500 *
190	69.6	430.0	41,100 *
200	68.3	425.5	40,700 *
210	66.9	420.6	40,300 *
220	65.5	415.5	39,900 *
230	64.1	410.0	39,000 *
240	62.6	404.2	37,800 *
250	61.1	398.1	36,800 *
260	59.7	391.6	35,800 *
270	58.1	384.7	34,800 *
280	56.6	377.5	33,900 *
290	55.0	369.8	33,100 *
300	53.4	361.6	32,300 *
310	51.8	353.0	31,600 *
320	50.1	343.8	30,900 *
330	48.3	334.1	30,200 *
340	46.5	323.7	29,600 *
350	44.7	312.7	29,000 *
360	42.7	300.9	28,400 *
370	40.7	288.3	27,900 *
380	38.6	274.6	27,400 *
390	36.4	259.8	27,000 *
400	34.0	243.7	26,200 *

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

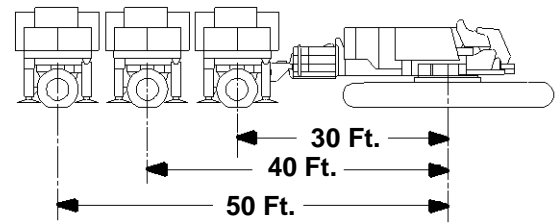

200 Ft. Boom
80 Ft. Jib, 30 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
95	80.1	269.3	24,900 *	24,900 *	24,900 *	24,900 *	24,900 *	24,900 *	95
100	79.0	267.6	24,300 *	24,300 *	24,300 *	24,300 *	24,300 *	24,300 *	100
105	77.9	265.7	23,700 *	23,700 *	23,700 *	23,700 *	23,700 *	23,700 *	105
110	76.8	263.7	23,200 *	23,200 *	23,200 *	23,200 *	23,200 *	23,200 *	110
115	75.7	261.6	22,700 *	22,700 *	22,700 *	22,700 *	22,700 *	22,700 *	115
120	74.5	259.4	22,200 *	22,200 *	22,200 *	22,200 *	22,200 *	22,200 *	120
125	73.4	257.1	21,800 *	21,800 *	21,800 *	21,800 *	21,800 *	21,800 *	125
130	72.2	254.6	21,300 *	21,300 *	21,300 *	21,300 *	21,300 *	21,300 *	130
135	71.0	252.0	20,900 *	20,900 *	20,900 *	20,900 *	20,900 *	20,900 *	135
140	69.8	249.3	20,500 *	20,500 *	20,500 *	20,500 *	20,500 *	20,500 *	140
145	68.6	246.4	20,100 *	20,100 *	20,100 *	20,100 *	20,100 *	20,100 *	145
150	67.4	243.4	19,800 *	19,800 *	19,800 *	19,800 *	19,800 *	19,800 *	150
160	64.9	236.9	19,100 *	19,100 *	19,100 *	19,100 *	19,100 *	19,100 *	160
170	62.3	229.8	18,400 *	18,400 *	18,400 *	18,400 *	18,400 *	18,400 *	170
180	59.7	222.0	17,900 *	17,900 *	17,900 *	17,900 *	17,900 *	17,900 *	180
190	56.9	213.4	17,400 *	17,400 *	17,400 *	17,400 *	17,400 *	17,400 *	190
200	54.0	203.9	16,900 *	16,900 *	16,900 *	16,900 *	16,900 *	16,900 *	200
210	51.0	193.3	16,500 *	16,500 *	16,500 *	16,500 *	16,500 *	16,500 *	210
220	47.8	181.6	16,100 *	16,100 *	16,100 *	16,100 *	16,100 *	16,100 *	220




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

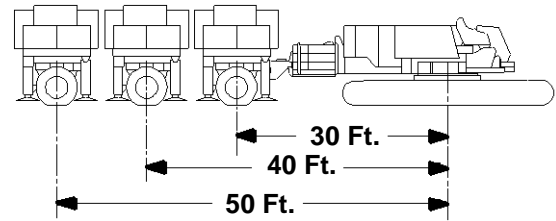

220 Ft. Boom
80 Ft. Jib, 30 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
95	80.8	290.2	25,300 *	25,300 *	25,300 *	25,300 *	25,300 *	25,300 *	95
100	79.8	288.5	24,700 *	24,700 *	24,700 *	24,700 *	24,700 *	24,700 *	100
105	78.8	286.8	24,200 *	24,200 *	24,200 *	24,200 *	24,200 *	24,200 *	105
110	77.7	285.0	23,700 *	23,700 *	23,700 *	23,700 *	23,700 *	23,700 *	110
115	76.7	283.0	23,200 *	23,200 *	23,200 *	23,200 *	23,200 *	23,200 *	115
120	75.6	281.0	22,700 *	22,700 *	22,700 *	22,700 *	22,700 *	22,700 *	120
125	74.6	278.8	22,300 *	22,300 *	22,300 *	22,300 *	22,300 *	22,300 *	125
130	73.5	276.6	21,800 *	21,800 *	21,800 *	21,800 *	21,800 *	21,800 *	130
135	72.4	274.2	21,400 *	21,400 *	21,400 *	21,400 *	21,400 *	21,400 *	135
140	71.3	271.7	21,000 *	21,000 *	21,000 *	21,000 *	21,000 *	21,000 *	140
145	70.2	269.1	20,600 *	20,600 *	20,600 *	20,600 *	20,600 *	20,600 *	145
150	69.1	266.3	20,300 *	20,300 *	20,300 *	20,300 *	20,300 *	20,300 *	150
160	66.9	260.5	19,600 *	19,600 *	19,600 *	19,600 *	19,600 *	19,600 *	160
170	64.6	254.0	19,000 *	19,000 *	19,000 *	19,000 *	19,000 *	19,000 *	170
180	62.2	247.0	18,400 *	18,400 *	18,400 *	18,400 *	18,400 *	18,400 *	180
190	59.7	239.3	17,900 *	17,900 *	17,900 *	17,900 *	17,900 *	17,900 *	190
200	57.2	231.0	17,400 *	17,400 *	17,400 *	17,400 *	17,400 *	17,400 *	200
210	54.5	221.8	17,000 *	17,000 *	17,000 *	17,000 *	17,000 *	17,000 *	210
220	51.7	211.7	16,600 *	16,600 *	16,600 *	16,600 *	16,600 *	16,600 *	220
230	48.8	200.5	16,200 *	16,200 *	16,200 *	16,200 *	16,200 *	16,200 *	230

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

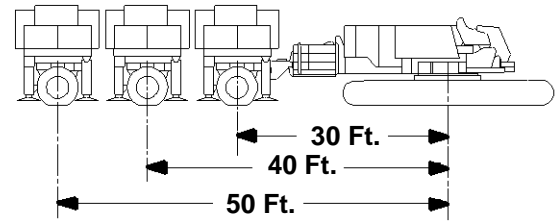

240 Ft. Boom
80 Ft. Jib, 30 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
100	80.5	309.3	25,100 *	25,100 *	25,100 *	25,100 *	25,100 *	25,100 *	100
105	79.5	307.7	24,600 *	24,600 *	24,600 *	24,600 *	24,600 *	24,600 *	105
110	78.6	306.0	24,100 *	24,100 *	24,100 *	24,100 *	24,100 *	24,100 *	110
115	77.6	304.2	23,600 *	23,600 *	23,600 *	23,600 *	23,600 *	23,600 *	115
120	76.6	302.3	23,100 *	23,100 *	23,100 *	23,100 *	23,100 *	23,100 *	120
125	75.6	300.3	22,700 *	22,700 *	22,700 *	22,700 *	22,700 *	22,700 *	125
130	74.6	298.2	22,300 *	22,300 *	22,300 *	22,300 *	22,300 *	22,300 *	130
135	73.7	296.0	21,900 *	21,900 *	21,900 *	21,900 *	21,900 *	21,900 *	135
140	72.6	293.7	21,500 *	21,500 *	21,500 *	21,500 *	21,500 *	21,500 *	140
145	71.6	291.3	21,100 *	21,100 *	21,100 *	21,100 *	21,100 *	21,100 *	145
150	70.6	288.8	20,800 *	20,800 *	20,800 *	20,800 *	20,800 *	20,800 *	150
160	68.5	283.4	20,100 *	20,100 *	20,100 *	20,100 *	20,100 *	20,100 *	160
170	66.4	277.5	19,500 *	19,500 *	19,500 *	19,500 *	19,500 *	19,500 *	170
180	64.2	271.2	18,900 *	18,900 *	18,900 *	18,900 *	18,900 *	18,900 *	180
190	62.0	264.2	18,400 *	18,400 *	18,400 *	18,400 *	18,400 *	18,400 *	190
200	59.7	256.7	17,900 *	17,900 *	17,900 *	17,900 *	17,900 *	17,900 *	200
210	57.4	248.5	17,400 *	17,400 *	17,400 *	17,400 *	17,400 *	17,400 *	210
220	54.9	239.6	17,000 *	17,000 *	17,000 *	17,000 *	17,000 *	17,000 *	220
230	52.4	229.8	16,600 *	16,600 *	16,600 *	16,600 *	16,600 *	16,600 *	230
240	49.7	219.1	16,300 *	16,300 *	16,300 *	16,300 *	16,300 *	16,300 *	240
250	46.9	207.4	16,000 *	16,000 *	16,000 *	16,000 *	16,000 *	16,000 *	250




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

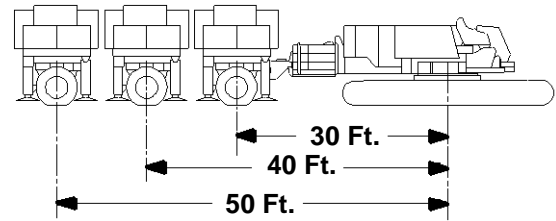

260 Ft. Boom

80 Ft. Jib, 30 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
105	80.2	328.5	25,000 *	25,000 *	25,000 *	25,000 *	25,000 *	25,000 *	105
110	79.3	327.0	24,500 *	24,500 *	24,500 *	24,500 *	24,500 *	24,500 *	110
115	78.4	325.3	24,000 *	24,000 *	24,000 *	24,000 *	24,000 *	24,000 *	115
120	77.5	323.5	23,600 *	23,600 *	23,600 *	23,600 *	23,600 *	23,600 *	120
125	76.6	321.6	23,200 *	23,200 *	23,200 *	23,200 *	23,200 *	23,200 *	125
130	75.6	319.7	22,800 *	22,800 *	22,800 *	22,800 *	22,800 *	22,800 *	130
135	74.7	317.6	22,400 *	22,400 *	22,400 *	22,400 *	22,400 *	22,400 *	135
140	73.8	315.5	22,000 *	22,000 *	22,000 *	22,000 *	22,000 *	22,000 *	140
145	72.8	313.3	21,600 *	21,600 *	21,600 *	21,600 *	21,600 *	21,600 *	145
150	71.9	310.9	21,300 *	21,300 *	21,300 *	21,300 *	21,300 *	21,300 *	150
160	70.0	305.9	20,600 *	20,600 *	20,600 *	20,600 *	20,600 *	20,600 *	160
170	68.0	300.5	20,000 *	20,000 *	20,000 *	20,000 *	20,000 *	20,000 *	170
180	66.0	294.7	19,400 *	19,400 *	19,400 *	19,400 *	19,400 *	19,400 *	180
190	64.0	288.3	18,900 *	18,900 *	18,900 *	18,900 *	18,900 *	18,900 *	190
200	61.9	281.4	18,400 *	18,400 *	18,400 *	18,400 *	18,400 *	18,400 *	200
210	59.7	274.0	17,900 *	17,900 *	17,900 *	17,900 *	17,900 *	17,900 *	210
220	57.5	266.0	17,500 *	17,500 *	17,500 *	17,500 *	17,500 *	17,500 *	220
230	55.3	257.3	17,100 *	17,100 *	17,100 *	17,100 *	17,100 *	17,100 *	230
240	52.9	247.9	16,800 *	16,800 *	16,800 *	16,800 *	16,800 *	16,800 *	240
250	50.4	237.6	16,400 *	16,400 *	16,400 *	16,400 *	16,400 *	16,400 *	250
260	47.9	226.4	14,300 *	14,300 *	14,300 *	14,300 *	14,300 *	14,300 *	260

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

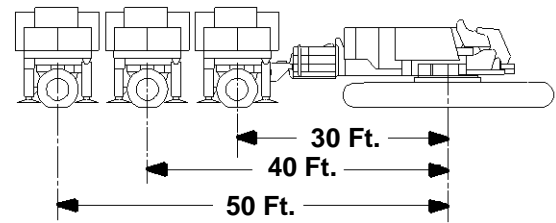

280 Ft. Boom
80 Ft. Jib, 30 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
105	80.6	349.7	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	105
110	79.8	348.2	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	110
115	78.9	346.6	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	115
120	78.1	345.0	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	120
125	77.2	343.2	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	125
130	76.4	341.4	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	130
135	75.5	339.5	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	135
140	74.6	337.5	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	140
145	73.8	335.4	27,600 *	27,600 *	27,600 *	27,600 *	27,600 *	27,600 *	145
150	72.9	333.2	27,200 *	27,200 *	27,200 *	27,200 *	27,200 *	27,200 *	150
160	71.1	328.6	26,400 *	26,400 *	26,400 *	26,400 *	26,400 *	26,400 *	160
170	69.3	323.6	25,700 *	25,700 *	25,700 *	25,700 *	25,700 *	25,700 *	170
180	67.4	318.1	25,000 *	25,000 *	25,000 *	25,000 *	25,000 *	25,000 *	180
190	65.6	312.3	24,400 *	24,400 *	24,400 *	24,400 *	24,400 *	24,400 *	190
200	63.6	306.0	23,800 *	23,800 *	23,800 *	23,800 *	23,800 *	23,800 *	200
210	61.7	299.2	23,200 *	23,200 *	23,200 *	23,200 *	23,200 *	23,200 *	210
220	59.7	291.9	22,700 *	22,700 *	22,700 *	22,700 *	22,700 *	22,700 *	220
230	57.6	284.0	22,200 *	22,200 *	22,200 *	22,200 *	22,200 *	22,200 *	230
240	55.5	275.5	21,800 *	21,800 *	21,800 *	21,800 *	21,800 *	21,800 *	240
250	53.3	266.3	21,400 *	21,400 *	21,400 *	21,400 *	21,400 *	21,400 *	250
260	51.0	256.4	21,000 *	21,000 *	21,000 *	21,000 *	21,000 *	21,000 *	260
270	48.6	245.7	20,600 *	20,600 *	20,600 *	20,600 *	20,600 *	20,600 *	270
280	46.1	234.0	20,300 *	20,300 *	20,300 *	20,300 *	20,300 *	20,300 *	280




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

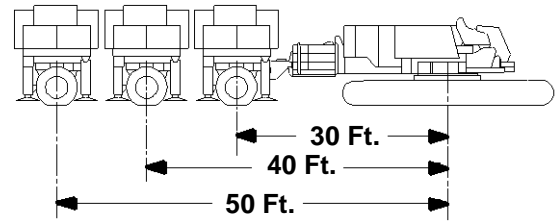

300 Ft. Boom
80 Ft. Jib, 30 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
110	80.4	368.9	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	110
115	79.6	367.4	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	115
120	78.8	365.9	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	120
125	78.0	364.2	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	125
130	77.1	362.5	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	130
135	76.3	360.7	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	135
140	75.5	358.8	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	140
145	74.7	356.9	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	145
150	73.9	354.8	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	150
160	72.2	350.5	26,900 *	26,900 *	26,900 *	26,900 *	26,900 *	26,900 *	160
170	70.5	345.8	26,200 *	26,200 *	26,200 *	26,200 *	26,200 *	26,200 *	170
180	68.8	340.7	25,500 *	25,500 *	25,500 *	25,500 *	25,500 *	25,500 *	180
190	67.0	335.3	24,900 *	24,900 *	24,900 *	24,900 *	24,900 *	24,900 *	190
200	65.2	329.4	24,300 *	24,300 *	24,300 *	24,300 *	24,300 *	24,300 *	200
210	63.4	323.2	23,700 *	23,700 *	23,700 *	23,700 *	23,700 *	23,700 *	210
220	61.6	316.4	23,200 *	23,200 *	23,200 *	23,200 *	23,200 *	23,200 *	220
230	59.7	309.2	22,700 *	22,700 *	22,700 *	22,700 *	22,700 *	22,700 *	230
240	57.7	301.4	22,300 *	22,300 *	22,300 *	22,300 *	22,300 *	22,300 *	240
250	55.7	293.1	21,800 *	21,800 *	21,800 *	21,800 *	21,800 *	21,800 *	250
260	53.7	284.2	21,400 *	21,400 *	21,400 *	21,400 *	21,400 *	21,400 *	260
270	51.6	274.6	21,100 *	21,100 *	21,100 *	21,100 *	21,100 *	21,100 *	270
280	49.4	264.2	20,700 *	20,700 *	20,700 *	20,700 *	20,700 *	20,700 *	280
290	47.0	253.0	20,400 *	20,400 *	20,400 *	20,400 *	20,400 *	20,400 *	290




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

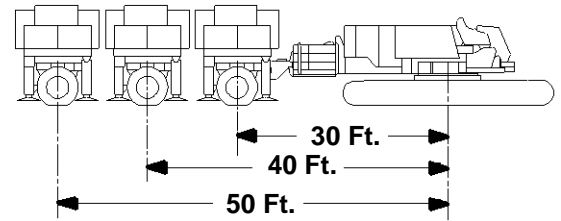

320 Ft. Boom
80 Ft. Jib, 30 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
110	80.9	389.6	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	110
115	80.1	388.2	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	115
120	79.4	386.7	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	120
125	78.6	385.1	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	125
130	77.8	383.5	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	130
135	77.1	381.8	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	135
140	76.3	380.1	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	140
145	75.5	378.2	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	145
150	74.7	376.3	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	150
160	73.2	372.2	27,300 *	27,300 *	27,300 *	27,300 *	27,300 *	27,300 *	160
170	71.6	367.8	26,600 *	26,600 *	26,600 *	26,600 *	26,600 *	26,600 *	170
180	69.9	363.0	25,900 *	25,900 *	25,900 *	25,900 *	25,900 *	25,900 *	180
190	68.3	357.9	25,300 *	25,300 *	25,300 *	25,300 *	25,300 *	25,300 *	190
200	66.7	352.5	24,700 *	24,700 *	24,700 *	24,700 *	24,700 *	24,700 *	200
210	65.0	346.6	24,200 *	24,200 *	24,200 *	24,200 *	24,200 *	24,200 *	210
220	63.2	340.4	23,700 *	23,700 *	23,700 *	23,700 *	23,700 *	23,700 *	220
230	61.5	333.7	23,200 *	23,200 *	23,200 *	23,200 *	23,200 *	23,200 *	230
240	59.7	326.5	22,700 *	22,700 *	22,700 *	22,700 *	22,700 *	22,700 *	240
250	57.9	318.9	22,300 *	22,300 *	22,300 *	22,300 *	22,300 *	22,300 *	250
260	56.0	310.7	21,900 *	21,900 *	21,900 *	21,900 *	21,900 *	21,900 *	260
270	54.1	302.0	21,500 *	21,500 *	21,500 *	21,500 *	21,500 *	21,500 *	270
280	52.1	292.6	21,100 *	21,100 *	21,100 *	21,100 *	21,100 *	21,100 *	280
290	50.0	282.6	20,800 *	20,800 *	20,800 *	20,800 *	20,800 *	20,800 *	290
300	47.8	271.8	19,600	20,500 *	20,500 *	20,500 *	20,500 *	20,500 *	300




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

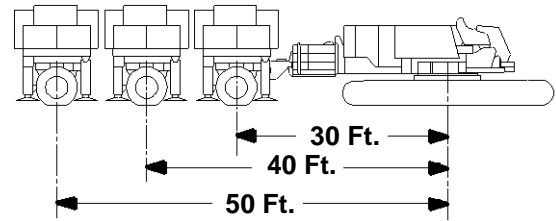

340 Ft. Boom
80 Ft. Jib, 30 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
115	80.6	408.8	27,700 *	27,700 *	27,700 *	27,700 *	115
120	79.9	407.4	27,700 *	27,700 *	27,700 *	27,700 *	120
125	79.2	406.0	27,700 *	27,700 *	27,700 *	27,700 *	125
130	78.4	404.4	27,700 *	27,700 *	27,700 *	27,700 *	130
135	77.7	402.8	27,700 *	27,700 *	27,700 *	27,700 *	135
140	77.0	401.1	27,700 *	27,700 *	27,700 *	27,700 *	140
145	76.2	399.4	27,700 *	27,700 *	27,700 *	27,700 *	145
150	75.5	397.6	27,700 *	27,700 *	27,700 *	27,700 *	150
160	74.0	393.7	27,700 *	27,700 *	27,700 *	27,700 *	160
170	72.5	389.6	27,100 *	27,100 *	27,100 *	27,100 *	170
180	71.0	385.1	26,400 *	26,400 *	26,400 *	26,400 *	180
190	69.5	380.3	25,800 *	25,800 *	25,800 *	25,800 *	190
200	67.9	375.2	25,200 *	25,200 *	25,200 *	25,200 *	200
210	66.3	369.7	24,600 *	24,600 *	24,600 *	24,600 *	210
220	64.7	363.8	24,100 *	24,100 *	24,100 *	24,100 *	220
230	63.1	357.6	23,600 *	23,600 *	23,600 *	23,600 *	230
240	61.4	350.9	23,200 *	23,200 *	23,200 *	23,200 *	240
250	59.7	343.9	22,700 *	22,700 *	22,700 *	22,700 *	250
260	58.0	336.3	22,300 *	22,300 *	22,300 *	22,300 *	260
270	56.2	328.3	21,900 *	21,900 *	21,900 *	21,900 *	270
280	54.4	319.7	21,600 *	21,600 *	21,600 *	21,600 *	280
290	52.5	310.6	21,200 *	21,200 *	21,200 *	21,200 *	290
300	50.6	300.8	20,900 *	20,900 *	20,900 *	20,900 *	300
310	48.6	290.4	20,600 *	20,600 *	20,600 *	20,600 *	310
320	46.5	279.1	20,400 *	20,400 *	20,400 *	20,400 *	320

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

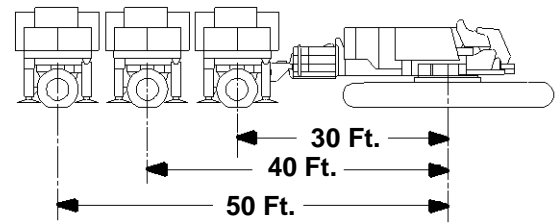

360 Ft. Boom

80 Ft. Jib, 30 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	50 Ft. Position	
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds
			120	80.4
125	79.7	426.7	27,700 *	27,700 *
130	79.0	425.2	27,700 *	27,700 *
135	78.3	423.7	27,700 *	27,700 *
140	77.6	422.1	27,700 *	27,700 *
145	76.9	420.5	27,700 *	27,700 *
150	76.2	418.7	27,700 *	27,700 *
160	74.8	415.1	27,700 *	27,700 *
170	73.4	411.1	27,500 *	27,500 *
180	71.9	406.9	26,800 *	26,800 *
190	70.5	402.4	26,200 *	26,200 *
200	69.0	397.5	25,600 *	25,600 *
210	67.5	392.4	25,100 *	25,100 *
220	66.0	386.9	24,600 *	24,600 *
230	64.5	381.0	24,100 *	24,100 *
240	62.9	374.8	23,600 *	23,600 *
250	61.3	368.2	23,200 *	23,200 *
260	59.7	361.2	22,700 *	22,700 *
270	58.1	353.7	22,400 *	22,400 *
280	56.4	345.8	22,000 *	22,000 *
290	54.7	337.4	21,600 *	21,600 *
300	52.9	328.5	21,300 *	21,300 *
310	51.1	319.0	21,000 *	21,000 *
320	49.2	308.8	20,700 *	20,700 *
330	47.2	297.9	20,500 *	20,500 *

380 Ft. Boom

80 Ft. Jib, 30 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	50 Ft. Position
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds
			120
125	80.2	447.4	27,700 *
130	79.5	446.0	27,700 *
135	78.8	444.5	27,700 *
140	78.2	443.0	27,700 *
145	77.5	441.4	27,700 *
150	76.8	439.8	27,700 *
160	75.5	436.3	27,700 *
170	74.2	432.6	27,700 *
180	72.8	428.6	27,200 *
190	71.4	424.3	26,600 *
200	70.0	419.7	26,000 *
210	68.6	414.8	25,500 *
220	67.2	409.6	25,000 *
230	65.8	404.1	24,500 *
240	64.3	398.2	24,000 *
250	62.8	392.0	23,600 *
260	61.3	385.5	23,200 *
270	59.7	378.5	22,800 *
280	58.2	371.2	22,400 *
290	56.6	363.4	22,000 *
300	54.9	355.1	21,700 *
310	53.2	346.3	21,400 *
320	51.5	337.0	21,100 *
330	49.7	327.1	20,800 *
340	47.9	316.5	20,600 *
350	46.0	305.3	20,300 *




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

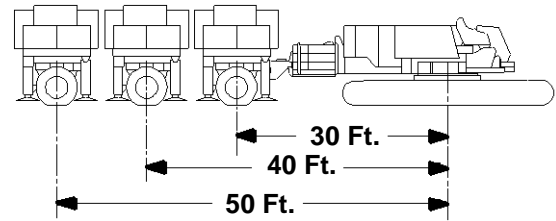

200 Ft. Boom
100 Ft. Jib, 5 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
65	80.6	306.2	45,800 *	45,800 *	45,800 *	45,800 *	45,800 *	45,800 *	65
70	79.6	305.1	45,000 *	45,000 *	45,000 *	45,000 *	45,000 *	45,000 *	70
75	78.7	304.0	44,200 *	44,200 *	44,200 *	44,200 *	44,200 *	44,200 *	75
80	77.7	302.7	43,400 *	43,400 *	43,400 *	43,400 *	43,400 *	43,400 *	80
85	76.7	301.4	42,700 *	42,700 *	42,700 *	42,700 *	42,700 *	42,700 *	85
90	75.7	300.0	42,000 *	42,000 *	42,000 *	42,000 *	42,000 *	42,000 *	90
95	74.7	298.5	41,300 *	41,300 *	41,300 *	41,300 *	41,300 *	41,300 *	95
100	73.7	296.9	40,600 *	40,600 *	40,600 *	40,600 *	40,600 *	40,600 *	100
105	72.7	295.2	39,900 *	39,900 *	39,900 *	39,900 *	39,900 *	39,900 *	105
110	71.7	293.4	39,200 *	39,200 *	39,200 *	39,200 *	39,200 *	39,200 *	110
115	70.7	291.5	38,600 *	38,600 *	38,600 *	38,600 *	38,600 *	38,600 *	115
120	69.7	289.5	37,900 *	37,900 *	37,900 *	37,900 *	37,900 *	37,900 *	120
125	68.7	287.4	37,200 *	37,200 *	37,200 *	37,200 *	37,200 *	37,200 *	125
130	67.6	285.2	36,500 *	36,500 *	36,500 *	36,500 *	36,500 *	36,500 *	130
135	66.6	282.8	35,800 *	35,800 *	35,800 *	35,800 *	35,800 *	35,800 *	135
140	65.5	280.4	35,200 *	35,200 *	35,200 *	35,200 *	35,200 *	35,200 *	140
145	64.5	277.8	34,500 *	34,500 *	34,500 *	34,500 *	34,500 *	34,500 *	145
150	63.4	275.2	33,900 *	33,900 *	33,900 *	33,900 *	33,900 *	33,900 *	150
160	61.2	269.4	32,700 *	32,700 *	32,700 *	32,700 *	32,700 *	32,700 *	160
170	59.0	263.2	31,500 *	31,500 *	31,500 *	31,500 *	31,500 *	31,500 *	170
180	56.7	256.4	30,400 *	30,400 *	30,400 *	30,400 *	30,400 *	30,400 *	180
190	54.3	249.0	29,400 *	29,400 *	29,400 *	29,400 *	29,400 *	29,400 *	190
200	51.9	240.9	28,400 *	28,400 *	28,400 *	28,400 *	28,400 *	28,400 *	200
210	49.3	232.1	27,500 *	27,500 *	27,500 *	27,500 *	27,500 *	27,500 *	210
220	46.7	222.4	26,600 *	26,600 *	26,600 *	26,600 *	26,600 *	26,600 *	220
230	43.9	211.8	25,500 *	25,500 *	25,500 *	25,500 *	25,500 *	25,500 *	230
240	41.0	200.0	24,300 *	24,300 *	24,300 *	24,300 *	24,300 *	24,300 *	240
250	37.9	186.9	23,100 *	23,100 *	23,100 *	23,100 *	23,100 *	23,100 *	250
260	34.5	172.2	22,100 *	22,100 *	22,100 *	22,100 *	22,100 *	22,100 *	260
270	30.8	155.3	21,200 *	21,200 *	21,200 *	21,200 *	21,200 *	21,200 *	270
280	26.5	135.3	20,300 *	20,300 *	20,300 *	20,300 *	20,300 *	20,300 *	280
290	21.4	110.5	19,500 *	19,500 *	19,500 *	19,500 *	19,500 *	19,500 *	290

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

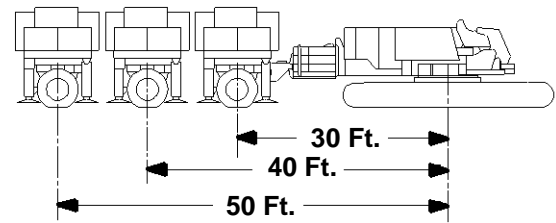

220 Ft. Boom
100 Ft. Jib, 5 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
70	80.3	325.6	45,200 *	45,200 *	45,200 *	45,200 *	45,200 *	45,200 *	70
75	79.4	324.5	44,500 *	44,500 *	44,500 *	44,500 *	44,500 *	44,500 *	75
80	78.5	323.3	43,800 *	43,800 *	43,800 *	43,800 *	43,800 *	43,800 *	80
85	77.6	322.1	43,100 *	43,100 *	43,100 *	43,100 *	43,100 *	43,100 *	85
90	76.6	320.8	42,400 *	42,400 *	42,400 *	42,400 *	42,400 *	42,400 *	90
95	75.7	319.4	41,800 *	41,800 *	41,800 *	41,800 *	41,800 *	41,800 *	95
100	74.8	317.9	41,100 *	41,100 *	41,100 *	41,100 *	41,100 *	41,100 *	100
105	73.8	316.3	40,500 *	40,500 *	40,500 *	40,500 *	40,500 *	40,500 *	105
110	72.9	314.6	39,800 *	39,800 *	39,800 *	39,800 *	39,800 *	39,800 *	110
115	72.0	312.8	39,200 *	39,200 *	39,200 *	39,200 *	39,200 *	39,200 *	115
120	71.0	311.0	38,600 *	38,600 *	38,600 *	38,600 *	38,600 *	38,600 *	120
125	70.1	309.0	38,000 *	38,000 *	38,000 *	38,000 *	38,000 *	38,000 *	125
130	69.1	307.0	37,400 *	37,400 *	37,400 *	37,400 *	37,400 *	37,400 *	130
135	68.1	304.8	36,700 *	36,700 *	36,700 *	36,700 *	36,700 *	36,700 *	135
140	67.2	302.6	36,100 *	36,100 *	36,100 *	36,100 *	36,100 *	36,100 *	140
145	66.2	300.2	35,500 *	35,500 *	35,500 *	35,500 *	35,500 *	35,500 *	145
150	65.2	297.7	34,900 *	34,900 *	34,900 *	34,900 *	34,900 *	34,900 *	150
160	63.2	292.5	33,700 *	33,700 *	33,700 *	33,700 *	33,700 *	33,700 *	160
170	61.1	286.8	32,600 *	32,600 *	32,600 *	32,600 *	32,600 *	32,600 *	170
180	59.0	280.5	31,500 *	31,500 *	31,500 *	31,500 *	31,500 *	31,500 *	180
190	56.9	273.8	30,500 *	30,500 *	30,500 *	30,500 *	30,500 *	30,500 *	190
200	54.7	266.5	29,500 *	29,500 *	29,500 *	29,500 *	29,500 *	29,500 *	200
210	52.4	258.6	28,600 *	28,600 *	28,600 *	28,600 *	28,600 *	28,600 *	210
220	50.1	250.0	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	220
230	47.6	240.6	26,900 *	26,900 *	26,900 *	26,900 *	26,900 *	26,900 *	230
240	45.1	230.4	26,000 *	26,000 *	26,000 *	26,000 *	26,000 *	26,000 *	240
250	42.4	219.3	24,800 *	24,800 *	24,800 *	24,800 *	24,800 *	24,800 *	250
260	39.6	207.0	23,700 *	23,700 *	23,700 *	23,700 *	23,700 *	23,700 *	260
270	36.6	193.3	22,700 *	22,700 *	22,700 *	22,700 *	22,700 *	22,700 *	270
280	33.3	177.9	21,800 *	21,800 *	21,800 *	21,800 *	21,800 *	21,800 *	280
290	29.7	160.3	21,000 *	21,000 *	21,000 *	21,000 *	21,000 *	21,000 *	290
300	25.6	139.5	20,200 *	20,200 *	20,200 *	20,200 *	20,200 *	20,200 *	300
310	20.7	113.8	19,400 *	19,400 *	19,400 *	19,400 *	19,400 *	19,400 *	310




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

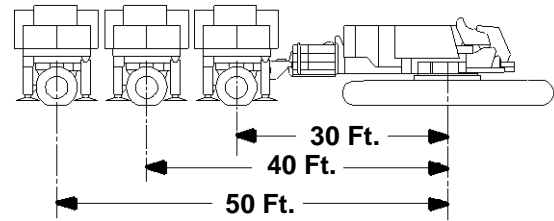

240 Ft. Boom

100 Ft. Jib, 5 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
70	80.9	345.9	45,400 *	45,400 *	45,400 *	45,400 *	45,400 *	45,400 *	70
75	80.0	344.9	44,700 *	44,700 *	44,700 *	44,700 *	44,700 *	44,700 *	75
80	79.2	343.9	44,100 *	44,100 *	44,100 *	44,100 *	44,100 *	44,100 *	80
85	78.3	342.7	43,400 *	43,400 *	43,400 *	43,400 *	43,400 *	43,400 *	85
90	77.4	341.5	42,800 *	42,800 *	42,800 *	42,800 *	42,800 *	42,800 *	90
95	76.6	340.1	42,100 *	42,100 *	42,100 *	42,100 *	42,100 *	42,100 *	95
100	75.7	338.7	41,500 *	41,500 *	41,500 *	41,500 *	41,500 *	41,500 *	100
105	74.8	337.2	40,900 *	40,900 *	40,900 *	40,900 *	40,900 *	40,900 *	105
110	73.9	335.7	40,300 *	40,300 *	40,300 *	40,300 *	40,300 *	40,300 *	110
115	73.1	334.0	39,700 *	39,700 *	39,700 *	39,700 *	39,700 *	39,700 *	115
120	72.2	332.3	39,200 *	39,200 *	39,200 *	39,200 *	39,200 *	39,200 *	120
125	71.3	330.5	38,600 *	38,600 *	38,600 *	38,600 *	38,600 *	38,600 *	125
130	70.4	328.5	38,000 *	38,000 *	38,000 *	38,000 *	38,000 *	38,000 *	130
135	69.5	326.5	37,500 *	37,500 *	37,500 *	37,500 *	37,500 *	37,500 *	135
140	68.6	324.4	36,900 *	36,900 *	36,900 *	36,900 *	36,900 *	36,900 *	140
145	67.7	322.2	36,300 *	36,300 *	36,300 *	36,300 *	36,300 *	36,300 *	145
150	66.7	320.0	35,700 *	35,700 *	35,700 *	35,700 *	35,700 *	35,700 *	150
160	64.9	315.1	34,600 *	34,600 *	34,600 *	34,600 *	34,600 *	34,600 *	160
170	63.0	309.8	33,500 *	33,500 *	33,500 *	33,500 *	33,500 *	33,500 *	170
180	61.0	304.1	32,400 *	32,400 *	32,400 *	32,400 *	32,400 *	32,400 *	180
190	59.1	297.9	31,400 *	31,400 *	31,400 *	31,400 *	31,400 *	31,400 *	190
200	57.1	291.2	30,500 *	30,500 *	30,500 *	30,500 *	30,500 *	30,500 *	200
210	55.0	284.0	29,600 *	29,600 *	29,600 *	29,600 *	29,600 *	29,600 *	210
220	52.9	276.2	28,700 *	28,700 *	28,700 *	28,700 *	28,700 *	28,700 *	220
230	50.7	267.8	27,900 *	27,900 *	27,900 *	27,900 *	27,900 *	27,900 *	230
240	48.4	258.7	27,100 *	27,100 *	27,100 *	27,100 *	27,100 *	27,100 *	240
250	46.1	248.9	26,400 *	26,400 *	26,400 *	26,400 *	26,400 *	26,400 *	250
260	43.6	238.2	25,300 *	25,300 *	25,300 *	25,300 *	25,300 *	25,300 *	260
270	41.0	226.5	24,300 *	24,300 *	24,300 *	24,300 *	24,300 *	24,300 *	270
280	38.3	213.6	23,300 *	23,300 *	23,300 *	23,300 *	23,300 *	23,300 *	280
290	35.4	199.4	22,400 *	22,400 *	22,400 *	22,400 *	22,400 *	22,400 *	290
300	32.2	183.4	21,500 *	21,500 *	21,500 *	21,500 *	21,500 *	21,500 *	300
310	28.7	165.1	20,800 *	20,800 *	20,800 *	20,800 *	20,800 *	20,800 *	310
320	24.8	143.6	19,700	20,000 *	20,000 *	20,000 *	20,000 *	20,000 *	320

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

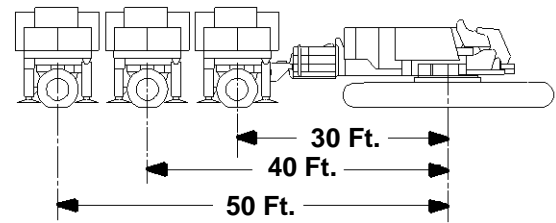

260 Ft. Boom
100 Ft. Jib, 5 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
75	80.6	365.3	44,700 *	44,700 *	44,700 *	44,700 *	44,700 *	44,700 *	75
80	79.8	364.3	44,100 *	44,100 *	44,100 *	44,100 *	44,100 *	44,100 *	80
85	79.0	363.2	43,500 *	43,500 *	43,500 *	43,500 *	43,500 *	43,500 *	85
90	78.1	362.0	42,900 *	42,900 *	42,900 *	42,900 *	42,900 *	42,900 *	90
95	77.3	360.8	42,300 *	42,300 *	42,300 *	42,300 *	42,300 *	42,300 *	95
100	76.5	359.5	41,700 *	41,700 *	41,700 *	41,700 *	41,700 *	41,700 *	100
105	75.7	358.1	41,200 *	41,200 *	41,200 *	41,200 *	41,200 *	41,200 *	105
110	74.9	356.6	40,600 *	40,600 *	40,600 *	40,600 *	40,600 *	40,600 *	110
115	74.0	355.1	40,100 *	40,100 *	40,100 *	40,100 *	40,100 *	40,100 *	115
120	73.2	353.4	39,500 *	39,500 *	39,500 *	39,500 *	39,500 *	39,500 *	120
125	72.4	351.7	39,000 *	39,000 *	39,000 *	39,000 *	39,000 *	39,000 *	125
130	71.5	349.9	38,500 *	38,500 *	38,500 *	38,500 *	38,500 *	38,500 *	130
135	70.7	348.0	37,900 *	37,900 *	37,900 *	37,900 *	37,900 *	37,900 *	135
140	69.8	346.1	37,400 *	37,400 *	37,400 *	37,400 *	37,400 *	37,400 *	140
145	69.0	344.0	36,900 *	36,900 *	36,900 *	36,900 *	36,900 *	36,900 *	145
150	68.1	341.9	36,400 *	36,400 *	36,400 *	36,400 *	36,400 *	36,400 *	150
160	66.4	337.3	35,300 *	35,300 *	35,300 *	35,300 *	35,300 *	35,300 *	160
170	64.6	332.4	34,200 *	34,200 *	34,200 *	34,200 *	34,200 *	34,200 *	170
180	62.8	327.1	33,200 *	33,200 *	33,200 *	33,200 *	33,200 *	33,200 *	180
190	61.0	321.4	32,300 *	32,300 *	32,300 *	32,300 *	32,300 *	32,300 *	190
200	59.1	315.2	31,300 *	31,300 *	31,300 *	31,300 *	31,300 *	31,300 *	200
210	57.2	308.6	30,400 *	30,400 *	30,400 *	30,400 *	30,400 *	30,400 *	210
220	55.3	301.5	29,600 *	29,600 *	29,600 *	29,600 *	29,600 *	29,600 *	220
230	53.3	293.8	28,800 *	28,800 *	28,800 *	28,800 *	28,800 *	28,800 *	230
240	51.2	285.6	28,000 *	28,000 *	28,000 *	28,000 *	28,000 *	28,000 *	240
250	49.1	276.8	27,200 *	27,200 *	27,200 *	27,200 *	27,200 *	27,200 *	250
260	46.9	267.2	26,500 *	26,500 *	26,500 *	26,500 *	26,500 *	26,500 *	260
270	44.7	256.9	25,800 *	25,800 *	25,800 *	25,800 *	25,800 *	25,800 *	270
280	42.3	245.7	24,800 *	24,800 *	24,800 *	24,800 *	24,800 *	24,800 *	280
290	39.8	233.5	22,200 *	22,200 *	22,200 *	22,200 *	22,200 *	22,200 *	290
300	37.2	220.1	18,900 *	18,900 *	18,900 *	18,900 *	18,900 *	18,900 *	300
310	34.3	205.3	15,800 *	15,800 *	15,800 *	15,800 *	15,800 *	15,800 *	310
320	31.3	188.7	12,600 *	12,600 *	12,600 *	12,600 *	12,600 *	12,600 *	320
330	27.9	169.8	9,400 *	9,400 *	9,400 *	9,400 *	9,400 *	9,400 *	330
340	24.0	147.6	6,300 *	6,300 *	6,300 *	6,300 *	6,300 *	6,300 *	340




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

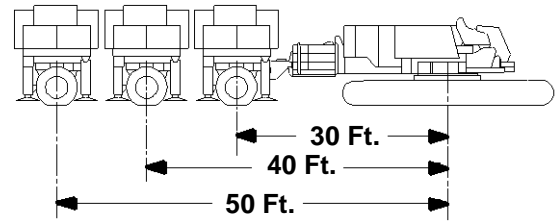

280 Ft. Boom
100 Ft. Jib, 5 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
80	80.8	384.5	43,100 *	43,100 *	43,100 *	43,100 *	43,100 *	43,100 *	80
85	80.0	383.4	42,600 *	42,600 *	42,600 *	42,600 *	42,600 *	42,600 *	85
90	79.3	382.3	42,100 *	42,100 *	42,100 *	42,100 *	42,100 *	42,100 *	90
95	78.5	381.1	41,500 *	41,500 *	41,500 *	41,500 *	41,500 *	41,500 *	95
100	77.7	379.9	41,000 *	41,000 *	41,000 *	41,000 *	41,000 *	41,000 *	100
105	76.9	378.6	40,500 *	40,500 *	40,500 *	40,500 *	40,500 *	40,500 *	105
110	76.2	377.2	40,000 *	40,000 *	40,000 *	40,000 *	40,000 *	40,000 *	110
115	75.4	375.7	39,500 *	39,500 *	39,500 *	39,500 *	39,500 *	39,500 *	115
120	74.6	374.2	39,000 *	39,000 *	39,000 *	39,000 *	39,000 *	39,000 *	120
125	73.8	372.6	38,500 *	38,500 *	38,500 *	38,500 *	38,500 *	38,500 *	125
130	73.0	370.9	38,000 *	38,000 *	38,000 *	38,000 *	38,000 *	38,000 *	130
135	72.2	369.1	37,600 *	37,600 *	37,600 *	37,600 *	37,600 *	37,600 *	135
140	71.4	367.3	37,100 *	37,100 *	37,100 *	37,100 *	37,100 *	37,100 *	140
145	70.6	365.3	36,600 *	36,600 *	36,600 *	36,600 *	36,600 *	36,600 *	145
150	69.8	363.3	36,200 *	36,200 *	36,200 *	36,200 *	36,200 *	36,200 *	150
160	68.2	359.0	35,200 *	35,200 *	35,200 *	35,200 *	35,200 *	35,200 *	160
170	66.5	354.4	34,200 *	34,200 *	34,200 *	34,200 *	34,200 *	34,200 *	170
180	64.8	349.5	33,300 *	33,300 *	33,300 *	33,300 *	33,300 *	33,300 *	180
190	63.1	344.1	32,400 *	32,400 *	32,400 *	32,400 *	32,400 *	32,400 *	190
200	61.4	338.4	31,500 *	31,500 *	31,500 *	31,500 *	31,500 *	31,500 *	200
210	59.6	332.2	30,700 *	30,700 *	30,700 *	30,700 *	30,700 *	30,700 *	210
220	57.9	325.7	29,900 *	29,900 *	29,900 *	29,900 *	29,900 *	29,900 *	220
230	56.0	318.6	29,100 *	29,100 *	29,100 *	29,100 *	29,100 *	29,100 *	230
240	54.1	311.1	28,400 *	28,400 *	28,400 *	28,400 *	28,400 *	28,400 *	240
250	52.2	303.0	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	250
260	50.2	294.3	27,000 *	27,000 *	27,000 *	27,000 *	27,000 *	27,000 *	260
270	48.2	285.0	26,300 *	26,300 *	26,300 *	26,300 *	26,300 *	26,300 *	270
280	46.0	275.0	25,700 *	25,700 *	25,700 *	25,700 *	25,700 *	25,700 *	280
290	43.8	264.2	24,900	25,100 *	25,100 *	25,100 *	25,100 *	25,100 *	290
300	41.5	252.6	22,800	24,600 *	24,600 *	24,600 *	24,600 *	24,600 *	300
310	39.1	239.9	20,700	24,100 *	24,100 *	24,100 *	24,100 *	24,100 *	310
320	36.5	225.9	18,900	23,600 *	23,600 *	23,600 *	23,600 *	23,600 *	320
330	33.8	210.6	17,100	23,200 *	23,100	23,200 *	23,200 *	23,200 *	330
340	30.8	193.4	15,400	22,800 *	21,200	22,800 *	22,800 *	22,800 *	340
350	27.5	173.8	13,800	22,300 *	19,400	22,300 *	22,300 *	22,300 *	350
360	23.7	150.8	12,200	20,800 *	17,700	21,700 *	21,700 *	21,700 *	360

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

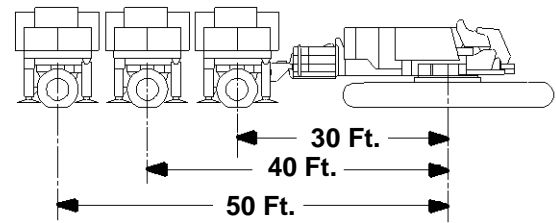

300 Ft. Boom
100 Ft. Jib, 5 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
85	80.5	403.8	42,500 *	42,500 *	42,500 *	42,500 *	42,500 *	42,500 *	85
90	79.8	402.8	42,000 *	42,000 *	42,000 *	42,000 *	42,000 *	42,000 *	90
95	79.1	401.7	41,500 *	41,500 *	41,500 *	41,500 *	41,500 *	41,500 *	95
100	78.3	400.5	41,000 *	41,000 *	41,000 *	41,000 *	41,000 *	41,000 *	100
105	77.6	399.2	40,500 *	40,500 *	40,500 *	40,500 *	40,500 *	40,500 *	105
110	76.9	397.9	40,100 *	40,100 *	40,100 *	40,100 *	40,100 *	40,100 *	110
115	76.1	396.5	39,600 *	39,600 *	39,600 *	39,600 *	39,600 *	39,600 *	115
120	75.4	395.1	39,100 *	39,100 *	39,100 *	39,100 *	39,100 *	39,100 *	120
125	74.6	393.6	38,700 *	38,700 *	38,700 *	38,700 *	38,700 *	38,700 *	125
130	73.9	392.0	38,200 *	38,200 *	38,200 *	38,200 *	38,200 *	38,200 *	130
135	73.1	390.3	37,800 *	37,800 *	37,800 *	37,800 *	37,800 *	37,800 *	135
140	72.4	388.5	37,400 *	37,400 *	37,400 *	37,400 *	37,400 *	37,400 *	140
145	71.6	386.7	36,900 *	36,900 *	36,900 *	36,900 *	36,900 *	36,900 *	145
150	70.9	384.8	36,500 *	36,500 *	36,500 *	36,500 *	36,500 *	36,500 *	150
160	69.3	380.8	35,700 *	35,700 *	35,700 *	35,700 *	35,700 *	35,700 *	160
170	67.8	376.5	34,700 *	34,700 *	34,700 *	34,700 *	34,700 *	34,700 *	170
180	66.2	371.8	33,800 *	33,800 *	33,800 *	33,800 *	33,800 *	33,800 *	180
190	64.6	366.8	33,000 *	33,000 *	33,000 *	33,000 *	33,000 *	33,000 *	190
200	63.0	361.4	32,200 *	32,200 *	32,200 *	32,200 *	32,200 *	32,200 *	200
210	61.3	355.7	31,400 *	31,400 *	31,400 *	31,400 *	31,400 *	31,400 *	210
220	59.7	349.6	30,600 *	30,600 *	30,600 *	30,600 *	30,600 *	30,600 *	220
230	58.0	343.0	29,800 *	29,800 *	29,800 *	29,800 *	29,800 *	29,800 *	230
240	56.2	336.0	29,100 *	29,100 *	29,100 *	29,100 *	29,100 *	29,100 *	240
250	54.4	328.6	28,400 *	28,400 *	28,400 *	28,400 *	28,400 *	28,400 *	250
260	52.6	320.7	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	260
270	50.8	312.2	27,100 *	27,100 *	27,100 *	27,100 *	27,100 *	27,100 *	270
280	48.8	303.1	26,400 *	26,500 *	26,500 *	26,500 *	26,500 *	26,500 *	280
290	46.8	293.4	24,100 *	25,900 *	25,900 *	25,900 *	25,900 *	25,900 *	290
300	44.8	283.0	21,900 *	25,300 *	25,300 *	25,300 *	25,300 *	25,300 *	300
310	42.6	271.7	19,900 *	24,800 *	24,800 *	24,800 *	24,800 *	24,800 *	310
320	40.4	259.6	18,000 *	24,300 *	24,200 *	24,300 *	24,300 *	24,300 *	320
330	38.0	246.4	16,300 *	23,900 *	22,300 *	23,900 *	23,900 *	23,900 *	330
340	35.5	232.0	14,600 *	23,400 *	20,400 *	23,400 *	23,400 *	23,400 *	340
350	32.9	216.1	13,000 *	23,000 *	18,600 *	23,000 *	23,000 *	23,000 *	350
360	29.9	198.4	11,300 *	21,600 *	17,000 *	22,700 *	22,500 *	22,700 *	360
370	26.7	178.2	9,500 *	18,800 *	15,400 *	22,200 *	20,800 *	22,200 *	370
380	23.1	154.5	7,800 *	16,100 *	13,800 *	20,100 *	19,100 *	20,100 *	380




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

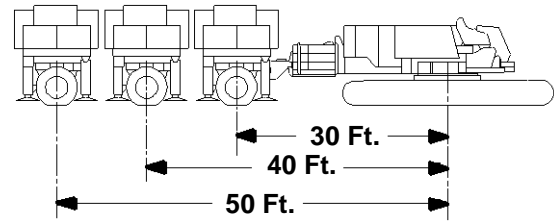

320 Ft. Boom
100 Ft. Jib, 5 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
85	81.0	424.2	42,600 *	42,600 *	42,600 *	42,600 *	42,600 *	42,600 *	85
90	80.3	423.2	42,100 *	42,100 *	42,100 *	42,100 *	42,100 *	42,100 *	90
95	79.6	422.2	41,700 *	41,700 *	41,700 *	41,700 *	41,700 *	41,700 *	95
100	78.9	421.0	41,200 *	41,200 *	41,200 *	41,200 *	41,200 *	41,200 *	100
105	78.2	419.9	40,700 *	40,700 *	40,700 *	40,700 *	40,700 *	40,700 *	105
110	77.5	418.6	40,300 *	40,300 *	40,300 *	40,300 *	40,300 *	40,300 *	110
115	76.8	417.3	39,900 *	39,900 *	39,900 *	39,900 *	39,900 *	39,900 *	115
120	76.1	415.9	39,400 *	39,400 *	39,400 *	39,400 *	39,400 *	39,400 *	120
125	75.4	414.5	39,000 *	39,000 *	39,000 *	39,000 *	39,000 *	39,000 *	125
130	74.7	412.9	38,600 *	38,600 *	38,600 *	38,600 *	38,600 *	38,600 *	130
135	74.0	411.4	38,100 *	38,100 *	38,100 *	38,100 *	38,100 *	38,100 *	135
140	73.3	409.7	37,700 *	37,700 *	37,700 *	37,700 *	37,700 *	37,700 *	140
145	72.5	408.0	37,300 *	37,300 *	37,300 *	37,300 *	37,300 *	37,300 *	145
150	71.8	406.2	36,900 *	36,900 *	36,900 *	36,900 *	36,900 *	36,900 *	150
160	70.4	402.4	36,100 *	36,100 *	36,100 *	36,100 *	36,100 *	36,100 *	160
170	68.9	398.3	35,300 *	35,300 *	35,300 *	35,300 *	35,300 *	35,300 *	170
180	67.4	393.9	34,500 *	34,500 *	34,500 *	34,500 *	34,500 *	34,500 *	180
190	65.9	389.2	33,600 *	33,600 *	33,600 *	33,600 *	33,600 *	33,600 *	190
200	64.4	384.1	32,800 *	32,800 *	32,800 *	32,800 *	32,800 *	32,800 *	200
210	62.8	378.7	32,100 *	32,100 *	32,100 *	32,100 *	32,100 *	32,100 *	210
220	61.3	373.0	31,300 *	31,300 *	31,300 *	31,300 *	31,300 *	31,300 *	220
230	59.7	366.9	30,600 *	30,600 *	30,600 *	30,600 *	30,600 *	30,600 *	230
240	58.1	360.4	29,800 *	29,800 *	29,800 *	29,800 *	29,800 *	29,800 *	240
250	56.4	353.5	29,200 *	29,200 *	29,200 *	29,200 *	29,200 *	29,200 *	250
260	54.7	346.1	28,300	28,500 *	28,500 *	28,500 *	28,500 *	28,500 *	260
270	53.0	338.3	25,600	27,900 *	27,900 *	27,900 *	27,900 *	27,900 *	270
280	51.2	330.0	23,200	27,200 *	27,200 *	27,200 *	27,200 *	27,200 *	280
290	49.4	321.1	20,900	26,700 *	26,700 *	26,700 *	26,700 *	26,700 *	290
300	47.5	311.6	18,700	26,100 *	25,400	26,100 *	26,100 *	26,100 *	300
310	45.6	301.5	16,700	25,500 *	23,100	25,500 *	25,500 *	25,500 *	310
320	43.6	290.7	14,800	25,000 *	21,000	25,000 *	25,000 *	25,000 *	320
330	41.5	279.0	12,700 *	24,600 *	19,000	24,600 *	24,600 *	24,600 *	330
340	39.3	266.5	10,600 *	24,100 *	17,200	24,100 *	23,100	24,100 *	340
350	37.0	252.8	8,700 *	21,700 *	15,400	23,700 *	21,100	23,700 *	350
360	34.6	238.0	6,800 *	18,800 *	13,800	23,300 *	19,300	23,300 *	360
370	32.0	221.6	5,100 *	16,100 *	12,000 *	22,900 *	17,600	22,900 *	370
380	29.2	203.3		13,500 *	10,100 *	22,600 *	15,900	22,600 *	380
390	26.0	182.5		10,900 *	8,300 *	22,000 *	14,300	22,000 *	390
400	22.5	158.2		8,400 *	6,600 *	19,500 *	12,800	21,500 *	400

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

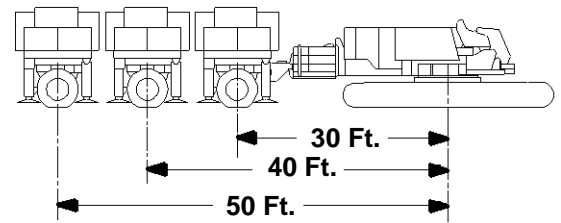

340 Ft. Boom
100 Ft. Jib, 5 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
90	80.7	443.6	41,900 *	41,900 *	41,900 *	41,900 *	90
95	80.1	442.6	41,500 *	41,500 *	41,500 *	41,500 *	95
100	79.4	441.5	41,000 *	41,000 *	41,000 *	41,000 *	100
105	78.8	440.4	40,600 *	40,600 *	40,600 *	40,600 *	105
110	78.1	439.2	40,200 *	40,200 *	40,200 *	40,200 *	110
115	77.4	438.0	39,800 *	39,800 *	39,800 *	39,800 *	115
120	76.7	436.6	39,400 *	39,400 *	39,400 *	39,400 *	120
125	76.1	435.3	39,000 *	39,000 *	39,000 *	39,000 *	125
130	75.4	433.8	38,600 *	38,600 *	38,600 *	38,600 *	130
135	74.7	432.3	38,200 *	38,200 *	38,200 *	38,200 *	135
140	74.0	430.7	37,800 *	37,800 *	37,800 *	37,800 *	140
145	73.4	429.1	37,400 *	37,400 *	37,400 *	37,400 *	145
150	72.7	427.4	37,100 *	37,100 *	37,100 *	37,100 *	150
160	71.3	423.8	36,300 *	36,300 *	36,300 *	36,300 *	160
170	69.9	419.9	35,600 *	35,600 *	35,600 *	35,600 *	170
180	68.5	415.7	34,900 *	34,900 *	34,900 *	34,900 *	180
190	67.1	411.3	34,100 *	34,100 *	34,100 *	34,100 *	190
200	65.6	406.5	33,300 *	33,300 *	33,300 *	33,300 *	200
210	64.2	401.5	32,600 *	32,600 *	32,600 *	32,600 *	210
220	62.7	396.1	31,800 *	31,800 *	31,800 *	31,800 *	220
230	61.2	390.3	31,100 *	31,100 *	31,100 *	31,100 *	230
240	59.7	384.2	30,400 *	30,400 *	30,400 *	30,400 *	240
250	58.2	377.7	29,700 *	29,700 *	29,700 *	29,700 *	250
260	56.6	370.9	29,100 *	29,100 *	29,100 *	29,100 *	260
270	55.0	363.6	28,500 *	28,500 *	28,500 *	28,500 *	270
280	53.3	355.9	27,900 *	27,900 *	27,900 *	27,900 *	280
290	51.7	347.7	26,900 *	27,300 *	27,300 *	27,300 *	290
300	49.9	339.0	24,500 *	26,700 *	26,700 *	26,700 *	300
310	48.2	329.7	22,300 *	26,200 *	26,200 *	26,200 *	310
320	46.4	319.9	20,200 *	25,700 *	25,700 *	25,700 *	320
330	44.5	309.4	18,200 *	25,100 *	24,300 *	25,100 *	330
340	42.5	298.2	16,400 *	24,700 *	22,300 *	24,700 *	340
350	40.5	286.1	14,600 *	24,200 *	20,300 *	24,200 *	350
360	38.4	273.1	12,700 *	23,800 *	18,500 *	23,800 *	360
370	36.1	259.1	10,800 *	23,400 *	16,800 *	23,400 *	370
380	33.7	243.7	9,000 *	23,100 *	15,100 *	23,100 *	380
390	31.2	226.9	7,300 *	22,800 *	13,600 *	22,800 *	390
400	28.4	208.0	5,600 *	20,400 *	11,900 *	22,500 *	400
410	25.4	186.7		17,600 *	10,200 *	21,900 *	410




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
Boom No. 79-44 with 130 Ft. Mast No. 44
169,200 Lb. Crane Counterweight
60,000 Lb. Carbody Counterweight
240,000 Lb. and 462,000 Lb. Wheeled Counterweight
360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

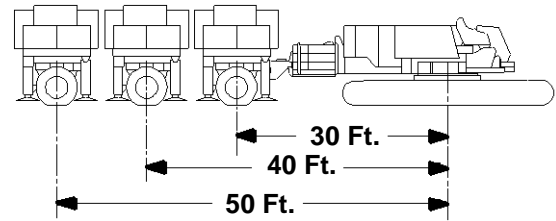

360 Ft. Boom 100 Ft. Jib, 5 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	50 Ft. Position	
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds
95	80.5	463.0	41,100 *	41,100 *
100	79.9	462.0	40,700 *	40,700 *
105	79.3	460.9	40,300 *	40,300 *
110	78.6	459.8	39,900 *	39,900 *
115	78.0	458.6	39,500 *	39,500 *
120	77.3	457.3	39,200 *	39,200 *
125	76.7	456.0	38,800 *	38,800 *
130	76.1	454.6	38,400 *	38,400 *
135	75.4	453.2	38,100 *	38,100 *
140	74.8	451.7	37,700 *	37,700 *
145	74.1	450.1	37,400 *	37,400 *
150	73.5	448.5	37,000 *	37,000 *
160	72.1	445.1	36,300 *	36,300 *
170	70.8	441.4	35,600 *	35,600 *
180	69.5	437.4	35,000 *	35,000 *
190	68.1	433.2	34,300 *	34,300 *
200	66.8	428.7	33,600 *	33,600 *
210	65.4	423.9	32,900 *	32,900 *
220	64.0	418.8	32,200 *	32,200 *
230	62.6	413.4	31,500 *	31,500 *
240	61.2	407.6	30,800 *	30,800 *
250	59.7	401.5	30,200 *	30,200 *
260	58.2	395.1	29,500 *	29,500 *
270	56.7	388.3	28,900 *	28,900 *
280	55.2	381.1	28,400 *	28,400 *
290	53.6	373.5	27,800 *	27,800 *
300	52.0	365.4	27,200 *	27,200 *
310	50.4	356.9	26,700 *	26,700 *
320	48.7	347.8	26,200 *	26,200 *
330	47.0	338.2	25,700 *	25,700 *
340	45.2	328.0	25,200 *	25,200 *
350	43.4	317.1	24,800 *	24,800 *
360	41.5	305.5	24,400 *	24,400 *
370	39.5	293.0	23,900 *	23,900 *
380	37.5	279.6	23,600 *	23,600 *
390	35.3	265.1	23,200 *	23,200 *
400	32.9	249.4	21,500 *	22,900 *
410	30.5	232.0	18,800 *	22,600 *
420	27.8	212.7	16,200 *	22,400 *
430	24.8	190.8	13,700 *	19,200 *

380 Ft. Boom 100 Ft. Jib, 5 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	50 Ft. Position
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds
95	80.9	483.4	40,700 *
100	80.3	482.4	40,300 *
105	79.7	481.4	40,000 *
110	79.1	480.3	39,600 *
115	78.5	479.1	39,300 *
120	77.9	477.9	38,900 *
125	77.3	476.7	38,600 *
130	76.6	475.4	38,300 *
135	76.0	474.0	37,900 *
140	75.4	472.6	37,600 *
145	74.8	471.1	37,300 *
150	74.2	469.5	36,900 *
160	72.9	466.2	36,300 *
170	71.7	462.7	35,700 *
180	70.4	459.0	35,000 *
190	69.1	454.9	34,400 *
200	67.8	450.6	33,800 *
210	66.5	446.1	33,100 *
220	65.2	441.2	32,500 *
230	63.8	436.1	31,800 *
240	62.5	430.7	31,200 *
250	61.1	424.9	30,600 *
260	59.7	418.9	29,900 *
270	58.3	412.5	29,400 *
280	56.9	405.7	28,800 *
290	55.4	398.6	28,200 *
300	53.9	391.0	27,700 *
310	52.4	383.1	27,200 *
320	50.8	374.7	26,700 *
330	49.3	365.8	26,200 *
340	47.6	356.4	25,700 *
350	45.9	346.4	25,300 *
360	44.2	335.8	24,800 *
370	42.4	324.6	24,400 *
380	40.6	312.6	24,000 *
390	38.6	299.8	23,700 *
400	36.6	286.0	23,300 *
410	34.5	271.1	23,000 *
420	32.2	254.9	21,800 *
430	29.8	237.1	18,500 *
440	27.1	217.3	15,300 *
450	24.2	194.8	12,200 *

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

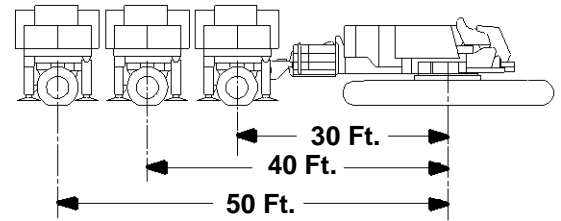

200 Ft. Boom

100 Ft. Jib, 15 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
85	80.5	298.7	37,300 *	37,300 *	37,300 *	37,300 *	37,300 *	37,300 *	85
90	79.5	297.3	36,700 *	36,700 *	36,700 *	36,700 *	36,700 *	36,700 *	90
95	78.5	295.7	36,000 *	36,000 *	36,000 *	36,000 *	36,000 *	36,000 *	95
100	77.5	294.1	35,400 *	35,400 *	35,400 *	35,400 *	35,400 *	35,400 *	100
105	76.4	292.4	34,800 *	34,800 *	34,800 *	34,800 *	34,800 *	34,800 *	105
110	75.4	290.6	34,200 *	34,200 *	34,200 *	34,200 *	34,200 *	34,200 *	110
115	74.4	288.7	33,600 *	33,600 *	33,600 *	33,600 *	33,600 *	33,600 *	115
120	73.4	286.6	33,100 *	33,100 *	33,100 *	33,100 *	33,100 *	33,100 *	120
125	72.3	284.5	32,500 *	32,500 *	32,500 *	32,500 *	32,500 *	32,500 *	125
130	71.3	282.3	32,000 *	32,000 *	32,000 *	32,000 *	32,000 *	32,000 *	130
135	70.2	279.9	31,400 *	31,400 *	31,400 *	31,400 *	31,400 *	31,400 *	135
140	69.2	277.5	30,500 *	30,500 *	30,500 *	30,500 *	30,500 *	30,500 *	140
145	68.1	274.9	29,700 *	29,700 *	29,700 *	29,700 *	29,700 *	29,700 *	145
150	67.0	272.2	28,900 *	28,900 *	28,900 *	28,900 *	28,900 *	28,900 *	150
160	64.8	266.4	27,300 *	27,300 *	27,300 *	27,300 *	27,300 *	27,300 *	160
170	62.5	260.1	26,000 *	26,000 *	26,000 *	26,000 *	26,000 *	26,000 *	170
180	60.2	253.2	24,700 *	24,700 *	24,700 *	24,700 *	24,700 *	24,700 *	180
190	57.8	245.7	23,600 *	23,600 *	23,600 *	23,600 *	23,600 *	23,600 *	190
200	55.3	237.5	22,500 *	22,500 *	22,500 *	22,500 *	22,500 *	22,500 *	200
210	52.7	228.5	21,600 *	21,600 *	21,600 *	21,600 *	21,600 *	21,600 *	210
220	50.1	218.7	20,700 *	20,700 *	20,700 *	20,700 *	20,700 *	20,700 *	220
230	47.2	207.8	19,900 *	19,900 *	19,900 *	19,900 *	19,900 *	19,900 *	230
240	44.3	195.8	19,200 *	19,200 *	19,200 *	19,200 *	19,200 *	19,200 *	240
250	41.1	182.4	18,500 *	18,500 *	18,500 *	18,500 *	18,500 *	18,500 *	250
260	37.6	167.3	17,900 *	17,900 *	17,900 *	17,900 *	17,900 *	17,900 *	260
270	33.7	149.7	17,400 *	17,400 *	17,400 *	17,400 *	17,400 *	17,400 *	270




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

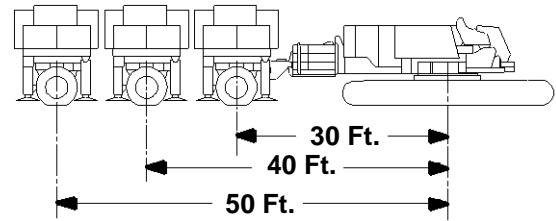

220 Ft. Boom
100 Ft. Jib, 15 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
90	80.1	318.0	37,000 *	37,000 *	37,000 *	37,000 *	37,000 *	37,000 *	90
95	79.2	316.5	36,400 *	36,400 *	36,400 *	36,400 *	36,400 *	36,400 *	95
100	78.3	315.0	35,800 *	35,800 *	35,800 *	35,800 *	35,800 *	35,800 *	100
105	77.3	313.4	35,200 *	35,200 *	35,200 *	35,200 *	35,200 *	35,200 *	105
110	76.4	311.7	34,700 *	34,700 *	34,700 *	34,700 *	34,700 *	34,700 *	110
115	75.4	310.0	34,100 *	34,100 *	34,100 *	34,100 *	34,100 *	34,100 *	115
120	74.5	308.1	33,600 *	33,600 *	33,600 *	33,600 *	33,600 *	33,600 *	120
125	73.5	306.1	33,100 *	33,100 *	33,100 *	33,100 *	33,100 *	33,100 *	125
130	72.5	304.0	32,500 *	32,500 *	32,500 *	32,500 *	32,500 *	32,500 *	130
135	71.6	301.8	32,000 *	32,000 *	32,000 *	32,000 *	32,000 *	32,000 *	135
140	70.6	299.6	31,500 *	31,500 *	31,500 *	31,500 *	31,500 *	31,500 *	140
145	69.6	297.2	30,900 *	30,900 *	30,900 *	30,900 *	30,900 *	30,900 *	145
150	68.6	294.7	30,100 *	30,100 *	30,100 *	30,100 *	30,100 *	30,100 *	150
160	66.5	289.4	28,500 *	28,500 *	28,500 *	28,500 *	28,500 *	28,500 *	160
170	64.5	283.6	27,100 *	27,100 *	27,100 *	27,100 *	27,100 *	27,100 *	170
180	62.3	277.3	25,900 *	25,900 *	25,900 *	25,900 *	25,900 *	25,900 *	180
190	60.2	270.5	24,700 *	24,700 *	24,700 *	24,700 *	24,700 *	24,700 *	190
200	57.9	263.1	23,600 *	23,600 *	23,600 *	23,600 *	23,600 *	23,600 *	200
210	55.6	255.1	22,700 *	22,700 *	22,700 *	22,700 *	22,700 *	22,700 *	210
220	53.3	246.3	21,800 *	21,800 *	21,800 *	21,800 *	21,800 *	21,800 *	220
230	50.8	236.8	20,900 *	20,900 *	20,900 *	20,900 *	20,900 *	20,900 *	230
240	48.2	226.5	20,200 *	20,200 *	20,200 *	20,200 *	20,200 *	20,200 *	240
250	45.5	215.1	19,500 *	19,500 *	19,500 *	19,500 *	19,500 *	19,500 *	250
260	42.6	202.5	18,800 *	18,800 *	18,800 *	18,800 *	18,800 *	18,800 *	260
270	39.5	188.5	18,200 *	18,200 *	18,200 *	18,200 *	18,200 *	18,200 *	270
280	36.1	172.6	17,700 *	17,700 *	17,700 *	17,700 *	17,700 *	17,700 *	280
290	32.4	154.4	17,200 *	17,200 *	17,200 *	17,200 *	17,200 *	17,200 *	290

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

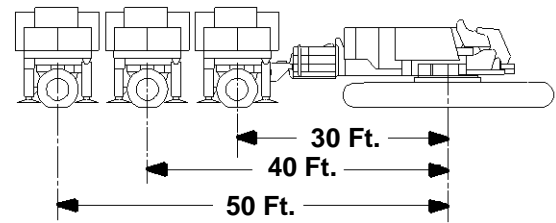

240 Ft. Boom
100 Ft. Jib, 15 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
90	80.7	338.6	37,300 *	37,300 *	37,300 *	37,300 *	37,300 *	37,300 *	90
95	79.9	337.2	36,700 *	36,700 *	36,700 *	36,700 *	36,700 *	36,700 *	95
100	79.0	335.8	36,100 *	36,100 *	36,100 *	36,100 *	36,100 *	36,100 *	100
105	78.1	334.3	35,600 *	35,600 *	35,600 *	35,600 *	35,600 *	35,600 *	105
110	77.2	332.7	35,100 *	35,100 *	35,100 *	35,100 *	35,100 *	35,100 *	110
115	76.3	331.1	34,600 *	34,600 *	34,600 *	34,600 *	34,600 *	34,600 *	115
120	75.4	329.3	34,100 *	34,100 *	34,100 *	34,100 *	34,100 *	34,100 *	120
125	74.5	327.5	33,500 *	33,500 *	33,500 *	33,500 *	33,500 *	33,500 *	125
130	73.6	325.5	33,100 *	33,100 *	33,100 *	33,100 *	33,100 *	33,100 *	130
135	72.7	323.5	32,600 *	32,600 *	32,600 *	32,600 *	32,600 *	32,600 *	135
140	71.8	321.4	32,100 *	32,100 *	32,100 *	32,100 *	32,100 *	32,100 *	140
145	70.9	319.2	31,600 *	31,600 *	31,600 *	31,600 *	31,600 *	31,600 *	145
150	69.9	316.9	31,200 *	31,200 *	31,200 *	31,200 *	31,200 *	31,200 *	150
160	68.1	311.9	29,700 *	29,700 *	29,700 *	29,700 *	29,700 *	29,700 *	160
170	66.1	306.6	28,300 *	28,300 *	28,300 *	28,300 *	28,300 *	28,300 *	170
180	64.2	300.8	27,000 *	27,000 *	27,000 *	27,000 *	27,000 *	27,000 *	180
190	62.2	294.6	25,800 *	25,800 *	25,800 *	25,800 *	25,800 *	25,800 *	190
200	60.2	287.8	24,700 *	24,700 *	24,700 *	24,700 *	24,700 *	24,700 *	200
210	58.1	280.5	23,700 *	23,700 *	23,700 *	23,700 *	23,700 *	23,700 *	210
220	55.9	272.6	22,800 *	22,800 *	22,800 *	22,800 *	22,800 *	22,800 *	220
230	53.7	264.1	21,900 *	21,900 *	21,900 *	21,900 *	21,900 *	21,900 *	230
240	51.4	254.9	21,100 *	21,100 *	21,100 *	21,100 *	21,100 *	21,100 *	240
250	49.0	244.9	20,400 *	20,400 *	20,400 *	20,400 *	20,400 *	20,400 *	250
260	46.5	234.0	19,700 *	19,700 *	19,700 *	19,700 *	19,700 *	19,700 *	260
270	43.9	222.1	19,100 *	19,100 *	19,100 *	19,100 *	19,100 *	19,100 *	270
280	41.1	208.9	18,500 *	18,500 *	18,500 *	18,500 *	18,500 *	18,500 *	280
290	38.1	194.3	18,000 *	18,000 *	18,000 *	18,000 *	18,000 *	18,000 *	290
300	34.9	177.8	17,500 *	17,500 *	17,500 *	17,500 *	17,500 *	17,500 *	300




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

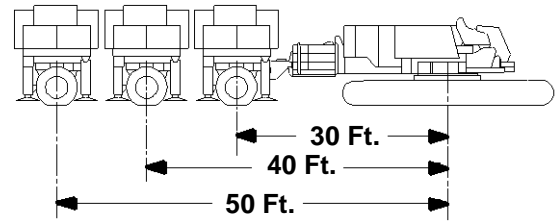

260 Ft. Boom
100 Ft. Jib, 15 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
95	80.4	357.9	36,900 *	36,900 *	36,900 *	36,900 *	36,900 *	36,900 *	95
100	79.6	356.5	36,400 *	36,400 *	36,400 *	36,400 *	36,400 *	36,400 *	100
105	78.8	355.1	35,900 *	35,900 *	35,900 *	35,900 *	35,900 *	35,900 *	105
110	78.0	353.6	35,400 *	35,400 *	35,400 *	35,400 *	35,400 *	35,400 *	110
115	77.1	352.1	34,900 *	34,900 *	34,900 *	34,900 *	34,900 *	34,900 *	115
120	76.3	350.4	34,400 *	34,400 *	34,400 *	34,400 *	34,400 *	34,400 *	120
125	75.4	348.7	34,000 *	34,000 *	34,000 *	34,000 *	34,000 *	34,000 *	125
130	74.6	346.9	33,500 *	33,500 *	33,500 *	33,500 *	33,500 *	33,500 *	130
135	73.7	345.0	33,000 *	33,000 *	33,000 *	33,000 *	33,000 *	33,000 *	135
140	72.9	343.0	32,600 *	32,600 *	32,600 *	32,600 *	32,600 *	32,600 *	140
145	72.0	340.9	32,100 *	32,100 *	32,100 *	32,100 *	32,100 *	32,100 *	145
150	71.1	338.8	31,700 *	31,700 *	31,700 *	31,700 *	31,700 *	31,700 *	150
160	69.4	334.2	30,800 *	30,800 *	30,800 *	30,800 *	30,800 *	30,800 *	160
170	67.6	329.2	29,400 *	29,400 *	29,400 *	29,400 *	29,400 *	29,400 *	170
180	65.8	323.8	28,000 *	28,000 *	28,000 *	28,000 *	28,000 *	28,000 *	180
190	64.0	318.0	26,800 *	26,800 *	26,800 *	26,800 *	26,800 *	26,800 *	190
200	62.1	311.8	25,700 *	25,700 *	25,700 *	25,700 *	25,700 *	25,700 *	200
210	60.2	305.1	24,700 *	24,700 *	24,700 *	24,700 *	24,700 *	24,700 *	210
220	58.2	297.9	23,800 *	23,800 *	23,800 *	23,800 *	23,800 *	23,800 *	220
230	56.2	290.2	22,900 *	22,900 *	22,900 *	22,900 *	22,900 *	22,900 *	230
240	54.1	281.8	22,100 *	22,100 *	22,100 *	22,100 *	22,100 *	22,100 *	240
250	51.9	272.9	21,300 *	21,300 *	21,300 *	21,300 *	21,300 *	21,300 *	250
260	49.7	263.2	20,600 *	20,600 *	20,600 *	20,600 *	20,600 *	20,600 *	260
270	47.4	252.7	20,000 *	20,000 *	20,000 *	20,000 *	20,000 *	20,000 *	270
280	45.0	241.3	19,400 *	19,400 *	19,400 *	19,400 *	19,400 *	19,400 *	280
290	42.4	228.8	18,800 *	18,800 *	18,800 *	18,800 *	18,800 *	18,800 *	290
300	39.7	215.2	16,700 *	16,700 *	16,700 *	16,700 *	16,700 *	16,700 *	300
310	36.8	200.0	13,800 *	13,800 *	13,800 *	13,800 *	13,800 *	13,800 *	310
320	33.7	182.9	11,000 *	11,000 *	11,000 *	11,000 *	11,000 *	11,000 *	320

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

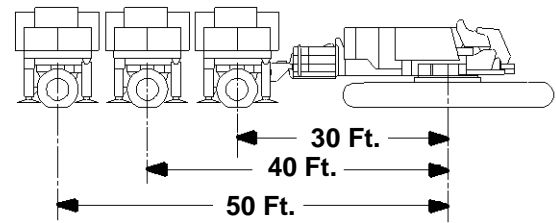

280 Ft. Boom
100 Ft. Jib, 15 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
100	80.4	376.8	36,300 *	36,300 *	36,300 *	36,300 *	36,300 *	36,300 *	100
105	79.6	375.5	35,800 *	35,800 *	35,800 *	35,800 *	35,800 *	35,800 *	105
110	78.8	374.1	35,300 *	35,300 *	35,300 *	35,300 *	35,300 *	35,300 *	110
115	78.0	372.6	34,900 *	34,900 *	34,900 *	34,900 *	34,900 *	34,900 *	115
120	77.3	371.0	34,400 *	34,400 *	34,400 *	34,400 *	34,400 *	34,400 *	120
125	76.5	369.4	34,000 *	34,000 *	34,000 *	34,000 *	34,000 *	34,000 *	125
130	75.7	367.7	33,600 *	33,600 *	33,600 *	33,600 *	33,600 *	33,600 *	130
135	74.9	365.9	33,100 *	33,100 *	33,100 *	33,100 *	33,100 *	33,100 *	135
140	74.0	364.0	32,700 *	32,700 *	32,700 *	32,700 *	32,700 *	32,700 *	140
145	73.2	362.1	32,300 *	32,300 *	32,300 *	32,300 *	32,300 *	32,300 *	145
150	72.4	360.1	31,900 *	31,900 *	31,900 *	31,900 *	31,900 *	31,900 *	150
160	70.8	355.8	31,100 *	31,100 *	31,100 *	31,100 *	31,100 *	31,100 *	160
170	69.1	351.1	30,400 *	30,400 *	30,400 *	30,400 *	30,400 *	30,400 *	170
180	67.4	346.1	29,600 *	29,600 *	29,600 *	29,600 *	29,600 *	29,600 *	180
190	65.7	340.7	28,900 *	28,900 *	28,900 *	28,900 *	28,900 *	28,900 *	190
200	63.9	334.9	28,300 *	28,300 *	28,300 *	28,300 *	28,300 *	28,300 *	200
210	62.2	328.7	27,600 *	27,600 *	27,600 *	27,600 *	27,600 *	27,600 *	210
220	60.3	322.0	27,000 *	27,000 *	27,000 *	27,000 *	27,000 *	27,000 *	220
230	58.5	314.9	26,500 *	26,500 *	26,500 *	26,500 *	26,500 *	26,500 *	230
240	56.6	307.2	25,800 *	25,800 *	25,800 *	25,800 *	25,800 *	25,800 *	240
250	54.6	299.1	24,900 *	24,900 *	24,900 *	24,900 *	24,900 *	24,900 *	250
260	52.6	290.3	24,200 *	24,200 *	24,200 *	24,200 *	24,200 *	24,200 *	260
270	50.5	280.8	23,400 *	23,400 *	23,400 *	23,400 *	23,400 *	23,400 *	270
280	48.4	270.7	22,800 *	22,800 *	22,800 *	22,800 *	22,800 *	22,800 *	280
290	46.1	259.7	22,100 *	22,100 *	22,100 *	22,100 *	22,100 *	22,100 *	290
300	43.8	247.8	21,500 *	21,500 *	21,500 *	21,500 *	21,500 *	21,500 *	300
310	41.3	234.8	21,000 *	21,000 *	21,000 *	21,000 *	21,000 *	21,000 *	310
320	38.7	220.6	19,800 *	20,500 *	20,500 *	20,500 *	20,500 *	20,500 *	320
330	35.8	204.8	17,900 *	20,000 *	20,000 *	20,000 *	20,000 *	20,000 *	330




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

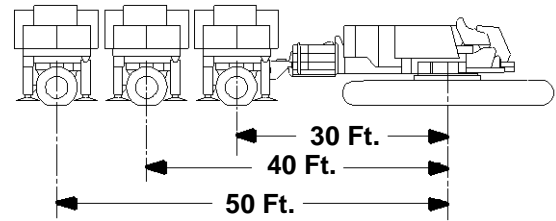

300 Ft. Boom

100 Ft. Jib, 15 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
100	80.9	397.3	36,400 *	36,400 *	36,400 *	36,400 *	36,400 *	36,400 *	100
105	80.2	396.1	35,900 *	35,900 *	35,900 *	35,900 *	35,900 *	35,900 *	105
110	79.4	394.8	35,500 *	35,500 *	35,500 *	35,500 *	35,500 *	35,500 *	110
115	78.7	393.4	35,100 *	35,100 *	35,100 *	35,100 *	35,100 *	35,100 *	115
120	77.9	391.9	34,600 *	34,600 *	34,600 *	34,600 *	34,600 *	34,600 *	120
125	77.2	390.3	34,200 *	34,200 *	34,200 *	34,200 *	34,200 *	34,200 *	125
130	76.4	388.7	33,800 *	33,800 *	33,800 *	33,800 *	33,800 *	33,800 *	130
135	75.7	387.0	33,400 *	33,400 *	33,400 *	33,400 *	33,400 *	33,400 *	135
140	74.9	385.3	33,000 *	33,000 *	33,000 *	33,000 *	33,000 *	33,000 *	140
145	74.1	383.5	32,700 *	32,700 *	32,700 *	32,700 *	32,700 *	32,700 *	145
150	73.4	381.5	32,300 *	32,300 *	32,300 *	32,300 *	32,300 *	32,300 *	150
160	71.8	377.5	31,500 *	31,500 *	31,500 *	31,500 *	31,500 *	31,500 *	160
170	70.2	373.1	30,800 *	30,800 *	30,800 *	30,800 *	30,800 *	30,800 *	170
180	68.6	368.4	30,100 *	30,100 *	30,100 *	30,100 *	30,100 *	30,100 *	180
190	67.0	363.3	29,400 *	29,400 *	29,400 *	29,400 *	29,400 *	29,400 *	190
200	65.4	357.9	28,800 *	28,800 *	28,800 *	28,800 *	28,800 *	28,800 *	200
210	63.7	352.1	28,200 *	28,200 *	28,200 *	28,200 *	28,200 *	28,200 *	210
220	62.0	345.9	27,600 *	27,600 *	27,600 *	27,600 *	27,600 *	27,600 *	220
230	60.3	339.3	27,000 *	27,000 *	27,000 *	27,000 *	27,000 *	27,000 *	230
240	58.6	332.3	26,500 *	26,500 *	26,500 *	26,500 *	26,500 *	26,500 *	240
250	56.8	324.7	25,900 *	25,900 *	25,900 *	25,900 *	25,900 *	25,900 *	250
260	54.9	316.7	25,100 *	25,100 *	25,100 *	25,100 *	25,100 *	25,100 *	260
270	53.0	308.1	24,300 *	24,300 *	24,300 *	24,300 *	24,300 *	24,300 *	270
280	51.1	298.9	23,600 *	23,600 *	23,600 *	23,600 *	23,600 *	23,600 *	280
290	49.1	289.0	23,000 *	23,000 *	23,000 *	23,000 *	23,000 *	23,000 *	290
300	47.0	278.4	22,400 *	22,400 *	22,400 *	22,400 *	22,400 *	22,400 *	300
310	44.8	267.0	21,100	21,800 *	21,800 *	21,800 *	21,800 *	21,800 *	310
320	42.5	254.6	19,100	21,300 *	21,300 *	21,300 *	21,300 *	21,300 *	320
330	40.1	241.2	17,200	20,800 *	20,800 *	20,800 *	20,800 *	20,800 *	330
340	37.5	226.4	15,400	20,300 *	20,300 *	20,300 *	20,300 *	20,300 *	340
350	34.8	210.1	13,700	19,900 *	19,400	19,900 *	19,900 *	19,900 *	350

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

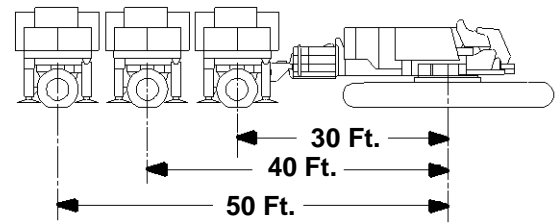

320 Ft. Boom
100 Ft. Jib, 15 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
105	80.6	416.6	36,100 *	36,100 *	36,100 *	36,100 *	36,100 *	36,100 *	105
110	79.9	415.4	35,700 *	35,700 *	35,700 *	35,700 *	35,700 *	35,700 *	110
115	79.2	414.1	35,300 *	35,300 *	35,300 *	35,300 *	35,300 *	35,300 *	115
120	78.5	412.7	34,900 *	34,900 *	34,900 *	34,900 *	34,900 *	34,900 *	120
125	77.8	411.2	34,500 *	34,500 *	34,500 *	34,500 *	34,500 *	34,500 *	125
130	77.1	409.7	34,100 *	34,100 *	34,100 *	34,100 *	34,100 *	34,100 *	130
135	76.4	408.1	33,700 *	33,700 *	33,700 *	33,700 *	33,700 *	33,700 *	135
140	75.6	406.4	33,300 *	33,300 *	33,300 *	33,300 *	33,300 *	33,300 *	140
145	74.9	404.7	33,000 *	33,000 *	33,000 *	33,000 *	33,000 *	33,000 *	145
150	74.2	402.9	32,600 *	32,600 *	32,600 *	32,600 *	32,600 *	32,600 *	150
160	72.7	399.0	31,900 *	31,900 *	31,900 *	31,900 *	31,900 *	31,900 *	160
170	71.2	394.9	31,200 *	31,200 *	31,200 *	31,200 *	31,200 *	31,200 *	170
180	69.7	390.5	30,500 *	30,500 *	30,500 *	30,500 *	30,500 *	30,500 *	180
190	68.2	385.7	29,900 *	29,900 *	29,900 *	29,900 *	29,900 *	29,900 *	190
200	66.7	380.6	29,200 *	29,200 *	29,200 *	29,200 *	29,200 *	29,200 *	200
210	65.1	375.2	28,600 *	28,600 *	28,600 *	28,600 *	28,600 *	28,600 *	210
220	63.6	369.4	28,000 *	28,000 *	28,000 *	28,000 *	28,000 *	28,000 *	220
230	61.9	363.2	27,500 *	27,500 *	27,500 *	27,500 *	27,500 *	27,500 *	230
240	60.3	356.6	27,000 *	27,000 *	27,000 *	27,000 *	27,000 *	27,000 *	240
250	58.6	349.6	26,500 *	26,500 *	26,500 *	26,500 *	26,500 *	26,500 *	250
260	56.9	342.2	25,900 *	25,900 *	25,900 *	25,900 *	25,900 *	25,900 *	260
270	55.2	334.3	25,200 *	25,200 *	25,200 *	25,200 *	25,200 *	25,200 *	270
280	53.4	325.8	24,500 *	24,500 *	24,500 *	24,500 *	24,500 *	24,500 *	280
290	51.6	316.8	22,400 *	23,800 *	23,800 *	23,800 *	23,800 *	23,800 *	290
300	49.7	307.2	20,200 *	23,200 *	23,200 *	23,200 *	23,200 *	23,200 *	300
310	47.7	297.0	18,100 *	22,600 *	22,600 *	22,600 *	22,600 *	22,600 *	310
320	45.7	286.0	16,100 *	22,000 *	22,000 *	22,000 *	22,000 *	22,000 *	320
330	43.5	274.1	14,200 *	21,500 *	20,200 *	21,500 *	21,500 *	21,500 *	330
340	41.3	261.3	12,000 *	21,000 *	18,200 *	21,000 *	21,000 *	21,000 *	340
350	39.0	247.4	9,900 *	20,600 *	16,400 *	20,600 *	20,600 *	20,600 *	350
360	36.5	232.1	8,000 *	20,100 *	14,600 *	20,100 *	20,100 *	20,100 *	360
370	33.8	215.3	6,100 *	17,500 *	12,900 *	19,800 *	18,300 *	19,800 *	370




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

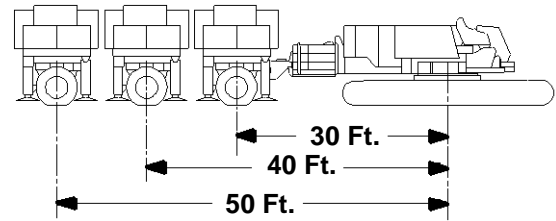

340 Ft. Boom
100 Ft. Jib, 15 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
110	80.4	436.0	35,700 *	35,700 *	35,700 *	35,700 *	110
115	79.7	434.7	35,400 *	35,400 *	35,400 *	35,400 *	115
120	79.1	433.4	35,000 *	35,000 *	35,000 *	35,000 *	120
125	78.4	432.0	34,600 *	34,600 *	34,600 *	34,600 *	125
130	77.7	430.5	34,200 *	34,200 *	34,200 *	34,200 *	130
135	77.0	429.0	33,900 *	33,900 *	33,900 *	33,900 *	135
140	76.3	427.4	33,500 *	33,500 *	33,500 *	33,500 *	140
145	75.6	425.8	33,200 *	33,200 *	33,200 *	33,200 *	145
150	74.9	424.1	32,800 *	32,800 *	32,800 *	32,800 *	150
160	73.6	420.4	32,200 *	32,200 *	32,200 *	32,200 *	160
170	72.2	416.5	31,500 *	31,500 *	31,500 *	31,500 *	170
180	70.7	412.3	30,800 *	30,800 *	30,800 *	30,800 *	180
190	69.3	407.8	30,200 *	30,200 *	30,200 *	30,200 *	190
200	67.9	403.0	29,600 *	29,600 *	29,600 *	29,600 *	200
210	66.4	397.9	29,100 *	29,100 *	29,100 *	29,100 *	210
220	64.9	392.4	28,500 *	28,500 *	28,500 *	28,500 *	220
230	63.4	386.6	27,900 *	27,900 *	27,900 *	27,900 *	230
240	61.9	380.5	27,400 *	27,400 *	27,400 *	27,400 *	240
250	60.3	373.9	26,900 *	26,900 *	26,900 *	26,900 *	250
260	58.7	367.0	26,400 *	26,400 *	26,400 *	26,400 *	260
270	57.1	359.6	26,000 *	26,000 *	26,000 *	26,000 *	270
280	55.4	351.8	25,300 *	25,300 *	25,300 *	25,300 *	280
290	53.7	343.5	24,600 *	24,600 *	24,600 *	24,600 *	290
300	52.0	334.7	23,900 *	23,900 *	23,900 *	23,900 *	300
310	50.2	325.4	23,300 *	23,300 *	23,300 *	23,300 *	310
320	48.3	315.4	21,600	22,800 *	22,800 *	22,800 *	320
330	46.4	304.7	19,500	22,200 *	22,200 *	22,200 *	330
340	44.5	293.3	17,500	21,700 *	21,700 *	21,700 *	340
350	42.4	281.0	15,700	21,200 *	21,200 *	21,200 *	350
360	40.2	267.8	13,900	20,800 *	19,500	20,800 *	360
370	37.9	253.4	12,000 *	20,400 *	17,700	20,400 *	370
380	35.5	237.7	10,000 *	20,000 *	15,900	20,000 *	380

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

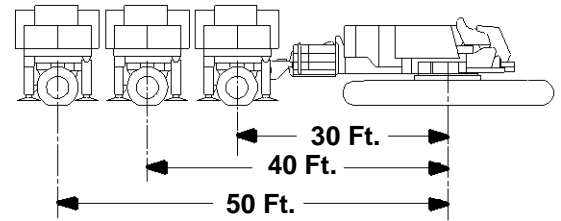

360 Ft. Boom 100 Ft. Jib, 15 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	50 Ft. Position	
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds
110	80.8	456.5	35,500 *	35,500 *
115	80.2	455.3	35,300 *	35,300 *
120	79.5	454.0	34,900 *	34,900 *
125	78.9	452.7	34,600 *	34,600 *
130	78.2	451.3	34,200 *	34,200 *
135	77.6	449.8	33,900 *	33,900 *
140	76.9	448.3	33,600 *	33,600 *
145	76.3	446.8	33,300 *	33,300 *
150	75.6	445.1	32,900 *	32,900 *
160	74.3	441.7	32,300 *	32,300 *
170	73.0	438.0	31,700 *	31,700 *
180	71.6	434.0	31,100 *	31,100 *
190	70.3	429.7	30,500 *	30,500 *
200	68.9	425.1	29,900 *	29,900 *
210	67.5	420.3	29,400 *	29,400 *
220	66.1	415.2	28,800 *	28,800 *
230	64.7	409.7	28,300 *	28,300 *
240	63.2	403.9	27,800 *	27,800 *
250	61.8	397.8	27,300 *	27,300 *
260	60.3	391.3	26,800 *	26,800 *
270	58.8	384.4	26,400 *	26,400 *
280	57.2	377.1	25,900 *	25,900 *
290	55.6	369.4	25,400 *	25,400 *
300	54.0	361.2	24,700 *	24,700 *
310	52.4	352.6	24,100 *	24,100 *
320	50.7	343.4	23,500 *	23,500 *
330	48.9	333.7	22,900 *	22,900 *
340	47.1	323.3	22,400 *	22,400 *
350	45.3	312.2	21,900 *	21,900 *
360	43.3	300.4	21,400 *	21,400 *
370	41.3	287.8	21,000 *	21,000 *
380	39.2	274.1	20,600 *	20,600 *
390	37.0	259.3	20,200 *	20,200 *
400	34.6	243.1	19,900 *	19,900 *

380 Ft. Boom 100 Ft. Jib, 15 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	50 Ft. Position
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds
115	80.6	475.8	35,100 *
120	80.0	474.6	34,800 *
125	79.4	473.3	34,600 *
130	78.8	472.0	34,300 *
135	78.1	470.6	33,900 *
140	77.5	469.2	33,600 *
145	76.9	467.7	33,300 *
150	76.3	466.1	33,000 *
160	75.0	462.8	32,500 *
170	73.7	459.3	31,900 *
180	72.4	455.5	31,300 *
190	71.2	451.4	30,700 *
200	69.8	447.1	30,200 *
210	68.5	442.5	29,600 *
220	67.2	437.6	29,100 *
230	65.8	432.4	28,600 *
240	64.5	427.0	28,100 *
250	63.1	421.2	27,600 *
260	61.7	415.0	27,200 *
270	60.3	408.6	26,700 *
280	58.8	401.7	26,300 *
290	57.3	394.5	25,900 *
300	55.8	386.9	25,400 *
310	54.3	378.9	24,800 *
320	52.7	370.4	24,200 *
330	51.1	361.4	23,600 *
340	49.5	351.8	23,100 *
350	47.8	341.7	22,600 *
360	46.0	331.0	22,100 *
370	44.2	319.6	21,600 *
380	42.3	307.4	21,200 *
390	40.3	294.3	20,800 *
400	38.3	280.3	20,400 *
410	36.1	265.0	20,100 *
420	33.8	248.4	19,800 *




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

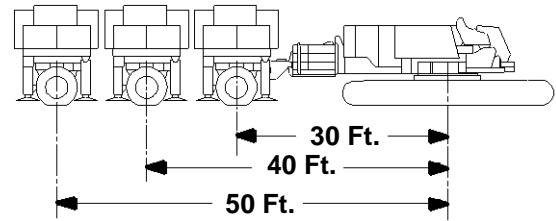

200 Ft. Boom
100 Ft. Jib, 30 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
105	80.6	286.1	20,800 *	20,800 *	20,800 *	20,800 *	20,800 *	20,800 *	105
110	79.5	284.3	20,300 *	20,300 *	20,300 *	20,300 *	20,300 *	20,300 *	110
115	78.5	282.4	19,800 *	19,800 *	19,800 *	19,800 *	19,800 *	19,800 *	115
120	77.4	280.3	19,400 *	19,400 *	19,400 *	19,400 *	19,400 *	19,400 *	120
125	76.3	278.1	18,900 *	18,900 *	18,900 *	18,900 *	18,900 *	18,900 *	125
130	75.3	275.9	18,500 *	18,500 *	18,500 *	18,500 *	18,500 *	18,500 *	130
135	74.2	273.5	18,100 *	18,100 *	18,100 *	18,100 *	18,100 *	18,100 *	135
140	73.1	271.0	17,700 *	17,700 *	17,700 *	17,700 *	17,700 *	17,700 *	140
145	72.0	268.4	17,300 *	17,300 *	17,300 *	17,300 *	17,300 *	17,300 *	145
150	70.9	265.6	17,000 *	17,000 *	17,000 *	17,000 *	17,000 *	17,000 *	150
160	68.6	259.7	16,300 *	16,300 *	16,300 *	16,300 *	16,300 *	16,300 *	160
170	66.3	253.3	15,700 *	15,700 *	15,700 *	15,700 *	15,700 *	15,700 *	170
180	63.9	246.2	15,100 *	15,100 *	15,100 *	15,100 *	15,100 *	15,100 *	180
190	61.4	238.5	14,600 *	14,600 *	14,600 *	14,600 *	14,600 *	14,600 *	190
200	58.9	230.1	14,100 *	14,100 *	14,100 *	14,100 *	14,100 *	14,100 *	200
210	56.2	220.9	13,700 *	13,700 *	13,700 *	13,700 *	13,700 *	13,700 *	210
220	53.4	210.8	13,300 *	13,300 *	13,300 *	13,300 *	13,300 *	13,300 *	220
230	50.5	199.5	13,000 *	13,000 *	13,000 *	13,000 *	13,000 *	13,000 *	230
240	47.4	187.0	12,600 *	12,600 *	12,600 *	12,600 *	12,600 *	12,600 *	240

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

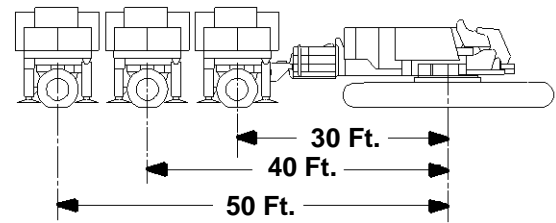

220 Ft. Boom

100 Ft. Jib, 30 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
110	80.2	305.3	20,700 *	20,700 *	20,700 *	20,700 *	20,700 *	20,700 *	110
115	79.3	303.5	20,200 *	20,200 *	20,200 *	20,200 *	20,200 *	20,200 *	115
120	78.3	301.6	19,700 *	19,700 *	19,700 *	19,700 *	19,700 *	19,700 *	120
125	77.3	299.6	19,300 *	19,300 *	19,300 *	19,300 *	19,300 *	19,300 *	125
130	76.3	297.5	18,900 *	18,900 *	18,900 *	18,900 *	18,900 *	18,900 *	130
135	75.3	295.3	18,500 *	18,500 *	18,500 *	18,500 *	18,500 *	18,500 *	135
140	74.3	292.9	18,100 *	18,100 *	18,100 *	18,100 *	18,100 *	18,100 *	140
145	73.3	290.5	17,800 *	17,800 *	17,800 *	17,800 *	17,800 *	17,800 *	145
150	72.2	288.0	17,400 *	17,400 *	17,400 *	17,400 *	17,400 *	17,400 *	150
160	70.2	282.6	16,700 *	16,700 *	16,700 *	16,700 *	16,700 *	16,700 *	160
170	68.0	276.7	16,100 *	16,100 *	16,100 *	16,100 *	16,100 *	16,100 *	170
180	65.9	270.3	15,600 *	15,600 *	15,600 *	15,600 *	15,600 *	15,600 *	180
190	63.6	263.3	15,100 *	15,100 *	15,100 *	15,100 *	15,100 *	15,100 *	190
200	61.3	255.8	14,600 *	14,600 *	14,600 *	14,600 *	14,600 *	14,600 *	200
210	59.0	247.5	14,200 *	14,200 *	14,200 *	14,200 *	14,200 *	14,200 *	210
220	56.5	238.6	13,700 *	13,700 *	13,700 *	13,700 *	13,700 *	13,700 *	220
230	53.9	228.8	13,400 *	13,400 *	13,400 *	13,400 *	13,400 *	13,400 *	230
240	51.2	218.1	13,000 *	13,000 *	13,000 *	13,000 *	13,000 *	13,000 *	240
250	48.4	206.3	12,700 *	12,700 *	12,700 *	12,700 *	12,700 *	12,700 *	250




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

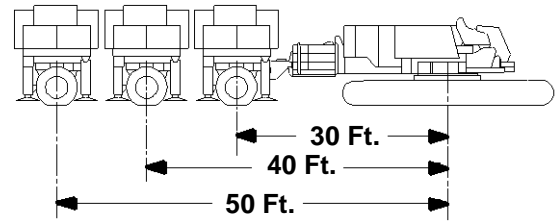

240 Ft. Boom
100 Ft. Jib, 30 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
110	80.8	326.1	21,000 *	21,000 *	21,000 *	21,000 *	21,000 *	21,000 *	110
115	79.9	324.4	20,500 *	20,500 *	20,500 *	20,500 *	20,500 *	20,500 *	115
120	79.0	322.7	20,100 *	20,100 *	20,100 *	20,100 *	20,100 *	20,100 *	120
125	78.1	320.8	19,700 *	19,700 *	19,700 *	19,700 *	19,700 *	19,700 *	125
130	77.2	318.8	19,300 *	19,300 *	19,300 *	19,300 *	19,300 *	19,300 *	130
135	76.2	316.8	18,900 *	18,900 *	18,900 *	18,900 *	18,900 *	18,900 *	135
140	75.3	314.6	18,500 *	18,500 *	18,500 *	18,500 *	18,500 *	18,500 *	140
145	74.4	312.4	18,100 *	18,100 *	18,100 *	18,100 *	18,100 *	18,100 *	145
150	73.4	310.0	17,800 *	17,800 *	17,800 *	17,800 *	17,800 *	17,800 *	150
160	71.5	305.0	17,200 *	17,200 *	17,200 *	17,200 *	17,200 *	17,200 *	160
170	69.5	299.6	16,600 *	16,600 *	16,600 *	16,600 *	16,600 *	16,600 *	170
180	67.5	293.7	16,000 *	16,000 *	16,000 *	16,000 *	16,000 *	16,000 *	180
190	65.5	287.3	15,500 *	15,500 *	15,500 *	15,500 *	15,500 *	15,500 *	190
200	63.4	280.5	15,000 *	15,000 *	15,000 *	15,000 *	15,000 *	15,000 *	200
210	61.2	273.0	14,600 *	14,600 *	14,600 *	14,600 *	14,600 *	14,600 *	210
220	59.0	264.9	14,200 *	14,200 *	14,200 *	14,200 *	14,200 *	14,200 *	220
230	56.7	256.2	13,800 *	13,800 *	13,800 *	13,800 *	13,800 *	13,800 *	230
240	54.4	246.7	13,400 *	13,400 *	13,400 *	13,400 *	13,400 *	13,400 *	240
250	51.9	236.4	13,100 *	13,100 *	13,100 *	13,100 *	13,100 *	13,100 *	250
260	49.3	225.1	12,800 *	12,800 *	12,800 *	12,800 *	12,800 *	12,800 *	260
270	46.5	212.7	12,600 *	12,600 *	12,600 *	12,600 *	12,600 *	12,600 *	270

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

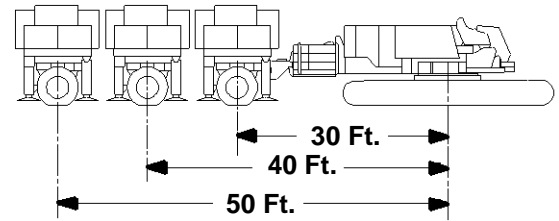

260 Ft. Boom

100 Ft. Jib, 30 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
115	80.5	345.3	20,900 *	20,900 *	20,900 *	20,900 *	20,900 *	20,900 *	115
120	79.7	343.6	20,400 *	20,400 *	20,400 *	20,400 *	20,400 *	20,400 *	120
125	78.8	341.9	20,000 *	20,000 *	20,000 *	20,000 *	20,000 *	20,000 *	125
130	77.9	340.0	19,600 *	19,600 *	19,600 *	19,600 *	19,600 *	19,600 *	130
135	77.1	338.1	19,300 *	19,300 *	19,300 *	19,300 *	19,300 *	19,300 *	135
140	76.2	336.1	18,900 *	18,900 *	18,900 *	18,900 *	18,900 *	18,900 *	140
145	75.3	334.0	18,500 *	18,500 *	18,500 *	18,500 *	18,500 *	18,500 *	145
150	74.4	331.8	18,200 *	18,200 *	18,200 *	18,200 *	18,200 *	18,200 *	150
160	72.6	327.2	17,600 *	17,600 *	17,600 *	17,600 *	17,600 *	17,600 *	160
170	70.8	322.1	17,000 *	17,000 *	17,000 *	17,000 *	17,000 *	17,000 *	170
180	69.0	316.7	16,400 *	16,400 *	16,400 *	16,400 *	16,400 *	16,400 *	180
190	67.1	310.8	15,900 *	15,900 *	15,900 *	15,900 *	15,900 *	15,900 *	190
200	65.1	304.4	15,400 *	15,400 *	15,400 *	15,400 *	15,400 *	15,400 *	200
210	63.2	297.6	15,000 *	15,000 *	15,000 *	15,000 *	15,000 *	15,000 *	210
220	61.2	290.2	14,600 *	14,600 *	14,600 *	14,600 *	14,600 *	14,600 *	220
230	59.1	282.3	14,200 *	14,200 *	14,200 *	14,200 *	14,200 *	14,200 *	230
240	56.9	273.8	13,800 *	13,800 *	13,800 *	13,800 *	13,800 *	13,800 *	240
250	54.7	264.6	13,500 *	13,500 *	13,500 *	13,500 *	13,500 *	13,500 *	250
260	52.4	254.6	13,200 *	13,200 *	13,200 *	13,200 *	13,200 *	13,200 *	260
270	50.0	243.8	12,900 *	12,900 *	12,900 *	12,900 *	12,900 *	12,900 *	270
280	47.5	232.0	10,800 *	10,800 *	10,800 *	10,800 *	10,800 *	10,800 *	280




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

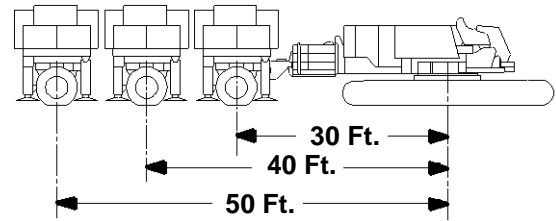

280 Ft. Boom
100 Ft. Jib, 30 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
115	80.9	366.4	27,100 *	27,100 *	27,100 *	27,100 *	27,100 *	27,100 *	115
120	80.1	364.9	26,600 *	26,600 *	26,600 *	26,600 *	26,600 *	26,600 *	120
125	79.3	363.2	26,200 *	26,200 *	26,200 *	26,200 *	26,200 *	26,200 *	125
130	78.5	361.5	25,700 *	25,700 *	25,700 *	25,700 *	25,700 *	25,700 *	130
135	77.7	359.7	25,200 *	25,200 *	25,200 *	25,200 *	25,200 *	25,200 *	135
140	76.9	357.8	24,800 *	24,800 *	24,800 *	24,800 *	24,800 *	24,800 *	140
145	76.0	355.9	24,400 *	24,400 *	24,400 *	24,400 *	24,400 *	24,400 *	145
150	75.2	353.8	24,000 *	24,000 *	24,000 *	24,000 *	24,000 *	24,000 *	150
160	73.5	349.5	23,200 *	23,200 *	23,200 *	23,200 *	23,200 *	23,200 *	160
170	71.8	344.7	22,500 *	22,500 *	22,500 *	22,500 *	22,500 *	22,500 *	170
180	70.1	339.7	21,900 *	21,900 *	21,900 *	21,900 *	21,900 *	21,900 *	180
190	68.3	334.2	21,200 *	21,200 *	21,200 *	21,200 *	21,200 *	21,200 *	190
200	66.6	328.3	20,700 *	20,700 *	20,700 *	20,700 *	20,700 *	20,700 *	200
210	64.7	322.0	20,100 *	20,100 *	20,100 *	20,100 *	20,100 *	20,100 *	210
220	62.9	315.3	19,600 *	19,600 *	19,600 *	19,600 *	19,600 *	19,600 *	220
230	61.0	308.0	19,100 *	19,100 *	19,100 *	19,100 *	19,100 *	19,100 *	230
240	59.0	300.2	18,700 *	18,700 *	18,700 *	18,700 *	18,700 *	18,700 *	240
250	57.0	291.9	18,300 *	18,300 *	18,300 *	18,300 *	18,300 *	18,300 *	250
260	55.0	282.9	17,900 *	17,900 *	17,900 *	17,900 *	17,900 *	17,900 *	260
270	52.8	273.2	17,500 *	17,500 *	17,500 *	17,500 *	17,500 *	17,500 *	270
280	50.6	262.8	17,200 *	17,200 *	17,200 *	17,200 *	17,200 *	17,200 *	280
290	48.3	251.5	16,900 *	16,900 *	16,900 *	16,900 *	16,900 *	16,900 *	290
300	45.9	239.3	16,600 *	16,600 *	16,600 *	16,600 *	16,600 *	16,600 *	300

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

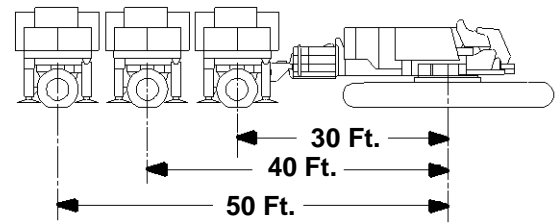

300 Ft. Boom

100 Ft. Jib, 30 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
120	80.7	385.6	27,000 *	27,000 *	27,000 *	27,000 *	27,000 *	27,000 *	120
125	79.9	384.1	26,500 *	26,500 *	26,500 *	26,500 *	26,500 *	26,500 *	125
130	79.1	382.5	26,100 *	26,100 *	26,100 *	26,100 *	26,100 *	26,100 *	130
135	78.3	380.8	25,600 *	25,600 *	25,600 *	25,600 *	25,600 *	25,600 *	135
140	77.6	379.0	25,200 *	25,200 *	25,200 *	25,200 *	25,200 *	25,200 *	140
145	76.8	377.1	24,800 *	24,800 *	24,800 *	24,800 *	24,800 *	24,800 *	145
150	76.0	375.2	24,400 *	24,400 *	24,400 *	24,400 *	24,400 *	24,400 *	150
160	74.4	371.1	23,700 *	23,700 *	23,700 *	23,700 *	23,700 *	23,700 *	160
170	72.8	366.7	23,000 *	23,000 *	23,000 *	23,000 *	23,000 *	23,000 *	170
180	71.2	361.9	22,300 *	22,300 *	22,300 *	22,300 *	22,300 *	22,300 *	180
190	69.6	356.8	21,700 *	21,700 *	21,700 *	21,700 *	21,700 *	21,700 *	190
200	67.9	351.3	21,100 *	21,100 *	21,100 *	21,100 *	21,100 *	21,100 *	200
210	66.2	345.4	20,600 *	20,600 *	20,600 *	20,600 *	20,600 *	20,600 *	210
220	64.5	339.2	20,100 *	20,100 *	20,100 *	20,100 *	20,100 *	20,100 *	220
230	62.7	332.4	19,600 *	19,600 *	19,600 *	19,600 *	19,600 *	19,600 *	230
240	60.9	325.3	19,100 *	19,100 *	19,100 *	19,100 *	19,100 *	19,100 *	240
250	59.1	317.6	18,700 *	18,700 *	18,700 *	18,700 *	18,700 *	18,700 *	250
260	57.2	309.4	18,300 *	18,300 *	18,300 *	18,300 *	18,300 *	18,300 *	260
270	55.3	300.6	17,900 *	17,900 *	17,900 *	17,900 *	17,900 *	17,900 *	270
280	53.3	291.2	17,600 *	17,600 *	17,600 *	17,600 *	17,600 *	17,600 *	280
290	51.2	281.1	17,300 *	17,300 *	17,300 *	17,300 *	17,300 *	17,300 *	290
300	49.0	270.3	17,000 *	17,000 *	17,000 *	17,000 *	17,000 *	17,000 *	300
310	46.8	258.5	16,700 *	16,700 *	16,700 *	16,700 *	16,700 *	16,700 *	310




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

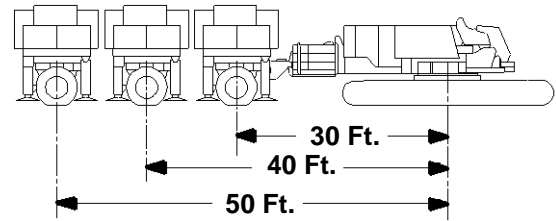

320 Ft. Boom
100 Ft. Jib, 30 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
125	80.4	404.8	26,800 *	26,800 *	26,800 *	26,800 *	26,800 *	26,800 *	125
130	79.7	403.3	26,400 *	26,400 *	26,400 *	26,400 *	26,400 *	26,400 *	130
135	78.9	401.7	25,900 *	25,900 *	25,900 *	25,900 *	25,900 *	25,900 *	135
140	78.2	400.0	25,500 *	25,500 *	25,500 *	25,500 *	25,500 *	25,500 *	140
145	77.5	398.3	25,100 *	25,100 *	25,100 *	25,100 *	25,100 *	25,100 *	145
150	76.7	396.4	24,700 *	24,700 *	24,700 *	24,700 *	24,700 *	24,700 *	150
160	75.2	392.6	24,000 *	24,000 *	24,000 *	24,000 *	24,000 *	24,000 *	160
170	73.7	388.4	23,300 *	23,300 *	23,300 *	23,300 *	23,300 *	23,300 *	170
180	72.2	383.9	22,700 *	22,700 *	22,700 *	22,700 *	22,700 *	22,700 *	180
190	70.7	379.1	22,100 *	22,100 *	22,100 *	22,100 *	22,100 *	22,100 *	190
200	69.1	374.0	21,500 *	21,500 *	21,500 *	21,500 *	21,500 *	21,500 *	200
210	67.5	368.4	21,000 *	21,000 *	21,000 *	21,000 *	21,000 *	21,000 *	210
220	65.9	362.6	20,500 *	20,500 *	20,500 *	20,500 *	20,500 *	20,500 *	220
230	64.3	356.3	20,000 *	20,000 *	20,000 *	20,000 *	20,000 *	20,000 *	230
240	62.6	349.6	19,500 *	19,500 *	19,500 *	19,500 *	19,500 *	19,500 *	240
250	60.9	342.5	19,100 *	19,100 *	19,100 *	19,100 *	19,100 *	19,100 *	250
260	59.1	335.0	18,700 *	18,700 *	18,700 *	18,700 *	18,700 *	18,700 *	260
270	57.4	326.9	18,300 *	18,300 *	18,300 *	18,300 *	18,300 *	18,300 *	270
280	55.5	318.3	18,000 *	18,000 *	18,000 *	18,000 *	18,000 *	18,000 *	280
290	53.6	309.1	17,700 *	17,700 *	17,700 *	17,700 *	17,700 *	17,700 *	290
300	51.7	299.3	17,300 *	17,300 *	17,300 *	17,300 *	17,300 *	17,300 *	300
310	49.7	288.8	17,100 *	17,100 *	17,100 *	17,100 *	17,100 *	17,100 *	310
320	47.6	277.5	16,800 *	16,800 *	16,800 *	16,800 *	16,800 *	16,800 *	320
330	45.4	265.3	15,300	16,600 *	16,600 *	16,600 *	16,600 *	16,600 *	330

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

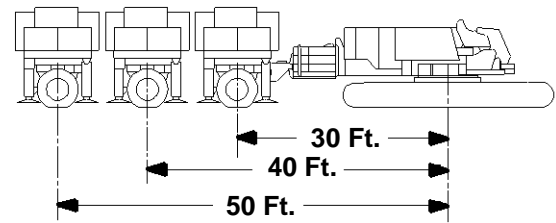

340 Ft. Boom
100 Ft. Jib, 30 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
125	80.9	425.5	27,100 *	27,100 *	27,100 *	27,100 *	125
130	80.2	424.1	26,700 *	26,700 *	26,700 *	26,700 *	130
135	79.5	422.5	26,300 *	26,300 *	26,300 *	26,300 *	135
140	78.8	420.9	25,900 *	25,900 *	25,900 *	25,900 *	140
145	78.1	419.3	25,500 *	25,500 *	25,500 *	25,500 *	145
150	77.4	417.6	25,100 *	25,100 *	25,100 *	25,100 *	150
160	76.0	413.9	24,400 *	24,400 *	24,400 *	24,400 *	160
170	74.5	409.9	23,700 *	23,700 *	23,700 *	23,700 *	170
180	73.1	405.7	23,100 *	23,100 *	23,100 *	23,100 *	180
190	71.6	401.2	22,500 *	22,500 *	22,500 *	22,500 *	190
200	70.2	396.3	21,900 *	21,900 *	21,900 *	21,900 *	200
210	68.7	391.1	21,400 *	21,400 *	21,400 *	21,400 *	210
220	67.2	385.6	20,900 *	20,900 *	20,900 *	20,900 *	220
230	65.6	379.7	20,400 *	20,400 *	20,400 *	20,400 *	230
240	64.1	373.5	19,900 *	19,900 *	19,900 *	19,900 *	240
250	62.5	366.9	19,500 *	19,500 *	19,500 *	19,500 *	250
260	60.8	359.8	19,100 *	19,100 *	19,100 *	19,100 *	260
270	59.2	352.3	18,700 *	18,700 *	18,700 *	18,700 *	270
280	57.5	344.4	18,400 *	18,400 *	18,400 *	18,400 *	280
290	55.8	335.9	18,000 *	18,000 *	18,000 *	18,000 *	290
300	54.0	327.0	17,700 *	17,700 *	17,700 *	17,700 *	300
310	52.1	317.4	17,400 *	17,400 *	17,400 *	17,400 *	310
320	50.2	307.2	17,100 *	17,100 *	17,100 *	17,100 *	320
330	48.3	296.2	16,900 *	16,900 *	16,900 *	16,900 *	330
340	46.2	284.5	16,700 *	16,700 *	16,700 *	16,700 *	340




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

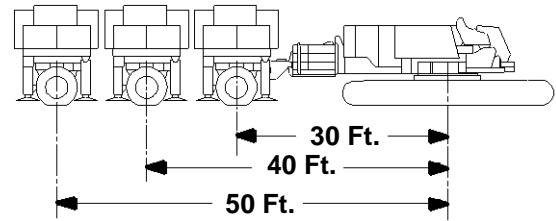

360 Ft. Boom 100 Ft. Jib, 30 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	50 Ft. Position	
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds
130	80.6	444.8	27,000 *	27,000 *
135	80.0	443.3	26,600 *	26,600 *
140	79.3	441.8	26,200 *	26,200 *
145	78.6	440.2	25,800 *	25,800 *
150	78.0	438.6	25,400 *	25,400 *
160	76.6	435.1	24,700 *	24,700 *
170	75.3	431.3	24,100 *	24,100 *
180	73.9	427.3	23,400 *	23,400 *
190	72.5	423.0	22,800 *	22,800 *
200	71.1	418.4	22,300 *	22,300 *
210	69.7	413.5	21,800 *	21,800 *
220	68.3	408.3	21,300 *	21,300 *
230	66.8	402.8	20,800 *	20,800 *
240	65.4	396.9	20,300 *	20,300 *
250	63.9	390.7	19,900 *	19,900 *
260	62.3	384.1	19,500 *	19,500 *
270	60.8	377.1	19,100 *	19,100 *
280	59.2	369.7	18,800 *	18,800 *
290	57.6	361.9	18,400 *	18,400 *
300	56.0	353.6	18,100 *	18,100 *
310	54.3	344.7	17,800 *	17,800 *
320	52.5	335.4	17,500 *	17,500 *
330	50.7	325.4	17,200 *	17,200 *
340	48.9	314.8	17,000 *	17,000 *
350	47.0	303.5	16,700 *	16,700 *
360	45.0	291.4	16,500 *	16,500 *

380 Ft. Boom 100 Ft. Jib, 30 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	50 Ft. Position
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds
130	81.0	465.4	27,300 *
135	80.4	464.0	26,900 *
140	79.8	462.6	26,500 *
145	79.1	461.0	26,100 *
150	78.5	459.5	25,800 *
160	77.2	456.2	25,100 *
170	75.9	452.6	24,400 *
180	74.6	448.8	23,800 *
190	73.3	444.7	23,200 *
200	72.0	440.3	22,600 *
210	70.6	435.7	22,100 *
220	69.3	430.7	21,600 *
230	67.9	425.5	21,100 *
240	66.5	419.9	20,700 *
250	65.1	414.1	20,300 *
260	63.7	407.9	19,900 *
270	62.2	401.3	19,500 *
280	60.8	394.4	19,100 *
290	59.3	387.1	18,800 *
300	57.7	379.3	18,400 *
310	56.2	371.1	18,100 *
320	54.5	362.5	17,800 *
330	52.9	353.3	17,600 *
340	51.2	343.6	17,300 *
350	49.5	333.3	17,100 *
360	47.7	322.3	16,800 *
370	45.8	310.6	16,600 *

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

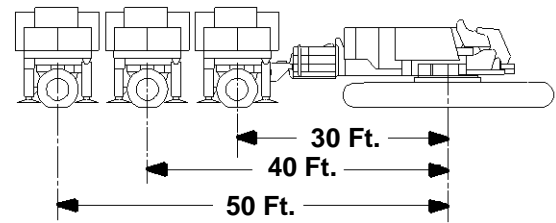

200 Ft. Boom
120 Ft. Jib, 5 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
70	80.1	325.7	37,000 *	37,000 *	37,000 *	37,000 *	37,000 *	37,000 *	70
75	79.2	324.6	36,200 *	36,200 *	36,200 *	36,200 *	36,200 *	36,200 *	75
80	78.3	323.5	35,300 *	35,300 *	35,300 *	35,300 *	35,300 *	35,300 *	80
85	77.4	322.2	34,500 *	34,500 *	34,500 *	34,500 *	34,500 *	34,500 *	85
90	76.5	320.9	33,700 *	33,700 *	33,700 *	33,700 *	33,700 *	33,700 *	90
95	75.5	319.5	32,900 *	32,900 *	32,900 *	32,900 *	32,900 *	32,900 *	95
100	74.6	318.0	32,100 *	32,100 *	32,100 *	32,100 *	32,100 *	32,100 *	100
105	73.7	316.4	31,300 *	31,300 *	31,300 *	31,300 *	31,300 *	31,300 *	105
110	72.7	314.7	30,600 *	30,600 *	30,600 *	30,600 *	30,600 *	30,600 *	110
115	71.8	313.0	29,800 *	29,800 *	29,800 *	29,800 *	29,800 *	29,800 *	115
120	70.8	311.1	29,100 *	29,100 *	29,100 *	29,100 *	29,100 *	29,100 *	120
125	69.9	309.1	28,400 *	28,400 *	28,400 *	28,400 *	28,400 *	28,400 *	125
130	68.9	307.1	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	27,700 *	130
135	68.0	304.9	27,000 *	27,000 *	27,000 *	27,000 *	27,000 *	27,000 *	135
140	67.0	302.7	26,400 *	26,400 *	26,400 *	26,400 *	26,400 *	26,400 *	140
145	66.0	300.3	25,700 *	25,700 *	25,700 *	25,700 *	25,700 *	25,700 *	145
150	65.0	297.9	25,100 *	25,100 *	25,100 *	25,100 *	25,100 *	25,100 *	150
160	63.0	292.6	23,900 *	23,900 *	23,900 *	23,900 *	23,900 *	23,900 *	160
170	60.9	286.9	22,800 *	22,800 *	22,800 *	22,800 *	22,800 *	22,800 *	170
180	58.8	280.7	21,700 *	21,700 *	21,700 *	21,700 *	21,700 *	21,700 *	180
190	56.7	274.0	20,800 *	20,800 *	20,800 *	20,800 *	20,800 *	20,800 *	190
200	54.5	266.7	19,800 *	19,800 *	19,800 *	19,800 *	19,800 *	19,800 *	200
210	52.2	258.7	19,000 *	19,000 *	19,000 *	19,000 *	19,000 *	19,000 *	210
220	49.9	250.1	18,100 *	18,100 *	18,100 *	18,100 *	18,100 *	18,100 *	220
230	47.5	240.8	17,400 *	17,400 *	17,400 *	17,400 *	17,400 *	17,400 *	230
240	44.9	230.6	16,600 *	16,600 *	16,600 *	16,600 *	16,600 *	16,600 *	240
250	42.2	219.4	15,900 *	15,900 *	15,900 *	15,900 *	15,900 *	15,900 *	250
260	39.4	207.1	15,300 *	15,300 *	15,300 *	15,300 *	15,300 *	15,300 *	260
270	36.4	193.5	14,700 *	14,700 *	14,700 *	14,700 *	14,700 *	14,700 *	270
280	33.2	178.1	14,100 *	14,100 *	14,100 *	14,100 *	14,100 *	14,100 *	280
290	29.6	160.5	13,600 *	13,600 *	13,600 *	13,600 *	13,600 *	13,600 *	290
300	25.5	139.8	13,200 *	13,200 *	13,200 *	13,200 *	13,200 *	13,200 *	300
310	20.6	114.2	12,800 *	12,800 *	12,800 *	12,800 *	12,800 *	12,800 *	310




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

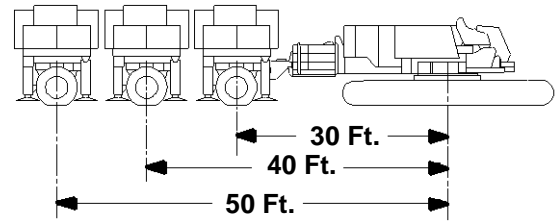

220 Ft. Boom

120 Ft. Jib, 5 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
70	80.7	346.1	37,300 *	37,300 *	37,300 *	37,300 *	37,300 *	37,300 *	70
75	79.8	345.1	36,600 *	36,600 *	36,600 *	36,600 *	36,600 *	36,600 *	75
80	79.0	344.0	35,800 *	35,800 *	35,800 *	35,800 *	35,800 *	35,800 *	80
85	78.1	342.8	35,100 *	35,100 *	35,100 *	35,100 *	35,100 *	35,100 *	85
90	77.3	341.6	34,300 *	34,300 *	34,300 *	34,300 *	34,300 *	34,300 *	90
95	76.4	340.3	33,500 *	33,500 *	33,500 *	33,500 *	33,500 *	33,500 *	95
100	75.5	338.9	32,800 *	32,800 *	32,800 *	32,800 *	32,800 *	32,800 *	100
105	74.7	337.4	32,100 *	32,100 *	32,100 *	32,100 *	32,100 *	32,100 *	105
110	73.8	335.8	31,300 *	31,300 *	31,300 *	31,300 *	31,300 *	31,300 *	110
115	72.9	334.1	30,600 *	30,600 *	30,600 *	30,600 *	30,600 *	30,600 *	115
120	72.0	332.4	29,900 *	29,900 *	29,900 *	29,900 *	29,900 *	29,900 *	120
125	71.1	330.6	29,200 *	29,200 *	29,200 *	29,200 *	29,200 *	29,200 *	125
130	70.2	328.7	28,600 *	28,600 *	28,600 *	28,600 *	28,600 *	28,600 *	130
135	69.3	326.7	27,900 *	27,900 *	27,900 *	27,900 *	27,900 *	27,900 *	135
140	68.4	324.6	27,300 *	27,300 *	27,300 *	27,300 *	27,300 *	27,300 *	140
145	67.5	322.4	26,700 *	26,700 *	26,700 *	26,700 *	26,700 *	26,700 *	145
150	66.6	320.1	26,000 *	26,000 *	26,000 *	26,000 *	26,000 *	26,000 *	150
160	64.7	315.2	24,900 *	24,900 *	24,900 *	24,900 *	24,900 *	24,900 *	160
170	62.8	309.9	23,800 *	23,800 *	23,800 *	23,800 *	23,800 *	23,800 *	170
180	60.9	304.2	22,700 *	22,700 *	22,700 *	22,700 *	22,700 *	22,700 *	180
190	58.9	298.0	21,800 *	21,800 *	21,800 *	21,800 *	21,800 *	21,800 *	190
200	56.9	291.3	20,800 *	20,800 *	20,800 *	20,800 *	20,800 *	20,800 *	200
210	54.8	284.1	19,900 *	19,900 *	19,900 *	19,900 *	19,900 *	19,900 *	210
220	52.7	276.4	19,100 *	19,100 *	19,100 *	19,100 *	19,100 *	19,100 *	220
230	50.5	268.0	18,300 *	18,300 *	18,300 *	18,300 *	18,300 *	18,300 *	230
240	48.3	258.9	17,600 *	17,600 *	17,600 *	17,600 *	17,600 *	17,600 *	240
250	45.9	249.1	16,900 *	16,900 *	16,900 *	16,900 *	16,900 *	16,900 *	250
260	43.5	238.4	16,200 *	16,200 *	16,200 *	16,200 *	16,200 *	16,200 *	260
270	40.9	226.7	15,600 *	15,600 *	15,600 *	15,600 *	15,600 *	15,600 *	270
280	38.2	213.8	15,000 *	15,000 *	15,000 *	15,000 *	15,000 *	15,000 *	280
290	35.3	199.6	14,500 *	14,500 *	14,500 *	14,500 *	14,500 *	14,500 *	290
300	32.1	183.6	14,000 *	14,000 *	14,000 *	14,000 *	14,000 *	14,000 *	300
310	28.6	165.4	13,500 *	13,500 *	13,500 *	13,500 *	13,500 *	13,500 *	310
320	24.6	143.9	13,100 *	13,100 *	13,100 *	13,100 *	13,100 *	13,100 *	320
330	19.9	117.4	12,700 *	12,700 *	12,700 *	12,700 *	12,700 *	12,700 *	330

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

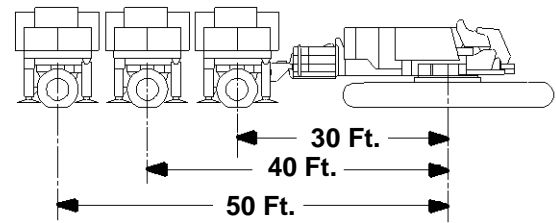

240 Ft. Boom
120 Ft. Jib, 5 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
75	80.4	365.5	35,100 *	35,100 *	35,100 *	35,100 *	35,100 *	35,100 *	75
80	79.6	364.4	34,500 *	34,500 *	34,500 *	34,500 *	34,500 *	34,500 *	80
85	78.8	363.3	33,800 *	33,800 *	33,800 *	33,800 *	33,800 *	33,800 *	85
90	78.0	362.2	33,100 *	33,100 *	33,100 *	33,100 *	33,100 *	33,100 *	90
95	77.2	360.9	32,400 *	32,400 *	32,400 *	32,400 *	32,400 *	32,400 *	95
100	76.3	359.6	31,700 *	31,700 *	31,700 *	31,700 *	31,700 *	31,700 *	100
105	75.5	358.2	31,100 *	31,100 *	31,100 *	31,100 *	31,100 *	31,100 *	105
110	74.7	356.7	30,400 *	30,400 *	30,400 *	30,400 *	30,400 *	30,400 *	110
115	73.9	355.2	29,800 *	29,800 *	29,800 *	29,800 *	29,800 *	29,800 *	115
120	73.0	353.6	29,100 *	29,100 *	29,100 *	29,100 *	29,100 *	29,100 *	120
125	72.2	351.8	28,500 *	28,500 *	28,500 *	28,500 *	28,500 *	28,500 *	125
130	71.4	350.1	27,900 *	27,900 *	27,900 *	27,900 *	27,900 *	27,900 *	130
135	70.5	348.2	27,300 *	27,300 *	27,300 *	27,300 *	27,300 *	27,300 *	135
140	69.7	346.2	26,700 *	26,700 *	26,700 *	26,700 *	26,700 *	26,700 *	140
145	68.8	344.2	26,200 *	26,200 *	26,200 *	26,200 *	26,200 *	26,200 *	145
150	68.0	342.0	25,600 *	25,600 *	25,600 *	25,600 *	25,600 *	25,600 *	150
160	66.2	337.5	24,600 *	24,600 *	24,600 *	24,600 *	24,600 *	24,600 *	160
170	64.5	332.6	23,500 *	23,500 *	23,500 *	23,500 *	23,500 *	23,500 *	170
180	62.7	327.2	22,600 *	22,600 *	22,600 *	22,600 *	22,600 *	22,600 *	180
190	60.8	321.5	21,600 *	21,600 *	21,600 *	21,600 *	21,600 *	21,600 *	190
200	59.0	315.4	20,800 *	20,800 *	20,800 *	20,800 *	20,800 *	20,800 *	200
210	57.1	308.7	20,000 *	20,000 *	20,000 *	20,000 *	20,000 *	20,000 *	210
220	55.1	301.6	19,200 *	19,200 *	19,200 *	19,200 *	19,200 *	19,200 *	220
230	53.1	294.0	18,400 *	18,400 *	18,400 *	18,400 *	18,400 *	18,400 *	230
240	51.1	285.8	17,700 *	17,700 *	17,700 *	17,700 *	17,700 *	17,700 *	240
250	49.0	276.9	17,100 *	17,100 *	17,100 *	17,100 *	17,100 *	17,100 *	250
260	46.8	267.4	16,400 *	16,400 *	16,400 *	16,400 *	16,400 *	16,400 *	260
270	44.5	257.1	15,800 *	15,800 *	15,800 *	15,800 *	15,800 *	15,800 *	270
280	42.2	245.9	15,200 *	15,200 *	15,200 *	15,200 *	15,200 *	15,200 *	280
290	39.7	233.7	14,700 *	14,700 *	14,700 *	14,700 *	14,700 *	14,700 *	290
300	37.0	220.3	14,200 *	14,200 *	14,200 *	14,200 *	14,200 *	14,200 *	300
310	34.2	205.5	13,700 *	13,700 *	13,700 *	13,700 *	13,700 *	13,700 *	310
320	31.1	189.0	13,300 *	13,300 *	13,300 *	13,300 *	13,300 *	13,300 *	320
330	27.7	170.1	12,900 *	12,900 *	12,900 *	12,900 *	12,900 *	12,900 *	330
340	23.9	147.9	12,500 *	12,500 *	12,500 *	12,500 *	12,500 *	12,500 *	340
350	19.3	120.5	12,200 *	12,200 *	12,200 *	12,200 *	12,200 *	12,200 *	350




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

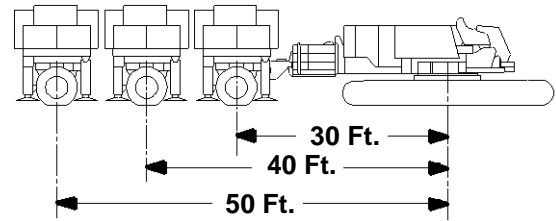

260 Ft. Boom
120 Ft. Jib, 5 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
75	80.9	385.8	36,800 *	36,800 *	36,800 *	36,800 *	36,800 *	36,800 *	75
80	80.2	384.8	36,300 *	36,300 *	36,300 *	36,300 *	36,300 *	36,300 *	80
85	79.4	383.8	35,700 *	35,700 *	35,700 *	35,700 *	35,700 *	35,700 *	85
90	78.6	382.7	35,000 *	35,000 *	35,000 *	35,000 *	35,000 *	35,000 *	90
95	77.9	381.5	34,400 *	34,400 *	34,400 *	34,400 *	34,400 *	34,400 *	95
100	77.1	380.3	33,700 *	33,700 *	33,700 *	33,700 *	33,700 *	33,700 *	100
105	76.3	379.0	33,100 *	33,100 *	33,100 *	33,100 *	33,100 *	33,100 *	105
110	75.5	377.6	32,400 *	32,400 *	32,400 *	32,400 *	32,400 *	32,400 *	110
115	74.7	376.1	31,800 *	31,800 *	31,800 *	31,800 *	31,800 *	31,800 *	115
120	74.0	374.6	31,200 *	31,200 *	31,200 *	31,200 *	31,200 *	31,200 *	120
125	73.2	373.0	30,500 *	30,500 *	30,500 *	30,500 *	30,500 *	30,500 *	125
130	72.4	371.3	29,900 *	29,900 *	29,900 *	29,900 *	29,900 *	29,900 *	130
135	71.6	369.5	29,300 *	29,300 *	29,300 *	29,300 *	29,300 *	29,300 *	135
140	70.8	367.7	28,700 *	28,700 *	28,700 *	28,700 *	28,700 *	28,700 *	140
145	70.0	365.7	28,200 *	28,200 *	28,200 *	28,200 *	28,200 *	28,200 *	145
150	69.2	363.7	27,600 *	27,600 *	27,600 *	27,600 *	27,600 *	27,600 *	150
160	67.5	359.5	26,500 *	26,500 *	26,500 *	26,500 *	26,500 *	26,500 *	160
170	65.9	354.9	25,500 *	25,500 *	25,500 *	25,500 *	25,500 *	25,500 *	170
180	64.2	349.9	24,500 *	24,500 *	24,500 *	24,500 *	24,500 *	24,500 *	180
190	62.5	344.6	23,500 *	23,500 *	23,500 *	23,500 *	23,500 *	23,500 *	190
200	60.8	338.8	22,600 *	22,600 *	22,600 *	22,600 *	22,600 *	22,600 *	200
210	59.0	332.7	21,700 *	21,700 *	21,700 *	21,700 *	21,700 *	21,700 *	210
220	57.2	326.1	20,900 *	20,900 *	20,900 *	20,900 *	20,900 *	20,900 *	220
230	55.4	319.1	20,100 *	20,100 *	20,100 *	20,100 *	20,100 *	20,100 *	230
240	53.5	311.5	19,400 *	19,400 *	19,400 *	19,400 *	19,400 *	19,400 *	240
250	51.6	303.5	18,700 *	18,700 *	18,700 *	18,700 *	18,700 *	18,700 *	250
260	49.6	294.8	18,000 *	18,000 *	18,000 *	18,000 *	18,000 *	18,000 *	260
270	47.6	285.6	17,300 *	17,300 *	17,300 *	17,300 *	17,300 *	17,300 *	270
280	45.5	275.6	16,700 *	16,700 *	16,700 *	16,700 *	16,700 *	16,700 *	280
290	43.3	264.8	16,100 *	16,100 *	16,100 *	16,100 *	16,100 *	16,100 *	290
300	40.9	253.2	15,600 *	15,600 *	15,600 *	15,600 *	15,600 *	15,600 *	300
310	38.5	240.5	15,100 *	15,100 *	15,100 *	15,100 *	15,100 *	15,100 *	310
320	36.0	226.6	12,800 *	12,800 *	12,800 *	12,800 *	12,800 *	12,800 *	320
330	33.2	211.3	10,500 *	10,500 *	10,500 *	10,500 *	10,500 *	10,500 *	330
340	30.2	194.2	8,100 *	8,100 *	8,100 *	8,100 *	8,100 *	8,100 *	340
350	27.0	174.7	5,800 *	5,800 *	5,800 *	5,800 *	5,800 *	5,800 *	350

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

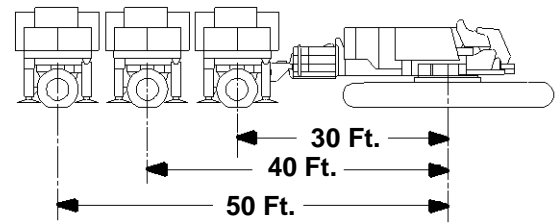

280 Ft. Boom
120 Ft. Jib, 5 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
85	80.5	404.0	34,900 *	34,900 *	34,900 *	34,900 *	34,900 *	34,900 *	85
90	79.8	402.9	34,300 *	34,300 *	34,300 *	34,300 *	34,300 *	34,300 *	90
95	79.1	401.8	33,700 *	33,700 *	33,700 *	33,700 *	33,700 *	33,700 *	95
100	78.3	400.6	33,000 *	33,000 *	33,000 *	33,000 *	33,000 *	33,000 *	100
105	77.6	399.4	32,500 *	32,500 *	32,500 *	32,500 *	32,500 *	32,500 *	105
110	76.9	398.1	31,900 *	31,900 *	31,900 *	31,900 *	31,900 *	31,900 *	110
115	76.1	396.7	31,300 *	31,300 *	31,300 *	31,300 *	31,300 *	31,300 *	115
120	75.4	395.2	30,700 *	30,700 *	30,700 *	30,700 *	30,700 *	30,700 *	120
125	74.6	393.7	30,100 *	30,100 *	30,100 *	30,100 *	30,100 *	30,100 *	125
130	73.9	392.1	29,600 *	29,600 *	29,600 *	29,600 *	29,600 *	29,600 *	130
135	73.1	390.4	29,000 *	29,000 *	29,000 *	29,000 *	29,000 *	29,000 *	135
140	72.4	388.7	28,500 *	28,500 *	28,500 *	28,500 *	28,500 *	28,500 *	140
145	71.6	386.9	27,900 *	27,900 *	27,900 *	27,900 *	27,900 *	27,900 *	145
150	70.8	385.0	27,400 *	27,400 *	27,400 *	27,400 *	27,400 *	27,400 *	150
160	69.3	381.0	26,400 *	26,400 *	26,400 *	26,400 *	26,400 *	26,400 *	160
170	67.8	376.6	25,400 *	25,400 *	25,400 *	25,400 *	25,400 *	25,400 *	170
180	66.2	372.0	24,500 *	24,500 *	24,500 *	24,500 *	24,500 *	24,500 *	180
190	64.6	367.0	23,600 *	23,600 *	23,600 *	23,600 *	23,600 *	23,600 *	190
200	63.0	361.6	22,800 *	22,800 *	22,800 *	22,800 *	22,800 *	22,800 *	200
210	61.3	355.9	21,900 *	21,900 *	21,900 *	21,900 *	21,900 *	21,900 *	210
220	59.7	349.7	21,200 *	21,200 *	21,200 *	21,200 *	21,200 *	21,200 *	220
230	58.0	343.2	20,400 *	20,400 *	20,400 *	20,400 *	20,400 *	20,400 *	230
240	56.2	336.2	19,700 *	19,700 *	19,700 *	19,700 *	19,700 *	19,700 *	240
250	54.4	328.8	19,000 *	19,000 *	19,000 *	19,000 *	19,000 *	19,000 *	250
260	52.6	320.8	18,400 *	18,400 *	18,400 *	18,400 *	18,400 *	18,400 *	260
270	50.7	312.4	17,800 *	17,800 *	17,800 *	17,800 *	17,800 *	17,800 *	270
280	48.8	303.3	17,200 *	17,200 *	17,200 *	17,200 *	17,200 *	17,200 *	280
290	46.8	293.6	16,600 *	16,600 *	16,600 *	16,600 *	16,600 *	16,600 *	290
300	44.8	283.2	16,100 *	16,100 *	16,100 *	16,100 *	16,100 *	16,100 *	300
310	42.6	272.0	15,600 *	15,600 *	15,600 *	15,600 *	15,600 *	15,600 *	310
320	40.4	259.8	15,100 *	15,100 *	15,100 *	15,100 *	15,100 *	15,100 *	320
330	38.0	246.7	14,600 *	14,600 *	14,600 *	14,600 *	14,600 *	14,600 *	330
340	35.5	232.3	14,200 *	14,200 *	14,200 *	14,200 *	14,200 *	14,200 *	340
350	32.9	216.4	13,800 *	13,800 *	13,800 *	13,800 *	13,800 *	13,800 *	350
360	30.0	198.7	13,300	13,400 *	13,400 *	13,400 *	13,400 *	13,400 *	360
370	26.8	178.5	11,900	13,100 *	13,100 *	13,100 *	13,100 *	13,100 *	370
380	23.1	154.9	10,300 *	12,800 *	12,800 *	12,800 *	12,800 *	12,800 *	380




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

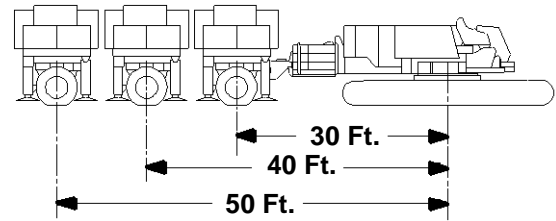

300 Ft. Boom
120 Ft. Jib, 5 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
85	81.0	424.4	34,800 *	34,800 *	34,800 *	34,800 *	34,800 *	34,800 *	85
90	80.3	423.4	34,300 *	34,300 *	34,300 *	34,300 *	34,300 *	34,300 *	90
95	79.6	422.3	33,800 *	33,800 *	33,800 *	33,800 *	33,800 *	33,800 *	95
100	78.9	421.2	33,200 *	33,200 *	33,200 *	33,200 *	33,200 *	33,200 *	100
105	78.2	420.0	32,700 *	32,700 *	32,700 *	32,700 *	32,700 *	32,700 *	105
110	77.5	418.8	32,100 *	32,100 *	32,100 *	32,100 *	32,100 *	32,100 *	110
115	76.8	417.4	31,600 *	31,600 *	31,600 *	31,600 *	31,600 *	31,600 *	115
120	76.1	416.1	31,000 *	31,000 *	31,000 *	31,000 *	31,000 *	31,000 *	120
125	75.4	414.6	30,500 *	30,500 *	30,500 *	30,500 *	30,500 *	30,500 *	125
130	74.7	413.1	30,000 *	30,000 *	30,000 *	30,000 *	30,000 *	30,000 *	130
135	74.0	411.5	29,400 *	29,400 *	29,400 *	29,400 *	29,400 *	29,400 *	135
140	73.2	409.9	28,900 *	28,900 *	28,900 *	28,900 *	28,900 *	28,900 *	140
145	72.5	408.1	28,400 *	28,400 *	28,400 *	28,400 *	28,400 *	28,400 *	145
150	71.8	406.3	27,900 *	27,900 *	27,900 *	27,900 *	27,900 *	27,900 *	150
160	70.3	402.5	27,000 *	27,000 *	27,000 *	27,000 *	27,000 *	27,000 *	160
170	68.9	398.4	26,000 *	26,000 *	26,000 *	26,000 *	26,000 *	26,000 *	170
180	67.4	394.0	25,100 *	25,100 *	25,100 *	25,100 *	25,100 *	25,100 *	180
190	65.9	389.3	24,200 *	24,200 *	24,200 *	24,200 *	24,200 *	24,200 *	190
200	64.4	384.3	23,400 *	23,400 *	23,400 *	23,400 *	23,400 *	23,400 *	200
210	62.8	378.9	22,600 *	22,600 *	22,600 *	22,600 *	22,600 *	22,600 *	210
220	61.3	373.2	21,800 *	21,800 *	21,800 *	21,800 *	21,800 *	21,800 *	220
230	59.7	367.1	21,100 *	21,100 *	21,100 *	21,100 *	21,100 *	21,100 *	230
240	58.1	360.6	20,400 *	20,400 *	20,400 *	20,400 *	20,400 *	20,400 *	240
250	56.4	353.7	19,700 *	19,700 *	19,700 *	19,700 *	19,700 *	19,700 *	250
260	54.7	346.3	19,100 *	19,100 *	19,100 *	19,100 *	19,100 *	19,100 *	260
270	53.0	338.5	18,500 *	18,500 *	18,500 *	18,500 *	18,500 *	18,500 *	270
280	51.2	330.2	17,900 *	17,900 *	17,900 *	17,900 *	17,900 *	17,900 *	280
290	49.4	321.3	17,300 *	17,300 *	17,300 *	17,300 *	17,300 *	17,300 *	290
300	47.5	311.8	16,800 *	16,800 *	16,800 *	16,800 *	16,800 *	16,800 *	300
310	45.6	301.7	16,300 *	16,300 *	16,300 *	16,300 *	16,300 *	16,300 *	310
320	43.6	290.9	15,800 *	15,800 *	15,800 *	15,800 *	15,800 *	15,800 *	320
330	41.5	279.2	15,300 *	15,300 *	15,300 *	15,300 *	15,300 *	15,300 *	330
340	39.3	266.7	14,900 *	14,900 *	14,900 *	14,900 *	14,900 *	14,900 *	340
350	37.0	253.1	14,000	14,500 *	14,500 *	14,500 *	14,500 *	14,500 *	350
360	34.6	238.2	12,500	14,100 *	14,100 *	14,100 *	14,100 *	14,100 *	360
370	32.0	221.9	10,800 *	13,700 *	13,700 *	13,700 *	13,700 *	13,700 *	370
380	29.2	203.6	9,200 *	13,400 *	13,400 *	13,400 *	13,400 *	13,400 *	380
390	26.1	182.9	7,600 *	13,100 *	13,100 *	13,100 *	13,100 *	13,100 *	390
400	22.5	158.6	6,000 *	12,800 *	12,100	12,800 *	12,800 *	12,800 *	400




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

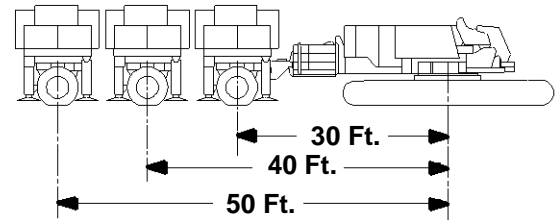

320 Ft. Boom
120 Ft. Jib, 5 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position	40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
90	80.7	443.8	34,500 *	34,500 *	34,500 *	34,500 *	34,500 *	90
95	80.1	442.7	34,100 *	34,100 *	34,100 *	34,100 *	34,100 *	95
100	79.4	441.7	33,500 *	33,500 *	33,500 *	33,500 *	33,500 *	100
105	78.7	440.5	33,000 *	33,000 *	33,000 *	33,000 *	33,000 *	105
110	78.1	439.4	32,500 *	32,500 *	32,500 *	32,500 *	32,500 *	110
115	77.4	438.1	32,000 *	32,000 *	32,000 *	32,000 *	32,000 *	115
120	76.7	436.8	31,500 *	31,500 *	31,500 *	31,500 *	31,500 *	120
125	76.1	435.4	31,000 *	31,000 *	31,000 *	31,000 *	31,000 *	125
130	75.4	434.0	30,500 *	30,500 *	30,500 *	30,500 *	30,500 *	130
135	74.7	432.5	30,000 *	30,000 *	30,000 *	30,000 *	30,000 *	135
140	74.0	430.9	29,500 *	29,500 *	29,500 *	29,500 *	29,500 *	140
145	73.3	429.3	29,000 *	29,000 *	29,000 *	29,000 *	29,000 *	145
150	72.7	427.6	28,500 *	28,500 *	28,500 *	28,500 *	28,500 *	150
160	71.3	424.0	27,600 *	27,600 *	27,600 *	27,600 *	27,600 *	160
170	69.9	420.1	26,600 *	26,600 *	26,600 *	26,600 *	26,600 *	170
180	68.5	415.9	25,800 *	25,800 *	25,800 *	25,800 *	25,800 *	180
190	67.1	411.5	24,900 *	24,900 *	24,900 *	24,900 *	24,900 *	190
200	65.6	406.7	24,100 *	24,100 *	24,100 *	24,100 *	24,100 *	200
210	64.2	401.6	23,300 *	23,300 *	23,300 *	23,300 *	23,300 *	210
220	62.7	396.2	22,600 *	22,600 *	22,600 *	22,600 *	22,600 *	220
230	61.2	390.5	21,800 *	21,800 *	21,800 *	21,800 *	21,800 *	230
240	59.7	384.4	21,100 *	21,100 *	21,100 *	21,100 *	21,100 *	240
250	58.1	377.9	20,400 *	20,400 *	20,400 *	20,400 *	20,400 *	250
260	56.6	371.1	19,800 *	19,800 *	19,800 *	19,800 *	19,800 *	260
270	55.0	363.8	19,200 *	19,200 *	19,200 *	19,200 *	19,200 *	270
280	53.3	356.1	18,600 *	18,600 *	18,600 *	18,600 *	18,600 *	280
290	51.7	347.9	18,000 *	18,000 *	18,000 *	18,000 *	18,000 *	290
300	49.9	339.2	17,500 *	17,500 *	17,500 *	17,500 *	17,500 *	300
310	48.2	330.0	17,000 *	17,000 *	17,000 *	17,000 *	17,000 *	310
320	46.3	320.1	16,500 *	16,500 *	16,500 *	16,500 *	16,500 *	320
330	44.5	309.6	16,000 *	16,000 *	16,000 *	16,000 *	16,000 *	330
340	42.5	298.4	15,500 *	15,500 *	15,500 *	15,500 *	15,500 *	340
350	40.5	286.3	15,100 *	15,100 *	15,100 *	15,100 *	15,100 *	350
360	38.4	273.4	14,700 *	14,700 *	14,700 *	14,700 *	14,700 *	360
370	36.1	259.3	14,300 *	13,300	14,300 *	14,300 *	14,300 *	370
380	33.8	244.0	13,900 *	11,500 *	13,900 *	13,900 *	13,900 *	380
390	31.2	227.2	13,600 *	9,800 *	13,600 *	13,600 *	13,600 *	390
400	28.5	208.4	11,200 *	8,100 *	13,300 *	13,300 *	13,300 *	400
410	25.4	187.1	8,900 *	6,500 *	13,000 *	12,500	13,000 *	410
420	21.9	162.1	6,500 *	4,900 *	12,700 *	11,000 *	12,700 *	420




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

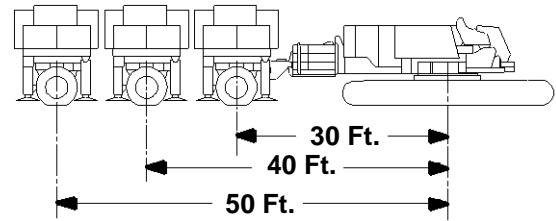

**340 Ft. Boom
 120 Ft. Jib, 5 Degree Offset**


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
95	80.5	463.1	34,000 *	34,000 *	34,000 *	34,000 *	95
100	79.9	462.1	33,600 *	33,600 *	33,600 *	33,600 *	100
105	79.2	461.0	33,100 *	33,100 *	33,100 *	33,100 *	105
110	78.6	459.9	32,600 *	32,600 *	32,600 *	32,600 *	110
115	78.0	458.7	32,100 *	32,100 *	32,100 *	32,100 *	115
120	77.3	457.5	31,600 *	31,600 *	31,600 *	31,600 *	120
125	76.7	456.1	31,200 *	31,200 *	31,200 *	31,200 *	125
130	76.0	454.8	30,700 *	30,700 *	30,700 *	30,700 *	130
135	75.4	453.3	30,200 *	30,200 *	30,200 *	30,200 *	135
140	74.7	451.8	29,800 *	29,800 *	29,800 *	29,800 *	140
145	74.1	450.3	29,300 *	29,300 *	29,300 *	29,300 *	145
150	73.4	448.7	28,800 *	28,800 *	28,800 *	28,800 *	150
160	72.1	445.2	27,900 *	27,900 *	27,900 *	27,900 *	160
170	70.8	441.5	27,100 *	27,100 *	27,100 *	27,100 *	170
180	69.5	437.6	26,200 *	26,200 *	26,200 *	26,200 *	180
190	68.1	433.4	25,400 *	25,400 *	25,400 *	25,400 *	190
200	66.8	428.8	24,600 *	24,600 *	24,600 *	24,600 *	200
210	65.4	424.0	23,900 *	23,900 *	23,900 *	23,900 *	210
220	64.0	418.9	23,100 *	23,100 *	23,100 *	23,100 *	220
230	62.6	413.5	22,400 *	22,400 *	22,400 *	22,400 *	230
240	61.2	407.8	21,700 *	21,700 *	21,700 *	21,700 *	240
250	59.7	401.7	21,100 *	21,100 *	21,100 *	21,100 *	250
260	58.2	395.3	20,400 *	20,400 *	20,400 *	20,400 *	260
270	56.7	388.5	19,800 *	19,800 *	19,800 *	19,800 *	270
280	55.2	381.3	19,200 *	19,200 *	19,200 *	19,200 *	280
290	53.6	373.7	18,700 *	18,700 *	18,700 *	18,700 *	290
300	52.0	365.6	18,100 *	18,100 *	18,100 *	18,100 *	300
310	50.4	357.0	17,600 *	17,600 *	17,600 *	17,600 *	310
320	48.7	348.0	17,100 *	17,100 *	17,100 *	17,100 *	320
330	47.0	338.4	16,600 *	16,600 *	16,600 *	16,600 *	330
340	45.2	328.2	16,100 *	16,100 *	16,100 *	16,100 *	340
350	43.4	317.3	15,600 *	15,700 *	15,700 *	15,700 *	350
360	41.5	305.7	14,000 *	15,300 *	15,300 *	15,300 *	360
370	39.5	293.3	12,100 *	14,900 *	14,900 *	14,900 *	370
380	37.5	279.9	10,300 *	14,500 *	14,500 *	14,500 *	380
390	35.3	265.4	8,600 *	14,100 *	14,100 *	14,100 *	390
400	33.0	249.7	7,000 *	13,800 *	13,100 *	13,800 *	400
410	30.5	232.3	5,400 *	13,500 *	11,500 *	13,500 *	410
420	27.8	213.0		13,200 *	9,900 *	13,200 *	420
430	24.8	191.2		12,900 *	8,300 *	12,900 *	430
440	21.4	165.6		12,700 *	6,700 *	12,700 *	440

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

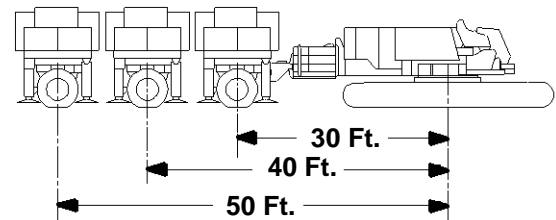

360 Ft. Boom 120 Ft. Jib, 5 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	50 Ft. Position
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds
95	80.9	483.5	33,700 *
100	80.3	482.5	33,300 *
105	79.7	481.5	33,000 *
110	79.1	480.4	32,500 *
115	78.5	479.3	32,100 *
120	77.9	478.1	31,700 *
125	77.2	476.8	31,200 *
130	76.6	475.5	30,800 *
135	76.0	474.1	30,400 *
140	75.4	472.7	29,900 *
145	74.8	471.2	29,500 *
150	74.2	469.7	29,100 *
160	72.9	466.4	28,200 *
170	71.6	462.9	27,400 *
180	70.4	459.1	26,600 *
190	69.1	455.1	25,800 *
200	67.8	450.8	25,000 *
210	66.5	446.2	24,300 *
220	65.2	441.4	23,600 *
230	63.8	436.3	22,900 *
240	62.5	430.8	22,200 *
250	61.1	425.1	21,600 *
260	59.7	419.0	20,900 *
270	58.3	412.6	20,300 *
280	56.9	405.9	19,700 *
290	55.4	398.7	19,200 *
300	53.9	391.2	18,700 *
310	52.4	383.2	18,100 *
320	50.8	374.8	17,600 *
330	49.3	366.0	17,200 *
340	47.6	356.6	16,700 *
350	45.9	346.6	16,300 *
360	44.2	336.1	15,800 *
370	42.4	324.8	15,400 *
380	40.6	312.8	15,000 *
390	38.6	300.0	14,700 *
400	36.6	286.2	14,300 *
410	34.5	271.4	14,000 *
420	32.2	255.2	13,700 *
430	29.8	237.4	13,400 *
440	27.2	217.6	13,100 *
450	24.2	195.2	12,900 *

380 Ft. Boom 120 Ft. Jib, 5 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	50 Ft. Position
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds
100	80.7	502.9	33,100 *
105	80.1	501.9	32,700 *
110	79.5	500.9	32,400 *
115	78.9	499.8	32,100 *
120	78.4	498.6	31,700 *
125	77.8	497.4	31,200 *
130	77.2	496.2	30,800 *
135	76.6	494.9	30,400 *
140	76.0	493.5	30,100 *
145	75.4	492.1	29,700 *
150	74.8	490.6	29,300 *
160	73.6	487.5	28,500 *
170	72.4	484.1	27,700 *
180	71.2	480.5	26,900 *
190	70.0	476.7	26,100 *
200	68.7	472.6	25,400 *
210	67.5	468.2	24,700 *
220	66.2	463.6	24,000 *
230	65.0	458.8	23,300 *
240	63.7	453.6	22,700 *
250	62.4	448.2	22,000 *
260	61.1	442.4	21,400 *
270	59.7	436.4	20,800 *
280	58.4	430.0	20,200 *
290	57.0	423.3	19,700 *
300	55.6	416.2	19,200 *
310	54.2	408.7	18,600 *
320	52.7	400.9	18,200 *
330	51.2	392.6	17,700 *
340	49.7	383.9	17,200 *
350	48.2	374.7	16,800 *
360	46.6	364.9	16,400 *
370	44.9	354.7	15,900 *
380	43.2	343.7	15,600 *
390	41.5	332.2	15,200 *
400	39.7	319.8	14,800 *
410	37.8	306.6	14,500 *
420	35.8	292.5	14,100 *
430	33.7	277.2	13,800 *
440	31.5	260.5	13,500 *
450	29.1	242.3	13,300 *
460	26.6	222.1	13,000 *
470	23.7	199.1	10,500 *




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

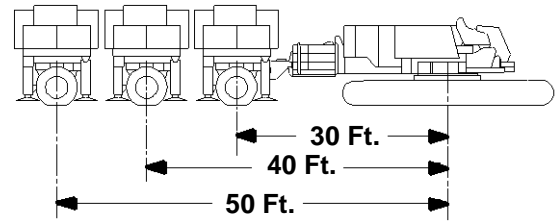

200 Ft. Boom

120 Ft. Jib, 15 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
90	81.0	318.5	26,400 *	26,400 *	26,400 *	26,400 *	26,400 *	26,400 *	90
95	80.0	317.1	25,800 *	25,800 *	25,800 *	25,800 *	25,800 *	25,800 *	95
100	79.1	315.6	25,200 *	25,200 *	25,200 *	25,200 *	25,200 *	25,200 *	100
105	78.2	314.0	24,600 *	24,600 *	24,600 *	24,600 *	24,600 *	24,600 *	105
110	77.2	312.4	24,100 *	24,100 *	24,100 *	24,100 *	24,100 *	24,100 *	110
115	76.3	310.6	23,600 *	23,600 *	23,600 *	23,600 *	23,600 *	23,600 *	115
120	75.3	308.8	23,000 *	23,000 *	23,000 *	23,000 *	23,000 *	23,000 *	120
125	74.3	306.8	22,500 *	22,500 *	22,500 *	22,500 *	22,500 *	22,500 *	125
130	73.4	304.8	22,000 *	22,000 *	22,000 *	22,000 *	22,000 *	22,000 *	130
135	72.4	302.6	21,500 *	21,500 *	21,500 *	21,500 *	21,500 *	21,500 *	135
140	71.4	300.4	21,100 *	21,100 *	21,100 *	21,100 *	21,100 *	21,100 *	140
145	70.4	298.0	20,600 *	20,600 *	20,600 *	20,600 *	20,600 *	20,600 *	145
150	69.4	295.5	20,200 *	20,200 *	20,200 *	20,200 *	20,200 *	20,200 *	150
160	67.4	290.3	19,400 *	19,400 *	19,400 *	19,400 *	19,400 *	19,400 *	160
170	65.3	284.5	18,600 *	18,600 *	18,600 *	18,600 *	18,600 *	18,600 *	170
180	63.2	278.3	17,800 *	17,800 *	17,800 *	17,800 *	17,800 *	17,800 *	180
190	61.1	271.6	17,100 *	17,100 *	17,100 *	17,100 *	17,100 *	17,100 *	190
200	58.8	264.3	16,500 *	16,500 *	16,500 *	16,500 *	16,500 *	16,500 *	200
210	56.5	256.3	15,900 *	15,900 *	15,900 *	15,900 *	15,900 *	15,900 *	210
220	54.2	247.7	15,300 *	15,300 *	15,300 *	15,300 *	15,300 *	15,300 *	220
230	51.7	238.3	14,700 *	14,700 *	14,700 *	14,700 *	14,700 *	14,700 *	230
240	49.1	228.0	14,200 *	14,200 *	14,200 *	14,200 *	14,200 *	14,200 *	240
250	46.4	216.8	13,800 *	13,800 *	13,800 *	13,800 *	13,800 *	13,800 *	250
260	43.6	204.4	13,400 *	13,400 *	13,400 *	13,400 *	13,400 *	13,400 *	260
270	40.5	190.6	13,000 *	13,000 *	13,000 *	13,000 *	13,000 *	13,000 *	270
280	37.2	175.0	12,600 *	12,600 *	12,600 *	12,600 *	12,600 *	12,600 *	280
290	33.5	157.1	12,400 *	12,400 *	12,400 *	12,400 *	12,400 *	12,400 *	290

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

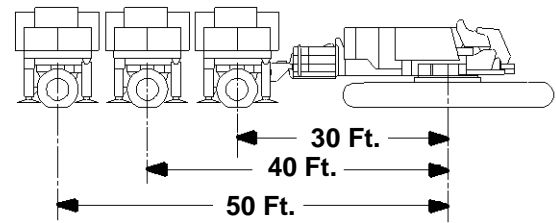

220 Ft. Boom

120 Ft. Jib, 15 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
95	80.6	337.8	26,200 *	26,200 *	26,200 *	26,200 *	26,200 *	26,200 *	95
100	79.8	336.4	25,600 *	25,600 *	25,600 *	25,600 *	25,600 *	25,600 *	100
105	78.9	334.9	25,000 *	25,000 *	25,000 *	25,000 *	25,000 *	25,000 *	105
110	78.0	333.3	24,500 *	24,500 *	24,500 *	24,500 *	24,500 *	24,500 *	110
115	77.1	331.7	24,000 *	24,000 *	24,000 *	24,000 *	24,000 *	24,000 *	115
120	76.2	330.0	23,500 *	23,500 *	23,500 *	23,500 *	23,500 *	23,500 *	120
125	75.3	328.1	23,000 *	23,000 *	23,000 *	23,000 *	23,000 *	23,000 *	125
130	74.4	326.2	22,500 *	22,500 *	22,500 *	22,500 *	22,500 *	22,500 *	130
135	73.5	324.2	22,100 *	22,100 *	22,100 *	22,100 *	22,100 *	22,100 *	135
140	72.6	322.1	21,600 *	21,600 *	21,600 *	21,600 *	21,600 *	21,600 *	140
145	71.7	319.9	21,200 *	21,200 *	21,200 *	21,200 *	21,200 *	21,200 *	145
150	70.7	317.6	20,700 *	20,700 *	20,700 *	20,700 *	20,700 *	20,700 *	150
160	68.9	312.8	19,900 *	19,900 *	19,900 *	19,900 *	19,900 *	19,900 *	160
170	66.9	307.5	19,200 *	19,200 *	19,200 *	19,200 *	19,200 *	19,200 *	170
180	65.0	301.7	18,400 *	18,400 *	18,400 *	18,400 *	18,400 *	18,400 *	180
190	63.0	295.6	17,700 *	17,700 *	17,700 *	17,700 *	17,700 *	17,700 *	190
200	61.0	288.9	17,100 *	17,100 *	17,100 *	17,100 *	17,100 *	17,100 *	200
210	58.9	281.6	16,500 *	16,500 *	16,500 *	16,500 *	16,500 *	16,500 *	210
220	56.8	273.8	15,900 *	15,900 *	15,900 *	15,900 *	15,900 *	15,900 *	220
230	54.6	265.4	15,400 *	15,400 *	15,400 *	15,400 *	15,400 *	15,400 *	230
240	52.3	256.3	14,900 *	14,900 *	14,900 *	14,900 *	14,900 *	14,900 *	240
250	49.9	246.4	14,400 *	14,400 *	14,400 *	14,400 *	14,400 *	14,400 *	250
260	47.4	235.6	13,900 *	13,900 *	13,900 *	13,900 *	13,900 *	13,900 *	260
270	44.8	223.8	13,500 *	13,500 *	13,500 *	13,500 *	13,500 *	13,500 *	270
280	42.0	210.9	13,200 *	13,200 *	13,200 *	13,200 *	13,200 *	13,200 *	280
290	39.1	196.5	12,800 *	12,800 *	12,800 *	12,800 *	12,800 *	12,800 *	290
300	35.9	180.3	12,500 *	12,500 *	12,500 *	12,500 *	12,500 *	12,500 *	300
310	32.3	161.7	12,300 *	12,300 *	12,300 *	12,300 *	12,300 *	12,300 *	310




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

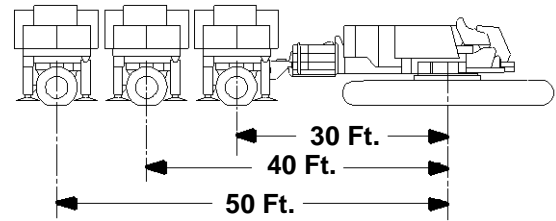

240 Ft. Boom

120 Ft. Jib, 15 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
100	80.3	357.0	25,900 *	25,900 *	25,900 *	25,900 *	25,900 *	25,900 *	100
105	79.5	355.6	25,400 *	25,400 *	25,400 *	25,400 *	25,400 *	25,400 *	105
110	78.7	354.2	24,900 *	24,900 *	24,900 *	24,900 *	24,900 *	24,900 *	110
115	77.9	352.6	24,400 *	24,400 *	24,400 *	24,400 *	24,400 *	24,400 *	115
120	77.0	351.0	23,900 *	23,900 *	23,900 *	23,900 *	23,900 *	23,900 *	120
125	76.2	349.3	23,400 *	23,400 *	23,400 *	23,400 *	23,400 *	23,400 *	125
130	75.3	347.5	23,000 *	23,000 *	23,000 *	23,000 *	23,000 *	23,000 *	130
135	74.5	345.6	22,500 *	22,500 *	22,500 *	22,500 *	22,500 *	22,500 *	135
140	73.6	343.7	22,100 *	22,100 *	22,100 *	22,100 *	22,100 *	22,100 *	140
145	72.8	341.6	21,700 *	21,700 *	21,700 *	21,700 *	21,700 *	21,700 *	145
150	71.9	339.5	21,300 *	21,300 *	21,300 *	21,300 *	21,300 *	21,300 *	150
160	70.1	334.9	20,500 *	20,500 *	20,500 *	20,500 *	20,500 *	20,500 *	160
170	68.4	330.0	19,700 *	19,700 *	19,700 *	19,700 *	19,700 *	19,700 *	170
180	66.6	324.7	19,000 *	19,000 *	19,000 *	19,000 *	19,000 *	19,000 *	180
190	64.7	319.0	18,300 *	18,300 *	18,300 *	18,300 *	18,300 *	18,300 *	190
200	62.8	312.8	17,700 *	17,700 *	17,700 *	17,700 *	17,700 *	17,700 *	200
210	60.9	306.1	17,100 *	17,100 *	17,100 *	17,100 *	17,100 *	17,100 *	210
220	59.0	299.0	16,500 *	16,500 *	16,500 *	16,500 *	16,500 *	16,500 *	220
230	57.0	291.3	16,000 *	16,000 *	16,000 *	16,000 *	16,000 *	16,000 *	230
240	54.9	283.1	15,500 *	15,500 *	15,500 *	15,500 *	15,500 *	15,500 *	240
250	52.8	274.2	15,000 *	15,000 *	15,000 *	15,000 *	15,000 *	15,000 *	250
260	50.5	264.6	14,500 *	14,500 *	14,500 *	14,500 *	14,500 *	14,500 *	260
270	48.2	254.2	14,100 *	14,100 *	14,100 *	14,100 *	14,100 *	14,100 *	270
280	45.8	242.9	13,700 *	13,700 *	13,700 *	13,700 *	13,700 *	13,700 *	280
290	43.3	230.7	13,300 *	13,300 *	13,300 *	13,300 *	13,300 *	13,300 *	290
300	40.6	217.1	13,000 *	13,000 *	13,000 *	13,000 *	13,000 *	13,000 *	300
310	37.8	202.2	12,700 *	12,700 *	12,700 *	12,700 *	12,700 *	12,700 *	310
320	34.6	185.4	12,400 *	12,400 *	12,400 *	12,400 *	12,400 *	12,400 *	320
330	31.2	166.1	12,200 *	12,200 *	12,200 *	12,200 *	12,200 *	12,200 *	330

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

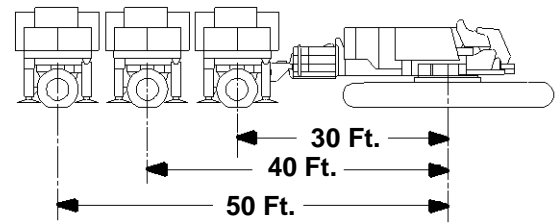

260 Ft. Boom

120 Ft. Jib, 15 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
100	80.9	377.6	26,200 *	26,200 *	26,200 *	26,200 *	26,200 *	26,200 *	100
105	80.1	376.3	25,700 *	25,700 *	25,700 *	25,700 *	25,700 *	25,700 *	105
110	79.3	374.9	25,200 *	25,200 *	25,200 *	25,200 *	25,200 *	25,200 *	110
115	78.5	373.5	24,700 *	24,700 *	24,700 *	24,700 *	24,700 *	24,700 *	115
120	77.7	371.9	24,300 *	24,300 *	24,300 *	24,300 *	24,300 *	24,300 *	120
125	76.9	370.3	23,800 *	23,800 *	23,800 *	23,800 *	23,800 *	23,800 *	125
130	76.1	368.6	23,400 *	23,400 *	23,400 *	23,400 *	23,400 *	23,400 *	130
135	75.3	366.9	22,900 *	22,900 *	22,900 *	22,900 *	22,900 *	22,900 *	135
140	74.5	365.0	22,500 *	22,500 *	22,500 *	22,500 *	22,500 *	22,500 *	140
145	73.7	363.1	22,100 *	22,100 *	22,100 *	22,100 *	22,100 *	22,100 *	145
150	72.9	361.1	21,700 *	21,700 *	21,700 *	21,700 *	21,700 *	21,700 *	150
160	71.3	356.8	20,900 *	20,900 *	20,900 *	20,900 *	20,900 *	20,900 *	160
170	69.6	352.2	20,200 *	20,200 *	20,200 *	20,200 *	20,200 *	20,200 *	170
180	67.9	347.3	19,500 *	19,500 *	19,500 *	19,500 *	19,500 *	19,500 *	180
190	66.2	341.9	18,900 *	18,900 *	18,900 *	18,900 *	18,900 *	18,900 *	190
200	64.5	336.2	18,200 *	18,200 *	18,200 *	18,200 *	18,200 *	18,200 *	200
210	62.7	330.0	17,600 *	17,600 *	17,600 *	17,600 *	17,600 *	17,600 *	210
220	60.9	323.4	17,100 *	17,100 *	17,100 *	17,100 *	17,100 *	17,100 *	220
230	59.0	316.4	16,500 *	16,500 *	16,500 *	16,500 *	16,500 *	16,500 *	230
240	57.1	308.8	16,000 *	16,000 *	16,000 *	16,000 *	16,000 *	16,000 *	240
250	55.2	300.7	15,500 *	15,500 *	15,500 *	15,500 *	15,500 *	15,500 *	250
260	53.2	292.0	15,100 *	15,100 *	15,100 *	15,100 *	15,100 *	15,100 *	260
270	51.1	282.7	14,600 *	14,600 *	14,600 *	14,600 *	14,600 *	14,600 *	270
280	49.0	272.6	14,200 *	14,200 *	14,200 *	14,200 *	14,200 *	14,200 *	280
290	46.7	261.8	13,900 *	13,900 *	13,900 *	13,900 *	13,900 *	13,900 *	290
300	44.4	250.1	13,500 *	13,500 *	13,500 *	13,500 *	13,500 *	13,500 *	300
310	42.0	237.3	13,200 *	13,200 *	13,200 *	13,200 *	13,200 *	13,200 *	310
320	39.4	223.2	12,900 *	12,900 *	12,900 *	12,900 *	12,900 *	12,900 *	320
330	36.6	207.7	10,800 *	10,800 *	10,800 *	10,800 *	10,800 *	10,800 *	330
340	33.5	190.3	8,400 *	8,400 *	8,400 *	8,400 *	8,400 *	8,400 *	340




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

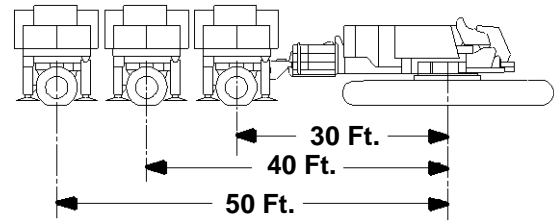

280 Ft. Boom

120 Ft. Jib, 15 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
105	80.8	396.6	25,600 *	25,600 *	25,600 *	25,600 *	25,600 *	25,600 *	105
110	80.1	395.3	25,200 *	25,200 *	25,200 *	25,200 *	25,200 *	25,200 *	110
115	79.3	393.9	24,700 *	24,700 *	24,700 *	24,700 *	24,700 *	24,700 *	115
120	78.6	392.4	24,300 *	24,300 *	24,300 *	24,300 *	24,300 *	24,300 *	120
125	77.8	390.9	23,900 *	23,900 *	23,900 *	23,900 *	23,900 *	23,900 *	125
130	77.1	389.3	23,500 *	23,500 *	23,500 *	23,500 *	23,500 *	23,500 *	130
135	76.3	387.6	23,100 *	23,100 *	23,100 *	23,100 *	23,100 *	23,100 *	135
140	75.6	385.9	22,700 *	22,700 *	22,700 *	22,700 *	22,700 *	22,700 *	140
145	74.8	384.1	22,300 *	22,300 *	22,300 *	22,300 *	22,300 *	22,300 *	145
150	74.0	382.2	21,900 *	21,900 *	21,900 *	21,900 *	21,900 *	21,900 *	150
160	72.5	378.2	21,200 *	21,200 *	21,200 *	21,200 *	21,200 *	21,200 *	160
170	70.9	373.8	20,500 *	20,500 *	20,500 *	20,500 *	20,500 *	20,500 *	170
180	69.3	369.2	19,800 *	19,800 *	19,800 *	19,800 *	19,800 *	19,800 *	180
190	67.7	364.1	19,200 *	19,200 *	19,200 *	19,200 *	19,200 *	19,200 *	190
200	66.1	358.8	18,600 *	18,600 *	18,600 *	18,600 *	18,600 *	18,600 *	200
210	64.4	353.0	18,000 *	18,000 *	18,000 *	18,000 *	18,000 *	18,000 *	210
220	62.8	346.9	17,400 *	17,400 *	17,400 *	17,400 *	17,400 *	17,400 *	220
230	61.0	340.3	16,900 *	16,900 *	16,900 *	16,900 *	16,900 *	16,900 *	230
240	59.3	333.3	16,400 *	16,400 *	16,400 *	16,400 *	16,400 *	16,400 *	240
250	57.5	325.9	15,900 *	15,900 *	15,900 *	15,900 *	15,900 *	15,900 *	250
260	55.6	317.9	15,500 *	15,500 *	15,500 *	15,500 *	15,500 *	15,500 *	260
270	53.8	309.4	15,100 *	15,100 *	15,100 *	15,100 *	15,100 *	15,100 *	270
280	51.8	300.2	14,700 *	14,700 *	14,700 *	14,700 *	14,700 *	14,700 *	280
290	49.8	290.5	14,300 *	14,300 *	14,300 *	14,300 *	14,300 *	14,300 *	290
300	47.7	280.0	13,900 *	13,900 *	13,900 *	13,900 *	13,900 *	13,900 *	300
310	45.6	268.7	13,600 *	13,600 *	13,600 *	13,600 *	13,600 *	13,600 *	310
320	43.3	256.4	13,300 *	13,300 *	13,300 *	13,300 *	13,300 *	13,300 *	320
330	40.9	243.1	13,000 *	13,000 *	13,000 *	13,000 *	13,000 *	13,000 *	330
340	38.4	228.6	12,700 *	12,700 *	12,700 *	12,700 *	12,700 *	12,700 *	340
350	35.6	212.5	12,500 *	12,500 *	12,500 *	12,500 *	12,500 *	12,500 *	350
360	32.7	194.4	12,300 *	12,300 *	12,300 *	12,300 *	12,300 *	12,300 *	360

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

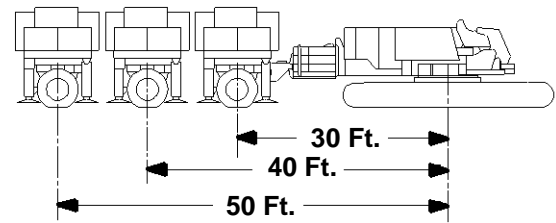

300 Ft. Boom
120 Ft. Jib, 15 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
110	80.6	415.9	25,400 *	25,400 *	25,400 *	25,400 *	25,400 *	25,400 *	110
115	79.9	414.5	25,000 *	25,000 *	25,000 *	25,000 *	25,000 *	25,000 *	115
120	79.2	413.2	24,600 *	24,600 *	24,600 *	24,600 *	24,600 *	24,600 *	120
125	78.4	411.7	24,200 *	24,200 *	24,200 *	24,200 *	24,200 *	24,200 *	125
130	77.7	410.2	23,800 *	23,800 *	23,800 *	23,800 *	23,800 *	23,800 *	130
135	77.0	408.6	23,400 *	23,400 *	23,400 *	23,400 *	23,400 *	23,400 *	135
140	76.3	407.0	23,000 *	23,000 *	23,000 *	23,000 *	23,000 *	23,000 *	140
145	75.6	405.3	22,600 *	22,600 *	22,600 *	22,600 *	22,600 *	22,600 *	145
150	74.8	403.5	22,300 *	22,300 *	22,300 *	22,300 *	22,300 *	22,300 *	150
160	73.4	399.7	21,600 *	21,600 *	21,600 *	21,600 *	21,600 *	21,600 *	160
170	71.9	395.6	20,900 *	20,900 *	20,900 *	20,900 *	20,900 *	20,900 *	170
180	70.4	391.2	20,200 *	20,200 *	20,200 *	20,200 *	20,200 *	20,200 *	180
190	68.9	386.5	19,600 *	19,600 *	19,600 *	19,600 *	19,600 *	19,600 *	190
200	67.4	381.4	19,000 *	19,000 *	19,000 *	19,000 *	19,000 *	19,000 *	200
210	65.8	376.0	18,500 *	18,500 *	18,500 *	18,500 *	18,500 *	18,500 *	210
220	64.2	370.3	17,900 *	17,900 *	17,900 *	17,900 *	17,900 *	17,900 *	220
230	62.6	364.1	17,400 *	17,400 *	17,400 *	17,400 *	17,400 *	17,400 *	230
240	61.0	357.6	16,900 *	16,900 *	16,900 *	16,900 *	16,900 *	16,900 *	240
250	59.3	350.7	16,400 *	16,400 *	16,400 *	16,400 *	16,400 *	16,400 *	250
260	57.6	343.3	16,000 *	16,000 *	16,000 *	16,000 *	16,000 *	16,000 *	260
270	55.9	335.4	15,500 *	15,500 *	15,500 *	15,500 *	15,500 *	15,500 *	270
280	54.1	327.1	15,100 *	15,100 *	15,100 *	15,100 *	15,100 *	15,100 *	280
290	52.3	318.1	14,800 *	14,800 *	14,800 *	14,800 *	14,800 *	14,800 *	290
300	50.4	308.6	14,400 *	14,400 *	14,400 *	14,400 *	14,400 *	14,400 *	300
310	48.4	298.4	14,000 *	14,000 *	14,000 *	14,000 *	14,000 *	14,000 *	310
320	46.4	287.5	13,700 *	13,700 *	13,700 *	13,700 *	13,700 *	13,700 *	320
330	44.3	275.8	13,400 *	13,400 *	13,400 *	13,400 *	13,400 *	13,400 *	330
340	42.1	263.1	13,100 *	13,100 *	13,100 *	13,100 *	13,100 *	13,100 *	340
350	39.7	249.4	12,900 *	12,900 *	12,900 *	12,900 *	12,900 *	12,900 *	350
360	37.3	234.3	12,600 *	12,600 *	12,600 *	12,600 *	12,600 *	12,600 *	360
370	34.6	217.7	12,000 *	12,400 *	12,400 *	12,400 *	12,400 *	12,400 *	370




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

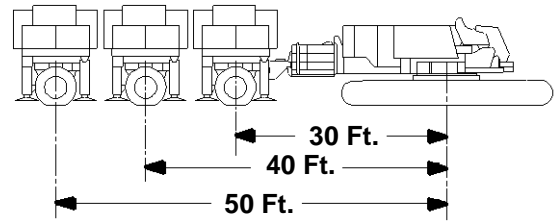

320 Ft. Boom
120 Ft. Jib, 15 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position	40 Ft. Position			50 Ft. Position		Jib Oper. Rad. Feet
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds		
110	81.0	436.4	25,600 *	25,600 *	25,600 *	25,600 *	25,600 *	25,600 *	110
115	80.3	435.1	25,200 *	25,200 *	25,200 *	25,200 *	25,200 *	25,200 *	115
120	79.7	433.8	24,800 *	24,800 *	24,800 *	24,800 *	24,800 *	24,800 *	120
125	79.0	432.5	24,400 *	24,400 *	24,400 *	24,400 *	24,400 *	24,400 *	125
130	78.3	431.0	24,100 *	24,100 *	24,100 *	24,100 *	24,100 *	24,100 *	130
135	77.6	429.5	23,700 *	23,700 *	23,700 *	23,700 *	23,700 *	23,700 *	135
140	76.9	428.0	23,300 *	23,300 *	23,300 *	23,300 *	23,300 *	23,300 *	140
145	76.3	426.3	23,000 *	23,000 *	23,000 *	23,000 *	23,000 *	23,000 *	145
150	75.6	424.6	22,600 *	22,600 *	22,600 *	22,600 *	22,600 *	22,600 *	150
160	74.2	421.0	21,900 *	21,900 *	21,900 *	21,900 *	21,900 *	21,900 *	160
170	72.8	417.1	21,200 *	21,200 *	21,200 *	21,200 *	21,200 *	21,200 *	170
180	71.4	413.0	20,600 *	20,600 *	20,600 *	20,600 *	20,600 *	20,600 *	180
190	69.9	408.5	20,000 *	20,000 *	20,000 *	20,000 *	20,000 *	20,000 *	190
200	68.5	403.7	19,400 *	19,400 *	19,400 *	19,400 *	19,400 *	19,400 *	200
210	67.0	398.7	18,900 *	18,900 *	18,900 *	18,900 *	18,900 *	18,900 *	210
220	65.5	393.3	18,300 *	18,300 *	18,300 *	18,300 *	18,300 *	18,300 *	220
230	64.0	387.5	17,800 *	17,800 *	17,800 *	17,800 *	17,800 *	17,800 *	230
240	62.5	381.4	17,300 *	17,300 *	17,300 *	17,300 *	17,300 *	17,300 *	240
250	60.9	374.9	16,900 *	16,900 *	16,900 *	16,900 *	16,900 *	16,900 *	250
260	59.4	368.0	16,400 *	16,400 *	16,400 *	16,400 *	16,400 *	16,400 *	260
270	57.7	360.7	16,000 *	16,000 *	16,000 *	16,000 *	16,000 *	16,000 *	270
280	56.1	353.0	15,600 *	15,600 *	15,600 *	15,600 *	15,600 *	15,600 *	280
290	54.4	344.7	15,200 *	15,200 *	15,200 *	15,200 *	15,200 *	15,200 *	290
300	52.7	336.0	14,800 *	14,800 *	14,800 *	14,800 *	14,800 *	14,800 *	300
310	50.9	326.7	14,500 *	14,500 *	14,500 *	14,500 *	14,500 *	14,500 *	310
320	49.0	316.8	14,100 *	14,100 *	14,100 *	14,100 *	14,100 *	14,100 *	320
330	47.1	306.2	13,800 *	13,800 *	13,800 *	13,800 *	13,800 *	13,800 *	330
340	45.2	294.9	13,500 *	13,500 *	13,500 *	13,500 *	13,500 *	13,500 *	340
350	43.1	282.7	13,200 *	13,200 *	13,200 *	13,200 *	13,200 *	13,200 *	350
360	40.9	269.6	13,000 *	13,000 *	13,000 *	13,000 *	13,000 *	13,000 *	360
370	38.7	255.4	12,700 *	12,700 *	12,700 *	12,700 *	12,700 *	12,700 *	370
380	36.3	239.9	12,500 *	12,500 *	12,500 *	12,500 *	12,500 *	12,500 *	380
390	33.7	222.8	12,300 *	11,100 *	12,300 *	12,300 *	12,300 *	12,300 *	390

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

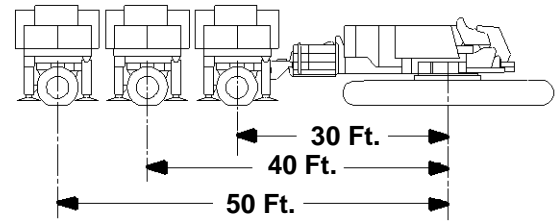

340 Ft. Boom
120 Ft. Jib, 15 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
115	80.8	455.7	25,400 *	25,400 *	25,400 *	25,400 *	115
120	80.1	454.4	25,000 *	25,000 *	25,000 *	25,000 *	120
125	79.5	453.1	24,600 *	24,600 *	24,600 *	24,600 *	125
130	78.8	451.8	24,300 *	24,300 *	24,300 *	24,300 *	130
135	78.2	450.3	23,900 *	23,900 *	23,900 *	23,900 *	135
140	77.5	448.8	23,600 *	23,600 *	23,600 *	23,600 *	140
145	76.9	447.3	23,200 *	23,200 *	23,200 *	23,200 *	145
150	76.2	445.7	22,900 *	22,900 *	22,900 *	22,900 *	150
160	74.9	442.2	22,200 *	22,200 *	22,200 *	22,200 *	160
170	73.6	438.6	21,600 *	21,600 *	21,600 *	21,600 *	170
180	72.2	434.6	21,000 *	21,000 *	21,000 *	21,000 *	180
190	70.9	430.4	20,400 *	20,400 *	20,400 *	20,400 *	190
200	69.5	425.9	19,800 *	19,800 *	19,800 *	19,800 *	200
210	68.1	421.0	19,300 *	19,300 *	19,300 *	19,300 *	210
220	66.7	415.9	18,800 *	18,800 *	18,800 *	18,800 *	220
230	65.3	410.5	18,300 *	18,300 *	18,300 *	18,300 *	230
240	63.8	404.8	17,800 *	17,800 *	17,800 *	17,800 *	240
250	62.4	398.7	17,300 *	17,300 *	17,300 *	17,300 *	250
260	60.9	392.2	16,900 *	16,900 *	16,900 *	16,900 *	260
270	59.4	385.4	16,400 *	16,400 *	16,400 *	16,400 *	270
280	57.8	378.1	16,000 *	16,000 *	16,000 *	16,000 *	280
290	56.3	370.5	15,600 *	15,600 *	15,600 *	15,600 *	290
300	54.7	362.4	15,200 *	15,200 *	15,200 *	15,200 *	300
310	53.0	353.8	14,900 *	14,900 *	14,900 *	14,900 *	310
320	51.3	344.7	14,500 *	14,500 *	14,500 *	14,500 *	320
330	49.6	335.0	14,200 *	14,200 *	14,200 *	14,200 *	330
340	47.8	324.7	13,900 *	13,900 *	13,900 *	13,900 *	340
350	45.9	313.8	13,600 *	13,600 *	13,600 *	13,600 *	350
360	44.0	302.1	13,300 *	13,300 *	13,300 *	13,300 *	360
370	42.0	289.5	13,100 *	13,100 *	13,100 *	13,100 *	370
380	39.9	276.0	11,900 *	12,900 *	12,900 *	12,900 *	380
390	37.7	261.3	10,100 *	12,600 *	12,600 *	12,600 *	390
400	35.3	245.4	8,300 *	12,400 *	12,400 *	12,400 *	400
410	32.8	227.8	6,600 *	12,300 *	12,300 *	12,300 *	410




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

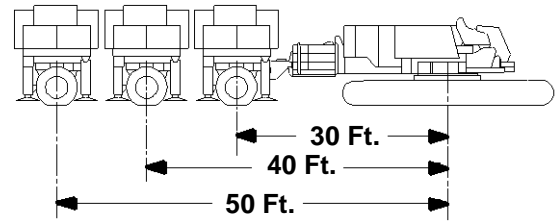

360 Ft. Boom 120 Ft. Jib, 15 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	50 Ft. Position
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds
120	80.5	475.0	25,100 *
125	79.9	473.7	24,700 *
130	79.3	472.4	24,400 *
135	78.7	471.1	24,100 *
140	78.1	469.6	23,700 *
145	77.4	468.2	23,400 *
150	76.8	466.6	23,100 *
160	75.6	463.4	22,500 *
170	74.3	459.8	21,900 *
180	73.0	456.1	21,300 *
190	71.7	452.0	20,700 *
200	70.4	447.8	20,100 *
210	69.1	443.2	19,600 *
220	67.8	438.3	19,100 *
230	66.4	433.2	18,600 *
240	65.1	427.8	18,100 *
250	63.7	422.0	17,700 *
260	62.3	415.9	17,200 *
270	60.9	409.5	16,800 *
280	59.4	402.7	16,400 *
290	57.9	395.5	16,000 *
300	56.4	388.0	15,600 *
310	54.9	380.0	15,300 *
320	53.3	371.5	14,900 *
330	51.7	362.6	14,600 *
340	50.1	353.2	14,300 *
350	48.4	343.1	14,000 *
360	46.6	332.5	13,700 *
370	44.8	321.2	13,400 *
380	42.9	309.1	13,200 *
390	41.0	296.1	13,000 *
400	38.9	282.2	12,700 *
410	36.8	267.1	12,600 *
420	34.5	250.7	12,400 *
430	32.0	232.6	12,200 *

380 Ft. Boom 120 Ft. Jib, 15 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	50 Ft. Position
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds
120	80.9	495.5	25,200 *
125	80.3	494.3	24,800 *
130	79.8	493.1	24,500 *
135	79.2	491.8	24,200 *
140	78.6	490.4	23,900 *
145	78.0	489.0	23,600 *
150	77.4	487.5	23,300 *
160	76.2	484.4	22,700 *
170	75.0	481.0	22,100 *
180	73.7	477.4	21,500 *
190	72.5	473.6	21,000 *
200	71.3	469.5	20,400 *
210	70.0	465.1	19,900 *
220	68.7	460.5	19,400 *
230	67.5	455.6	18,900 *
240	66.2	450.5	18,500 *
250	64.9	445.0	18,000 *
260	63.5	439.3	17,600 *
270	62.2	433.2	17,200 *
280	60.8	426.8	16,800 *
290	59.4	420.0	16,400 *
300	58.0	412.9	16,000 *
310	56.6	405.5	15,600 *
320	55.1	397.6	15,300 *
330	53.6	389.3	15,000 *
340	52.1	380.5	14,600 *
350	50.5	371.2	14,300 *
360	48.9	361.4	14,100 *
370	47.3	351.1	13,800 *
380	45.6	340.1	13,500 *
390	43.8	328.4	13,300 *
400	42.0	315.9	13,100 *
410	40.0	302.6	12,800 *
420	38.0	288.3	12,700 *
430	35.9	272.8	12,500 *
440	33.7	255.9	12,300 *

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

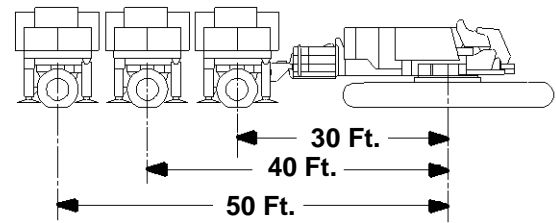

200 Ft. Boom
120 Ft. Jib, 30 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
115	80.7	303.5	18,000 *	18,000 *	18,000 *	18,000 *	18,000 *	18,000 *	115
120	79.7	301.6	17,500 *	17,500 *	17,500 *	17,500 *	17,500 *	17,500 *	120
125	78.7	299.6	17,100 *	17,100 *	17,100 *	17,100 *	17,100 *	17,100 *	125
130	77.7	297.5	16,700 *	16,700 *	16,700 *	16,700 *	16,700 *	16,700 *	130
135	76.7	295.3	16,300 *	16,300 *	16,300 *	16,300 *	16,300 *	16,300 *	135
140	75.7	292.9	15,900 *	15,900 *	15,900 *	15,900 *	15,900 *	15,900 *	140
145	74.7	290.5	15,500 *	15,500 *	15,500 *	15,500 *	15,500 *	15,500 *	145
150	73.7	288.0	15,100 *	15,100 *	15,100 *	15,100 *	15,100 *	15,100 *	150
160	71.6	282.6	14,500 *	14,500 *	14,500 *	14,500 *	14,500 *	14,500 *	160
170	69.5	276.7	13,900 *	13,900 *	13,900 *	13,900 *	13,900 *	13,900 *	170
180	67.3	270.3	13,300 *	13,300 *	13,300 *	13,300 *	13,300 *	13,300 *	180
190	65.1	263.3	12,800 *	12,800 *	12,800 *	12,800 *	12,800 *	12,800 *	190
200	62.8	255.8	12,300 *	12,300 *	12,300 *	12,300 *	12,300 *	12,300 *	200
210	60.4	247.5	11,800 *	11,800 *	11,800 *	11,800 *	11,800 *	11,800 *	210
220	57.9	238.6	11,400 *	11,400 *	11,400 *	11,400 *	11,400 *	11,400 *	220
230	55.4	228.8	11,100 *	11,100 *	11,100 *	11,100 *	11,100 *	11,100 *	230
240	52.7	218.1	10,700 *	10,700 *	10,700 *	10,700 *	10,700 *	10,700 *	240
250	49.9	206.3	10,400 *	10,400 *	10,400 *	10,400 *	10,400 *	10,400 *	250
260	46.8	193.1	10,100 *	10,100 *	10,100 *	10,100 *	10,100 *	10,100 *	260




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

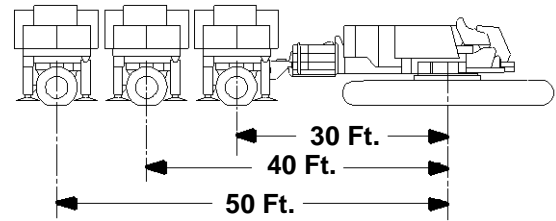

220 Ft. Boom

120 Ft. Jib, 30 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
120	80.4	322.6	17,800 *	17,800 *	17,800 *	17,800 *	17,800 *	17,800 *	120
125	79.5	320.7	17,400 *	17,400 *	17,400 *	17,400 *	17,400 *	17,400 *	125
130	78.5	318.7	17,000 *	17,000 *	17,000 *	17,000 *	17,000 *	17,000 *	130
135	77.6	316.7	16,600 *	16,600 *	16,600 *	16,600 *	16,600 *	16,600 *	135
140	76.7	314.5	16,200 *	16,200 *	16,200 *	16,200 *	16,200 *	16,200 *	140
145	75.7	312.3	15,900 *	15,900 *	15,900 *	15,900 *	15,900 *	15,900 *	145
150	74.8	310.0	15,500 *	15,500 *	15,500 *	15,500 *	15,500 *	15,500 *	150
160	72.8	305.0	14,900 *	14,900 *	14,900 *	14,900 *	14,900 *	14,900 *	160
170	70.9	299.5	14,300 *	14,300 *	14,300 *	14,300 *	14,300 *	14,300 *	170
180	68.9	293.6	13,700 *	13,700 *	13,700 *	13,700 *	13,700 *	13,700 *	180
190	66.8	287.3	13,200 *	13,200 *	13,200 *	13,200 *	13,200 *	13,200 *	190
200	64.7	280.4	12,700 *	12,700 *	12,700 *	12,700 *	12,700 *	12,700 *	200
210	62.6	272.9	12,300 *	12,300 *	12,300 *	12,300 *	12,300 *	12,300 *	210
220	60.4	264.8	11,800 *	11,800 *	11,800 *	11,800 *	11,800 *	11,800 *	220
230	58.1	256.1	11,500 *	11,500 *	11,500 *	11,500 *	11,500 *	11,500 *	230
240	55.7	246.6	11,100 *	11,100 *	11,100 *	11,100 *	11,100 *	11,100 *	240
250	53.2	236.3	10,800 *	10,800 *	10,800 *	10,800 *	10,800 *	10,800 *	250
260	50.6	225.0	10,500 *	10,500 *	10,500 *	10,500 *	10,500 *	10,500 *	260
270	47.9	212.6	10,200 *	10,200 *	10,200 *	10,200 *	10,200 *	10,200 *	270
280	45.0	198.9	10,000 *	10,000 *	10,000 *	10,000 *	10,000 *	10,000 *	280

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

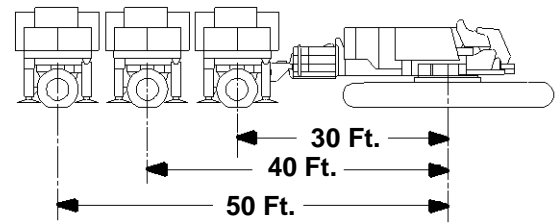

240 Ft. Boom

120 Ft. Jib, 30 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
120	81.0	343.4	18,100 *	18,100 *	18,100 *	18,100 *	18,100 *	18,100 *	120
125	80.1	341.7	17,700 *	17,700 *	17,700 *	17,700 *	17,700 *	17,700 *	125
130	79.2	339.9	17,300 *	17,300 *	17,300 *	17,300 *	17,300 *	17,300 *	130
135	78.4	337.9	16,900 *	16,900 *	16,900 *	16,900 *	16,900 *	16,900 *	135
140	77.5	335.9	16,600 *	16,600 *	16,600 *	16,600 *	16,600 *	16,600 *	140
145	76.6	333.8	16,200 *	16,200 *	16,200 *	16,200 *	16,200 *	16,200 *	145
150	75.7	331.6	15,900 *	15,900 *	15,900 *	15,900 *	15,900 *	15,900 *	150
160	73.9	327.0	15,200 *	15,200 *	15,200 *	15,200 *	15,200 *	15,200 *	160
170	72.1	321.9	14,600 *	14,600 *	14,600 *	14,600 *	14,600 *	14,600 *	170
180	70.2	316.5	14,100 *	14,100 *	14,100 *	14,100 *	14,100 *	14,100 *	180
190	68.3	310.6	13,600 *	13,600 *	13,600 *	13,600 *	13,600 *	13,600 *	190
200	66.4	304.2	13,100 *	13,100 *	13,100 *	13,100 *	13,100 *	13,100 *	200
210	64.4	297.4	12,600 *	12,600 *	12,600 *	12,600 *	12,600 *	12,600 *	210
220	62.4	290.0	12,200 *	12,200 *	12,200 *	12,200 *	12,200 *	12,200 *	220
230	60.4	282.1	11,800 *	11,800 *	11,800 *	11,800 *	11,800 *	11,800 *	230
240	58.2	273.6	11,500 *	11,500 *	11,500 *	11,500 *	11,500 *	11,500 *	240
250	56.0	264.4	11,100 *	11,100 *	11,100 *	11,100 *	11,100 *	11,100 *	250
260	53.7	254.4	10,800 *	10,800 *	10,800 *	10,800 *	10,800 *	10,800 *	260
270	51.3	243.5	10,500 *	10,500 *	10,500 *	10,500 *	10,500 *	10,500 *	270
280	48.8	231.7	10,300 *	10,300 *	10,300 *	10,300 *	10,300 *	10,300 *	280
290	46.1	218.8	10,000 *	10,000 *	10,000 *	10,000 *	10,000 *	10,000 *	290




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

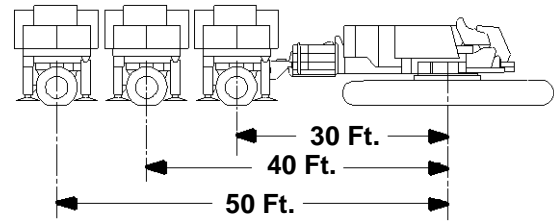

260 Ft. Boom
120 Ft. Jib, 30 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
125	80.7	362.6	18,000 *	18,000 *	18,000 *	18,000 *	18,000 *	18,000 *	125
130	79.8	360.9	17,600 *	17,600 *	17,600 *	17,600 *	17,600 *	17,600 *	130
135	79.0	359.0	17,200 *	17,200 *	17,200 *	17,200 *	17,200 *	17,200 *	135
140	78.2	357.2	16,900 *	16,900 *	16,900 *	16,900 *	16,900 *	16,900 *	140
145	77.4	355.2	16,500 *	16,500 *	16,500 *	16,500 *	16,500 *	16,500 *	145
150	76.5	353.1	16,200 *	16,200 *	16,200 *	16,200 *	16,200 *	16,200 *	150
160	74.9	348.8	15,600 *	15,600 *	15,600 *	15,600 *	15,600 *	15,600 *	160
170	73.1	344.1	15,000 *	15,000 *	15,000 *	15,000 *	15,000 *	15,000 *	170
180	71.4	339.0	14,400 *	14,400 *	14,400 *	14,400 *	14,400 *	14,400 *	180
190	69.7	333.5	13,900 *	13,900 *	13,900 *	13,900 *	13,900 *	13,900 *	190
200	67.9	327.6	13,500 *	13,500 *	13,500 *	13,500 *	13,500 *	13,500 *	200
210	66.1	321.3	13,000 *	13,000 *	13,000 *	13,000 *	13,000 *	13,000 *	210
220	64.2	314.5	12,600 *	12,600 *	12,600 *	12,600 *	12,600 *	12,600 *	220
230	62.3	307.2	12,200 *	12,200 *	12,200 *	12,200 *	12,200 *	12,200 *	230
240	60.3	299.4	11,900 *	11,900 *	11,900 *	11,900 *	11,900 *	11,900 *	240
250	58.3	291.0	11,500 *	11,500 *	11,500 *	11,500 *	11,500 *	11,500 *	250
260	56.2	282.0	11,200 *	11,200 *	11,200 *	11,200 *	11,200 *	11,200 *	260
270	54.1	272.4	10,900 *	10,900 *	10,900 *	10,900 *	10,900 *	10,900 *	270
280	51.9	261.9	10,600 *	10,600 *	10,600 *	10,600 *	10,600 *	10,600 *	280
290	49.5	250.6	10,100 *	10,100 *	10,100 *	10,100 *	10,100 *	10,100 *	290
300	47.1	238.3	8,200 *	8,200 *	8,200 *	8,200 *	8,200 *	8,200 *	300
310	44.5	224.8	6,300 *	6,300 *	6,300 *	6,300 *	6,300 *	6,300 *	310

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

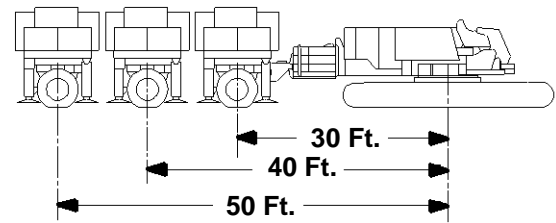

280 Ft. Boom
120 Ft. Jib, 30 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
125	81.0	383.9	19,700 *	19,700 *	19,700 *	19,700 *	19,700 *	19,700 *	125
130	80.2	382.3	19,400 *	19,400 *	19,400 *	19,400 *	19,400 *	19,400 *	130
135	79.4	380.6	19,100 *	19,100 *	19,100 *	19,100 *	19,100 *	19,100 *	135
140	78.7	378.8	18,800 *	18,800 *	18,800 *	18,800 *	18,800 *	18,800 *	140
145	77.9	376.9	18,500 *	18,500 *	18,500 *	18,500 *	18,500 *	18,500 *	145
150	77.1	375.0	18,200 *	18,200 *	18,200 *	18,200 *	18,200 *	18,200 *	150
160	75.5	370.9	17,700 *	17,700 *	17,700 *	17,700 *	17,700 *	17,700 *	160
170	73.9	366.5	17,200 *	17,200 *	17,200 *	17,200 *	17,200 *	17,200 *	170
180	72.3	361.7	16,700 *	16,700 *	16,700 *	16,700 *	16,700 *	16,700 *	180
190	70.7	356.6	16,300 *	16,300 *	16,300 *	16,300 *	16,300 *	16,300 *	190
200	69.0	351.1	15,900 *	15,900 *	15,900 *	15,900 *	15,900 *	15,900 *	200
210	67.3	345.2	15,400 *	15,400 *	15,400 *	15,400 *	15,400 *	15,400 *	210
220	65.6	338.9	15,000 *	15,000 *	15,000 *	15,000 *	15,000 *	15,000 *	220
230	63.8	332.2	14,700 *	14,700 *	14,700 *	14,700 *	14,700 *	14,700 *	230
240	62.0	325.0	14,300 *	14,300 *	14,300 *	14,300 *	14,300 *	14,300 *	240
250	60.2	317.4	14,000 *	14,000 *	14,000 *	14,000 *	14,000 *	14,000 *	250
260	58.3	309.2	13,700 *	13,700 *	13,700 *	13,700 *	13,700 *	13,700 *	260
270	56.3	300.4	13,500 *	13,500 *	13,500 *	13,500 *	13,500 *	13,500 *	270
280	54.3	291.0	13,200 *	13,200 *	13,200 *	13,200 *	13,200 *	13,200 *	280
290	52.3	280.9	13,000 *	13,000 *	13,000 *	13,000 *	13,000 *	13,000 *	290
300	50.1	270.0	12,700 *	12,700 *	12,700 *	12,700 *	12,700 *	12,700 *	300
310	47.8	258.2	12,500 *	12,500 *	12,500 *	12,500 *	12,500 *	12,500 *	310
320	45.5	245.4	12,400 *	12,400 *	12,400 *	12,400 *	12,400 *	12,400 *	320




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

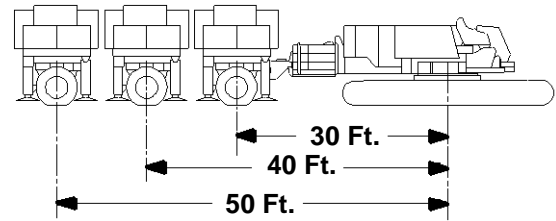

300 Ft. Boom
120 Ft. Jib, 30 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position		40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
130	80.7	403.1	19,500 *	19,500 *	19,500 *	19,500 *	19,500 *	19,500 *	130
135	80.0	401.4	19,200 *	19,200 *	19,200 *	19,200 *	19,200 *	19,200 *	135
140	79.2	399.8	19,000 *	19,000 *	19,000 *	19,000 *	19,000 *	19,000 *	140
145	78.5	398.0	18,700 *	18,700 *	18,700 *	18,700 *	18,700 *	18,700 *	145
150	77.8	396.2	18,400 *	18,400 *	18,400 *	18,400 *	18,400 *	18,400 *	150
160	76.3	392.3	17,900 *	17,900 *	17,900 *	17,900 *	17,900 *	17,900 *	160
170	74.8	388.1	17,500 *	17,500 *	17,500 *	17,500 *	17,500 *	17,500 *	170
180	73.2	383.7	17,000 *	17,000 *	17,000 *	17,000 *	17,000 *	17,000 *	180
190	71.7	378.8	16,600 *	16,600 *	16,600 *	16,600 *	16,600 *	16,600 *	190
200	70.1	373.7	16,100 *	16,100 *	16,100 *	16,100 *	16,100 *	16,100 *	200
210	68.5	368.2	15,700 *	15,700 *	15,700 *	15,700 *	15,700 *	15,700 *	210
220	66.9	362.3	15,400 *	15,400 *	15,400 *	15,400 *	15,400 *	15,400 *	220
230	65.3	356.0	15,000 *	15,000 *	15,000 *	15,000 *	15,000 *	15,000 *	230
240	63.6	349.4	14,700 *	14,700 *	14,700 *	14,700 *	14,700 *	14,700 *	240
250	61.9	342.2	14,300 *	14,300 *	14,300 *	14,300 *	14,300 *	14,300 *	250
260	60.2	334.7	14,000 *	14,000 *	14,000 *	14,000 *	14,000 *	14,000 *	260
270	58.4	326.6	13,800 *	13,800 *	13,800 *	13,800 *	13,800 *	13,800 *	270
280	56.5	318.0	13,500 *	13,500 *	13,500 *	13,500 *	13,500 *	13,500 *	280
290	54.6	308.8	13,200 *	13,200 *	13,200 *	13,200 *	13,200 *	13,200 *	290
300	52.7	299.0	13,000 *	13,000 *	13,000 *	13,000 *	13,000 *	13,000 *	300
310	50.7	288.4	12,800 *	12,800 *	12,800 *	12,800 *	12,800 *	12,800 *	310
320	48.6	277.1	12,600 *	12,600 *	12,600 *	12,600 *	12,600 *	12,600 *	320
330	46.4	264.9	12,400 *	12,400 *	12,400 *	12,400 *	12,400 *	12,400 *	330
340	44.1	251.6	12,300 *	12,300 *	12,300 *	12,300 *	12,300 *	12,300 *	340

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

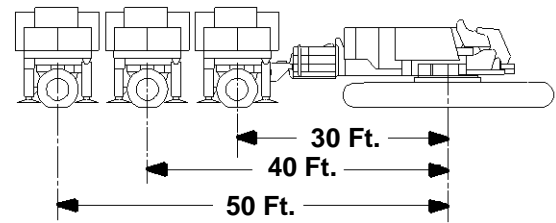

320 Ft. Boom
120 Ft. Jib, 30 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	30 Ft. Position	40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
135	80.5	422.2	19,400 *	19,400 *	19,400 *	19,400 *	19,400 *	135
140	79.8	420.7	19,100 *	19,100 *	19,100 *	19,100 *	19,100 *	140
145	79.1	419.0	18,900 *	18,900 *	18,900 *	18,900 *	18,900 *	145
150	78.4	417.3	18,600 *	18,600 *	18,600 *	18,600 *	18,600 *	150
160	76.9	413.6	18,100 *	18,100 *	18,100 *	18,100 *	18,100 *	160
170	75.5	409.6	17,700 *	17,700 *	17,700 *	17,700 *	17,700 *	170
180	74.1	405.4	17,200 *	17,200 *	17,200 *	17,200 *	17,200 *	180
190	72.6	400.8	16,800 *	16,800 *	16,800 *	16,800 *	16,800 *	190
200	71.1	396.0	16,400 *	16,400 *	16,400 *	16,400 *	16,400 *	200
210	69.6	390.8	16,000 *	16,000 *	16,000 *	16,000 *	16,000 *	210
220	68.1	385.3	15,600 *	15,600 *	15,600 *	15,600 *	15,600 *	220
230	66.6	379.4	15,300 *	15,300 *	15,300 *	15,300 *	15,300 *	230
240	65.0	373.2	14,900 *	14,900 *	14,900 *	14,900 *	14,900 *	240
250	63.4	366.5	14,600 *	14,600 *	14,600 *	14,600 *	14,600 *	250
260	61.8	359.5	14,300 *	14,300 *	14,300 *	14,300 *	14,300 *	260
270	60.2	352.0	14,000 *	14,000 *	14,000 *	14,000 *	14,000 *	270
280	58.5	344.0	13,800 *	13,800 *	13,800 *	13,800 *	13,800 *	280
290	56.7	335.6	13,500 *	13,500 *	13,500 *	13,500 *	13,500 *	290
300	54.9	326.6	13,300 *	13,300 *	13,300 *	13,300 *	13,300 *	300
310	53.1	317.0	13,000 *	13,000 *	13,000 *	13,000 *	13,000 *	310
320	51.2	306.8	12,800 *	12,800 *	12,800 *	12,800 *	12,800 *	320
330	49.2	295.8	12,700 *	12,700 *	12,700 *	12,700 *	12,700 *	330
340	47.2	284.1	12,500 *	12,500 *	12,500 *	12,500 *	12,500 *	340
350	45.0	271.4	12,300 *	12,300 *	12,300 *	12,300 *	12,300 *	350




Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

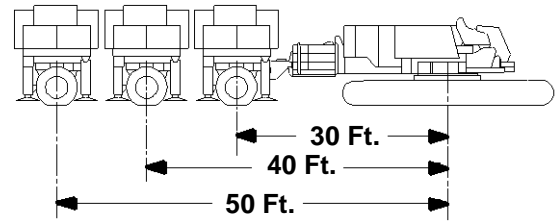

340 Ft. Boom
120 Ft. Jib, 30 Degree Offset


Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	40 Ft. Position		50 Ft. Position		Jib Oper. Rad. Feet
			240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	240,000 Lb. Wheeled Counterweight Jib Capacity Pounds	462,000 Lb. Wheeled Counterweight Jib Capacity Pounds	
135	80.9	443.0	19,500 *	19,500 *	19,500 *	19,500 *	135
140	80.2	441.5	19,300 *	19,300 *	19,300 *	19,300 *	140
145	79.6	439.9	19,000 *	19,000 *	19,000 *	19,000 *	145
150	78.9	438.2	18,800 *	18,800 *	18,800 *	18,800 *	150
160	77.6	434.7	18,300 *	18,300 *	18,300 *	18,300 *	160
170	76.2	431.0	17,900 *	17,900 *	17,900 *	17,900 *	170
180	74.8	427.0	17,400 *	17,400 *	17,400 *	17,400 *	180
190	73.5	422.6	17,000 *	17,000 *	17,000 *	17,000 *	190
200	72.1	418.0	16,600 *	16,600 *	16,600 *	16,600 *	200
210	70.6	413.1	16,300 *	16,300 *	16,300 *	16,300 *	210
220	69.2	407.9	15,900 *	15,900 *	15,900 *	15,900 *	220
230	67.8	402.4	15,500 *	15,500 *	15,500 *	15,500 *	230
240	66.3	396.5	15,200 *	15,200 *	15,200 *	15,200 *	240
250	64.8	390.3	14,900 *	14,900 *	14,900 *	14,900 *	250
260	63.3	383.7	14,600 *	14,600 *	14,600 *	14,600 *	260
270	61.7	376.7	14,300 *	14,300 *	14,300 *	14,300 *	270
280	60.1	369.3	14,000 *	14,000 *	14,000 *	14,000 *	280
290	58.5	361.4	13,800 *	13,800 *	13,800 *	13,800 *	290
300	56.9	353.1	13,500 *	13,500 *	13,500 *	13,500 *	300
310	55.2	344.3	13,300 *	13,300 *	13,300 *	13,300 *	310
320	53.5	334.9	13,100 *	13,100 *	13,100 *	13,100 *	320
330	51.7	325.0	12,900 *	12,900 *	12,900 *	12,900 *	330
340	49.8	314.4	12,700 *	12,700 *	12,700 *	12,700 *	340
350	47.9	303.0	12,600 *	12,600 *	12,600 *	12,600 *	350
360	45.9	290.8	12,400 *	12,400 *	12,400 *	12,400 *	360
370	43.8	277.8	12,300 *	12,300 *	12,300 *	12,300 *	370

Liftcrane Jib Capacities

Jib No. 132 With 20 Ft. Strut On
 Boom No. 79-44 with 130 Ft. Mast No. 44
 169,200 Lb. Crane Counterweight
 60,000 Lb. Carbody Counterweight
 240,000 Lb. and 462,000 Lb. Wheeled Counterweight
 360 Degree Rating

Meets
ANSI B30.5
Requirements

MAX-ER 2000 On 2250

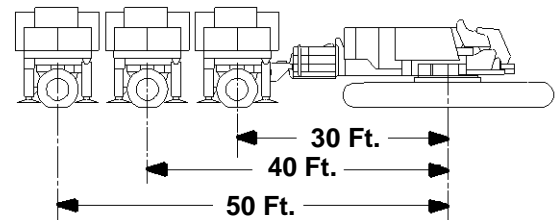

360 Ft. Boom 120 Ft. Jib, 30 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	50 Ft. Position
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds
140	80.7	462.2	19,400 *
145	80.0	460.7	19,100 *
150	79.4	459.1	18,900 *
160	78.1	455.8	18,500 *
170	76.8	452.2	18,000 *
180	75.5	448.4	17,600 *
190	74.2	444.3	17,200 *
200	72.9	439.9	16,900 *
210	71.5	435.3	16,500 *
220	70.2	430.3	16,100 *
230	68.8	425.1	15,800 *
240	67.4	419.5	15,500 *
250	66.0	413.7	15,100 *
260	64.6	407.4	14,800 *
270	63.1	400.9	14,600 *
280	61.6	393.9	14,300 *
290	60.1	386.6	14,000 *
300	58.6	378.9	13,800 *
310	57.0	370.7	13,500 *
320	55.4	362.0	13,300 *
330	53.8	352.8	13,100 *
340	52.1	343.1	12,900 *
350	50.3	332.8	12,800 *
360	48.5	321.8	12,600 *
370	46.6	310.0	12,500 *
380	44.7	297.5	12,300 *

380 Ft. Boom 120 Ft. Jib, 30 Degree Offset

Jib Oper. Rad. Feet	Boom Ang. Deg.	Jib Point Elev. Feet	50 Ft. Position
			462,000 Lb. Wheeled Counterweight Jib Capacity Pounds
145	80.5	481.4	19,200 *
150	79.8	479.9	19,000 *
160	78.6	476.7	18,600 *
170	77.4	473.3	18,200 *
180	76.1	469.7	17,800 *
190	74.9	465.7	17,400 *
200	73.6	461.6	17,100 *
210	72.4	457.2	16,700 *
220	71.1	452.5	16,300 *
230	69.8	447.5	16,000 *
240	68.4	442.2	15,700 *
250	67.1	436.7	15,400 *
260	65.8	430.8	15,100 *
270	64.4	424.6	14,800 *
280	63.0	418.1	14,500 *
290	61.6	411.2	14,300 *
300	60.1	403.9	14,000 *
310	58.7	396.3	13,800 *
320	57.2	388.2	13,600 *
330	55.6	379.7	13,300 *
340	54.1	370.6	13,200 *
350	52.5	361.1	13,000 *
360	50.8	351.0	12,800 *
370	49.1	340.4	12,600 *
380	47.3	329.0	12,500 *
390	45.5	316.9	12,400 *