

Evvy 30-23 4 t

POTAIN®


Simply connected

Maximum capacity: 4 t at 9.5 m

Maximum load at jib nose: 1 t at 30 m

Hook height with jib horizontal: 22.9 m


Hook height with jib raised 30°: 35 m

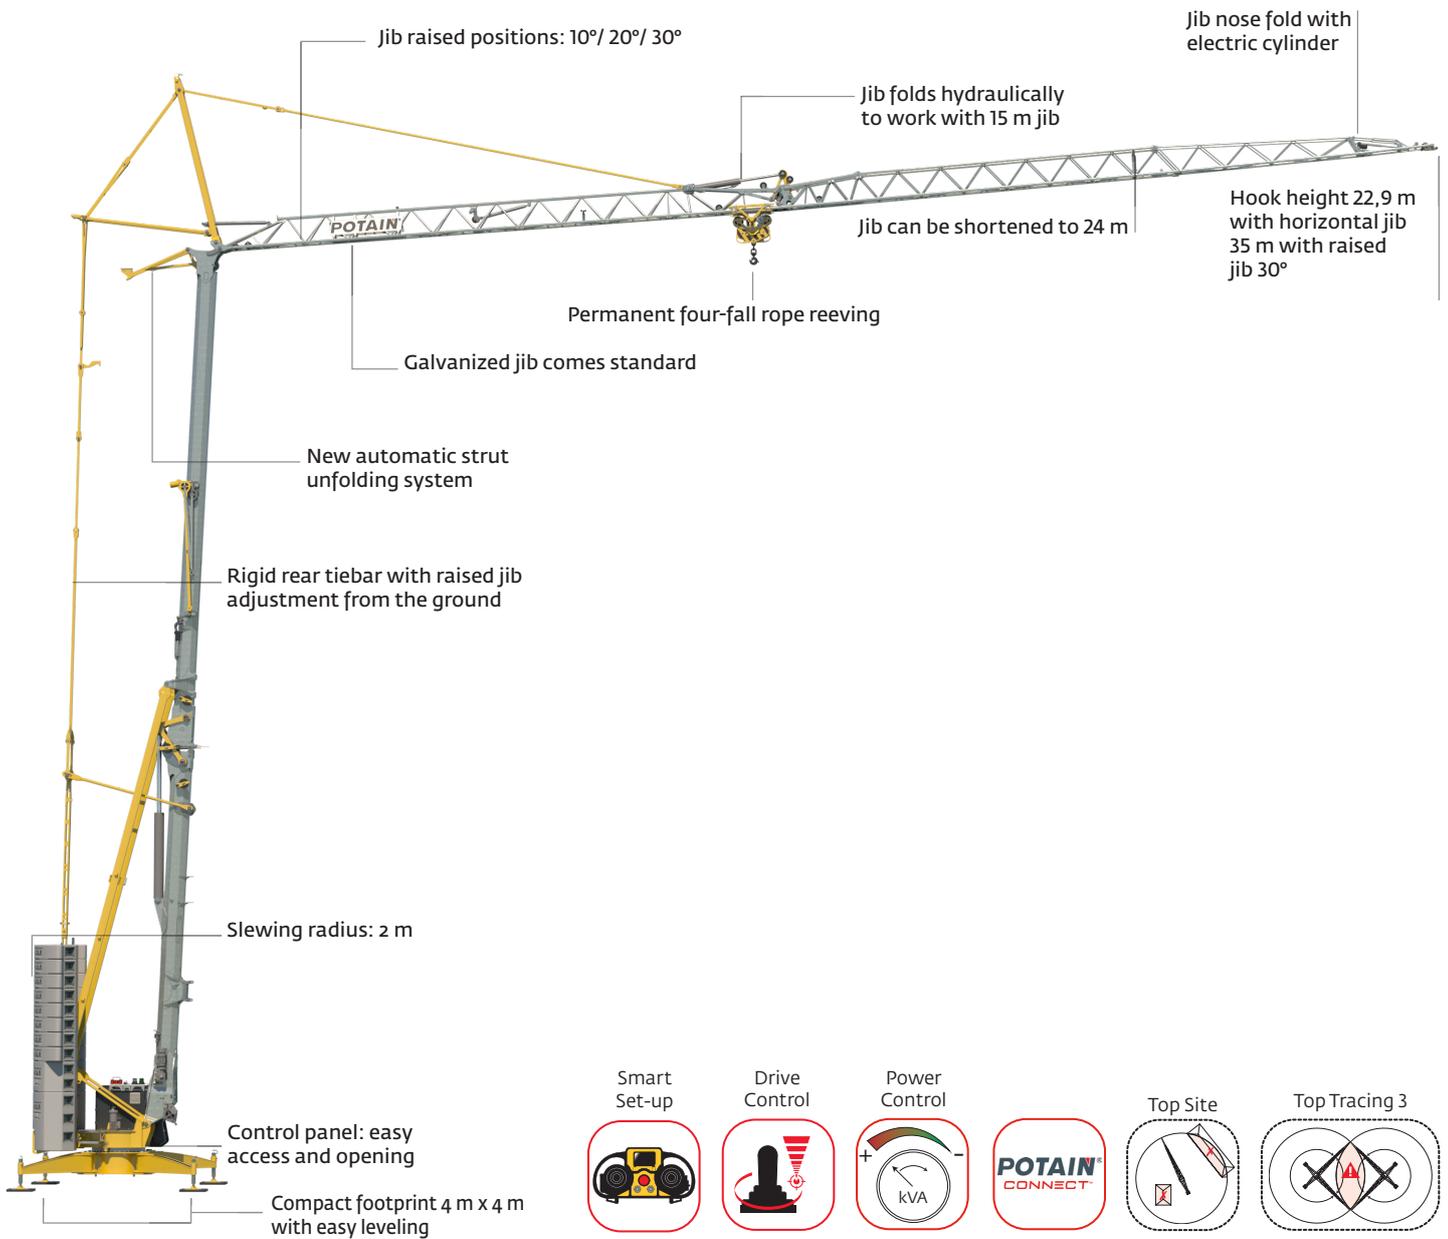

> Contact your local dealer for more information. Go to www.manitowoc.com to find your dealer.

A connected crane

- Equipped with Potain Crane Control System (CCS) providing centralized management of safety devices
- 7-inch color touchscreen for maintenance and diagnostic assistance
- Equipped with Potain CONNECT telematics for remote diagnostic and troubleshooting as well as monitoring and analysis of crane use
- Quick start guide via QR code located on crane




- Potain CONNECT ASSIST: troubleshooting application available on smartphone

Performance and productivity

- Several jib and crane footprint configurations to meet job site requirements
- Horizontal hook height of 22,9 m and up to 35 m with jib raised 30°
- High performance HPL™ hoisting winch combined with permanent 4-fall rope-reeving for better control
- New HPS slewing with multiple operating profiles for greater productivity
- Power Control function: 480V 3-phase allows operator to adjust for power available on site

Easy to erect

- Crane (jib, mast section) unfolds with no manual operations:
 - Automatic unfolding of the strut
 - Jib nose with electric cylinder
- A 6-position adjustable outrigger system capable of leveling up to 8% slope
- User-friendly installation assistance with Smart Set-up technology

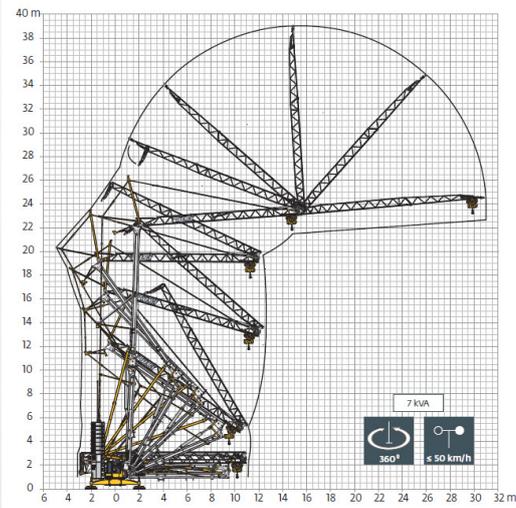

- Less set-up space required due to new jib nose folding sequence



Transport

- As easy as ever to transport, Evy is compatible with existing transport axles
- Road transport 25 km/h with draw-bar or 80 km/h with fifth-wheel



Ballasting

- Optimized ballast block centering system
- Capable of handling two ballast slabs simultaneously (with option ballasting derrick)
- Integrated steps in each ballast block for easy access