


DISTANCE FROM MACHINE (IN METERS)

3.1m 6.1m 9.1m 12.2m 15.2m 18.3m 21.3m 24.4m 27.4m 30.5m 33.5m 36.6m 39.6m 42.7m 45.7m 48.8m 51.8m 54.9m 57.9m 61.0m 64.0m 67.0m 70.1m 73.2m 76.2m 79.3m 82.3m 85.4m 88.4m 91.4m 94.5m

NO. B10:500 BOOM
86 DEG.
BOOM ANGLE

NO. LJ10:501
LUFFING JIB
75 DEG.
JIB ANGLE

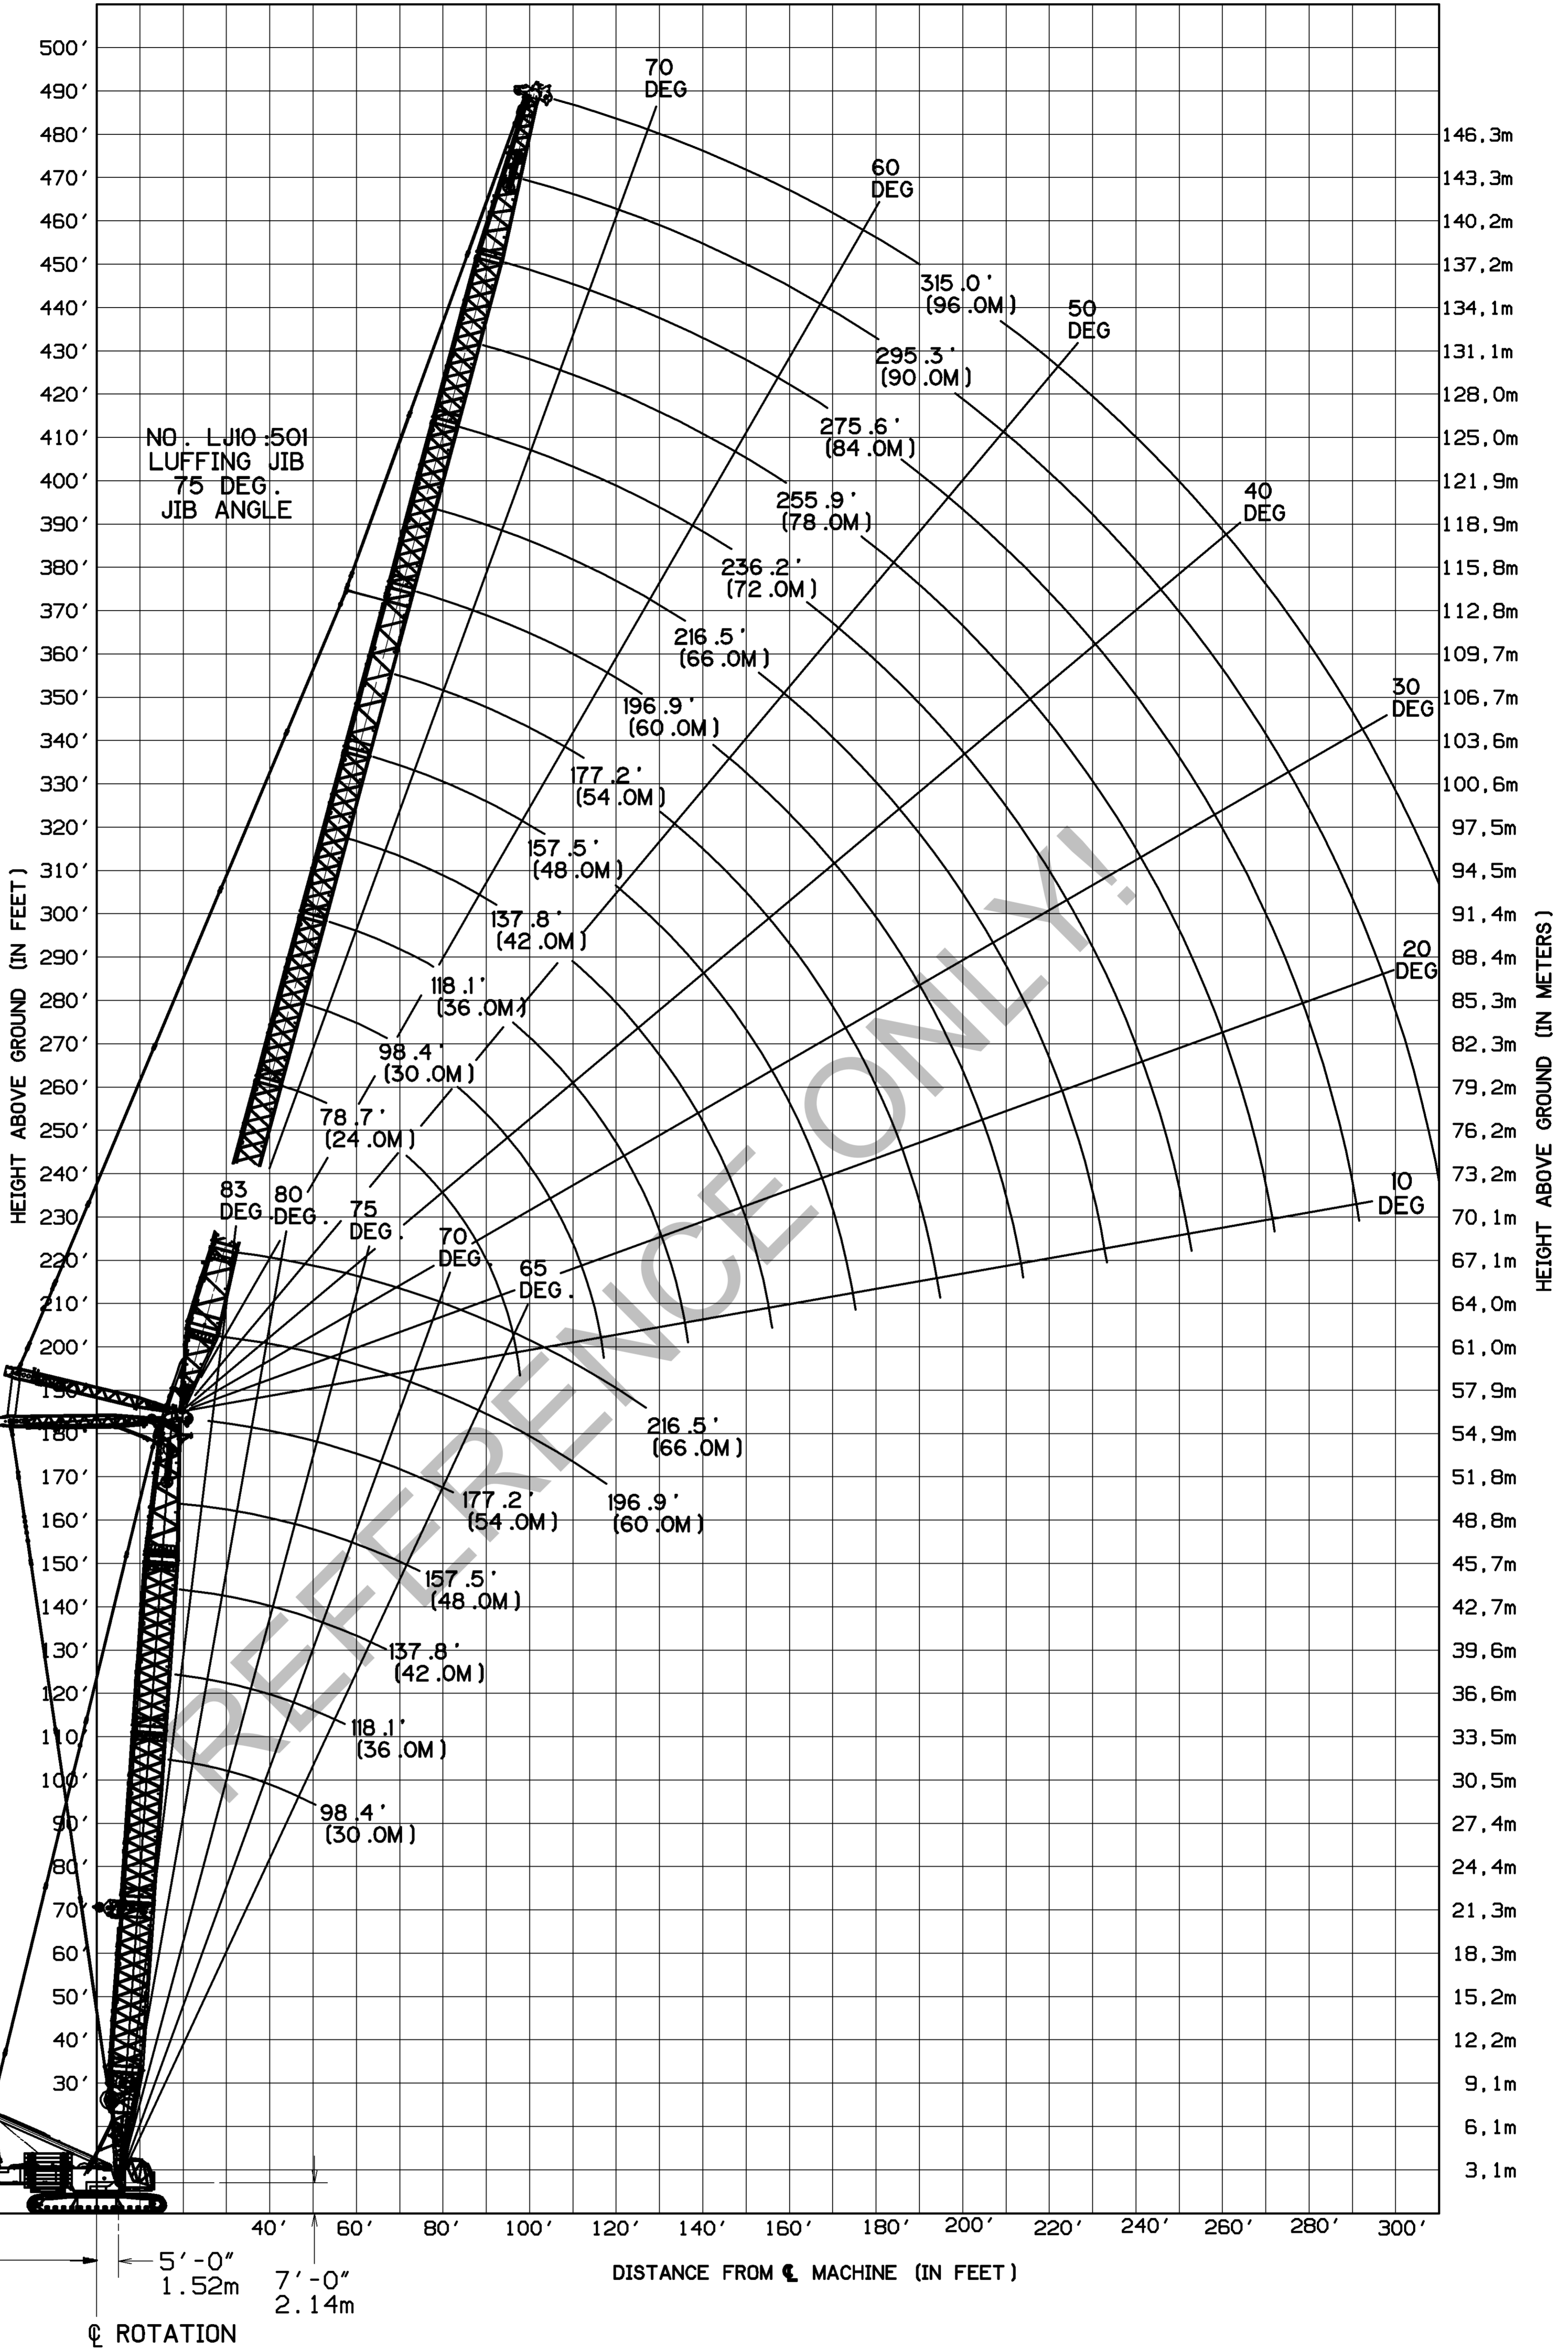

28'-2"
8.59m
TAILSWING
(MAX POSITION)

5'-0"
1.52m

7'-0"
2.14m

CL ROTATION

DISTANCE FROM MACHINE (IN FEET)

DATE 10-19-15	SCALE	Manitowoc Cranes, Inc.	REVISION DATE	THIS PRINT REMAINS THE PROPERTY OF MANITOWOC CRANES, INC. IT IS LOANED, SUBJECT TO RETURN UPON DEMAND, AND ON EXPRESS CONDITION THAT IT IS NOT TO BE COPIED OR USED DIRECTLY OR INDIRECTLY IN ANY MANNER DETRIMENTAL TO OUR INTERESTS.	TOLERANCE UNLESS OTHERWISE SPECIFIED		
REV. LTR. A	DR:KJK CK:DLG	Manitowoc, Wisconsin	DIAGRAM		DECIMAL PLACES	FABRICATION	MACHINING
DWG. NO. 84030436	APP:DLG	MODEL:MLC300	RNG LJ10:501/B10:500		(1) PLACE 0.0 ±.12 > 10 FEET ±.18	(2) PLACE 0.00 ±.06 > 12 ±.015	(3) PLACE 0.000 ±.005 > 11'30" ±.01