




MDT 809 M32

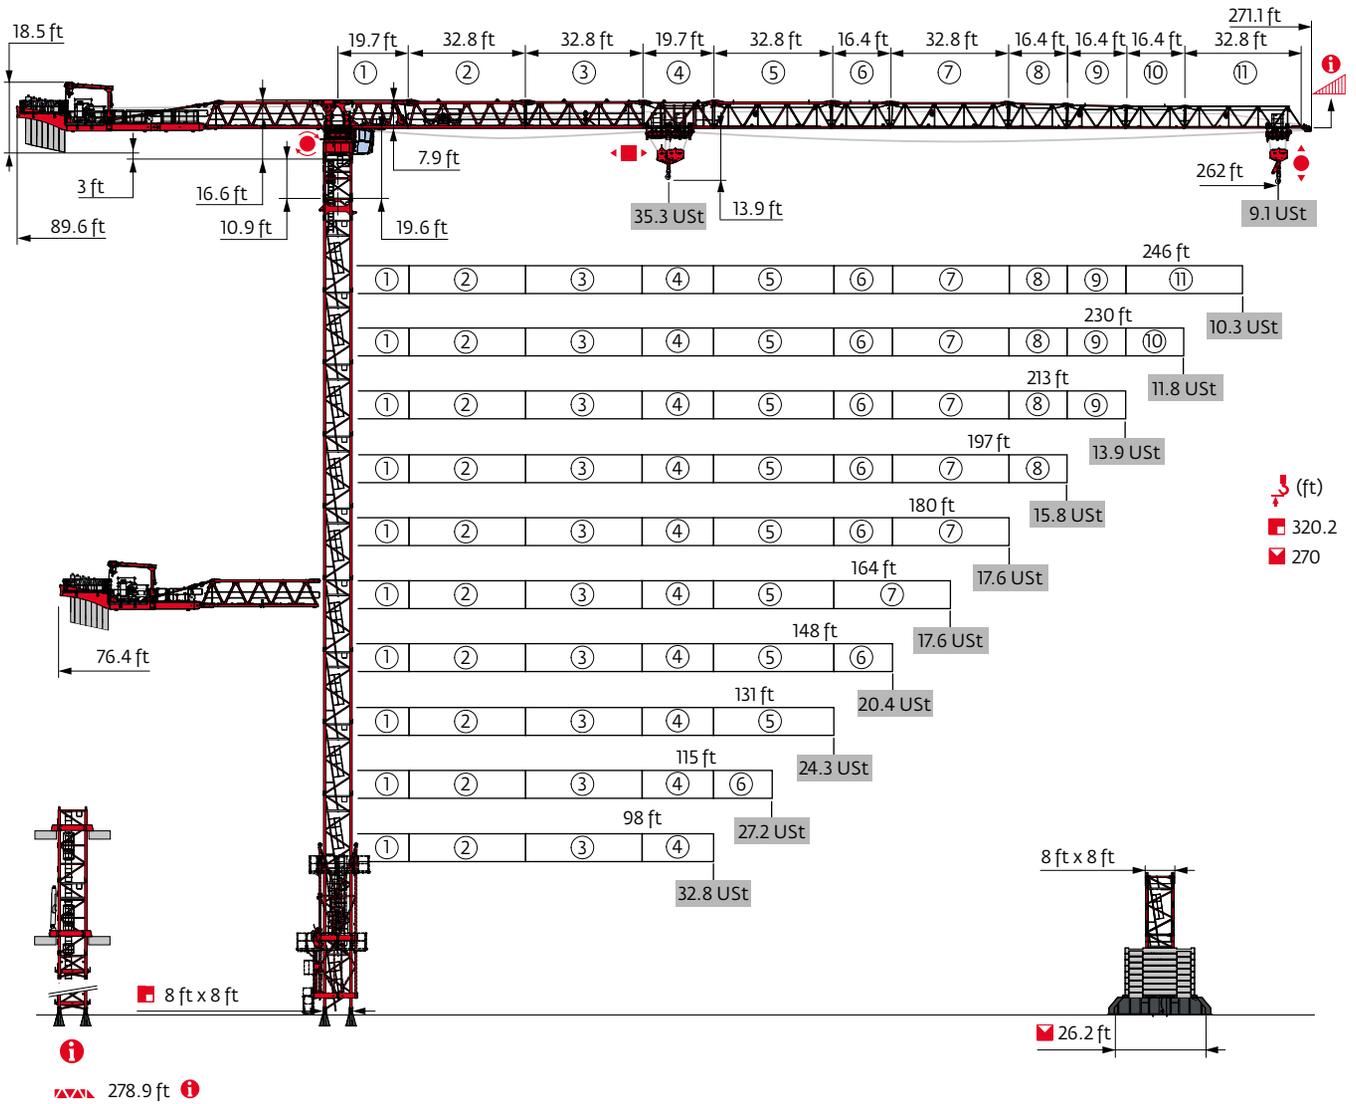


Potain Plus Power Control



Top Site



Anti-collision systems




Automatic Rotation Control



Mast - Reactions

8 ft - P 854A											
Height (ft)	98	115	131	148	164	180	197	213	230	246	262
↓ (ft)	270.3	259.2	264.8	264.8	275.6	270.3	264.8	264.8	259.2	259.2	253.9
↓/P _r (ft)	253.9	248.4	248.4	242.8	264.8	242.8	248.4	242.8	259.2	259.2	253.9
10.9 ft	1	1	1	1	1	1	1	1	1	1	1
6.2 ft	1	1	1	1	1	1	1	1	1	1	1
10.9 ft	1	0	2	2	0	1	2	2	0	0	1
16.4 ft	15	15	14	14	16	15	14	14	15	15	14
F2 (Ust)	● 411 ■ 543	404 489	410 524	409 533	406 569	412 553	401 539	409 547	413 525	401 532	397 522
F3 (Ust)	● 273 ■ 423	267 370	266 397	262 402	254 435	262 420	251 407	257 412	260 389	248 397	244 387

8 ft - P 880A											
Height (ft)	98	115	131	148	164	180	197	213	230	246	262
↓ (ft)	320.2	309.1	309.1	309.1	320.2	314.6	314.6	309.1	309.1	303.8	298.2
↓/P _r (ft)	309.1	292.7	292.7	292.7	309.1	292.7	292.7	287.4	303.8	303.8	298.2
10.9 ft	1	1	1	1	1	1	1	1	1	1	1
6.2 ft	1	1	1	1	1	1	1	1	1	1	1
10.9 ft	1	0	0	0	1	2	2	0	0	1	2
16.4 ft	18	18	18	18	18	17	17	18	18	17	16
F2 (Ust)	● 488 ■ 855	491 778	483 757	486 779	478 853	494 869	484 854	485 793	470 775	475 762	477 745
F3 (Ust)	● 320 ■ 706	322 627	312 604	311 622	301 694	315 708	305 692	305 631	296 619	297 602	300 586

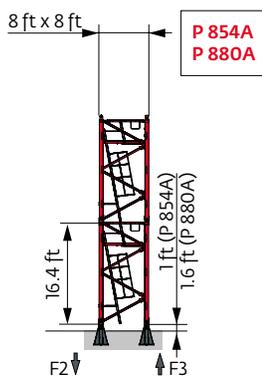


Note: When "ASCE" is noted in this data sheet it is referring to 115 mph Wind Zone, Exposure B, Design Wind Speed = 98 mph. See back cover for design wind speed calculations.

Motorized accesses: adapted mast compositions, base ballast and reactions.

Other mast compositions - Please consult us

8 ft - ZY 854 -

WIND (ft)	98	115	131	148	164	180	197	213	230	246	262
\bar{z} (ft)	270	264.8	253.6	264.8	259.2	253.6	248.4	248.4	248.4	248.4	242.8
\bar{z}/P_z (ft)	215.6	237.2	193.6	199.2	253.6	193.6	188	193.6	226.4	232	232
	10.9 ft	1	1	1	1	1	1	1	1	1	1
	6.2 ft	1	1	1	1	1	1	1	1	1	1
	10.9 ft	2	0	2	0	1	2	0	0	0	1
	16.4 ft	14	15	13	15	14	13	14	14	14	13
FI (USt)	● 246	243	234	243	231	235	232	237	236	233	238
	■ 269	247	226	255	243	233	221	227	233	239	239

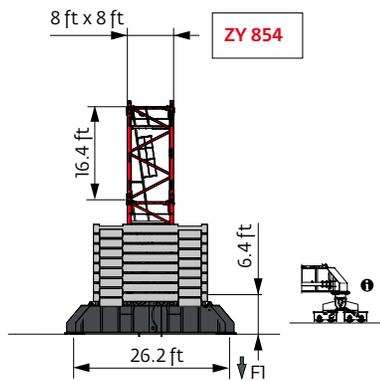

Anchorage




Base ballast

(Ust) / 8 ft - ZY 854 -											
▲▲▲ (ft)	98	115	131	148	164	180	197	213	230	246	262
270	158.7										
264.8	158.7	158.7		145.5							
259.2	145.5	145.5		132.3	119.1						
253.6	145.5	145.5	145.5	132.3	132.3	158.7					
248.4	145.5	145.5	132.3	132.3	132.3	158.7	158.7	172	172	172	
242.8	145.5	145.5	132.3	132.3	132.3	158.7	158.7	172	172	172	198.4
226.4	132.3	145.5	119.1	119.1	119.1	145.5	158.7	158.7	158.7	172	185.2
210	132.3	132.3	105.8	92.6	92.6	145.5	158.7	158.7	158.7	158.7	185.2
193.6	119.1	105.8	105.8	105.8	92.6	145.5	145.5	145.5	158.7	158.7	172
177.2	105.8	92.6	92.6	92.6	92.6	132.3	145.5	145.5	145.5	158.7	172
160.8	92.6	92.6	79.4	79.4	92.6	132.3	132.3	145.5	145.5	158.7	158.7
144.4	92.6	92.6	79.4	79.4	79.4	132.3	132.3	132.3	145.5	158.7	158.7
128	92.6	92.6	79.4	79.4	79.4	119.1	132.3	132.3	145.5	158.7	158.7
111.6	92.6	92.6	79.4	79.4	79.4	119.1	119.1	119.1	145.5	158.7	158.7
95.1	92.6	92.6	79.4	79.4	79.4	119.1	119.1	119.1	145.5	158.7	158.7
78.7	92.6	92.6	79.4	79.4	79.4	105.8	105.8	119.1	145.5	158.7	158.7
62.3	92.6	92.6	79.4	79.4	79.4	105.8	105.8	119.1	145.5	158.7	158.7


Counter-jib ballast

▲▲▲	180 HPL™			320 LVF GH		
	14,551 lb	10,362 lb	(lb)	14,551 lb	10,362 lb	(lb)
262 ft	7	0	101,854	5	2	93,476
246 ft	6	1	97,665	4	3	89,287
230 ft	5	2	93,476	6	0	87,303
213 ft	4	3	89,287	5	1	83,114
197 ft	6	0	87,303	4	2	78,925
180 ft	4	2	78,925	5	0	72,753
164 ft	6	1	97,665	4	3	89,287
148 ft	4	3	89,287	5	1	83,114
131 ft	5	1	83,114	3	3	74,737
115 ft	4	1	68,564	3	2	64,375
98 ft	3	2	64,375	3	1	54,013

CCP - 14,551 lb

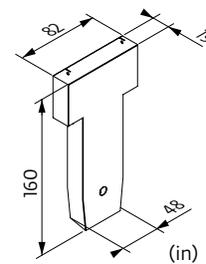







CCQ - 10,362 lb













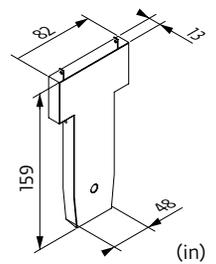


Dimensions and weight

Slewing crane part:  262 ft -  -  -  180 HPL™



Slewing crane part		L (ft)	W (ft)	H (ft)	lb (+/- 5%)
Counter-jib		25.9	7.4	7.4	23,171
		39.4	7.4	7.4	31,978
		34	4.5	8.1	21,142
		39.7	21.9	13.7	27,040
	180 HPL™ 320 LVF GH				
		52.8	21.9	13.7	35,891
	180 HPL™ 320 LVF GH				
Hoisting winch (+ rope)		15.8	6.3	6.5	16,698
	180 HPL™ 320 LVF GH	18.4	7.2	7.8	31,150
Cab		11	7.5	8.2	6,614
Towerhead		8.5	8.2	9.7	34,392
		22.5	8.2	9.7	41,006
	∇ 8 ft				
Jib section		25.6	5.1	8.2	27,893
		34.5	7.3	8.2	27,133
		34.1	4.8	8.1	18,683
		20.9	4.5	7.9	8,754
		34.4	4.5	7.8	10,983
		33.9	4.5	7.5	7,043
		33.2	4.5	6.4	3,103

			L (ft)	W (ft)	H (ft)	lb (+/- 5%)
Jib section		⑥	17.8	4.5	7.7	4,859
		⑧	17.3	4.5	7.3	3,013
		⑨	17.3	4.5	6.8	2,175
		⑩	17.3	4.5	6.7	1,955
			5.5	5.2	1.9	728
Trolley		 35.3 USt	8.6	5.7	5.2	2,678
Pulley block		 35.3 USt	6.2	2.6	10.4	3,120
Trolley		 35.3 USt	13.8	5.9	4.9	3,219
Pulley block		 35.3 USt	7.5	1.1	9.7	2,888
Trolley		 17.6 USt	6.9	5.9	4.9	1,720
Pulley block		 17.6 USt	5	1.1	10	1,786
Trolley inspection platform			3.1	3.4	7	125
Crane tower						
T 851		 8 ft	36.7	15.9	19	34,723
K 85/K 85-2		 8 ft	7.3	10.7	8.2	7,937
KM 850.10B KM 850.14B KMT 850.10A KMT 850.14A K 88/K 85A2 KM 880.10A KMT 880.10A KMT 850.10C		 8 ft	33.9 33.9 17.5 17.5 17.5 17.8 17.8 12	8.3 8.3 8.3 8.3 8.2 8.3 8.3 8.3	8.2 8.2 8.2 8.2 8.2 8.3 8.6 8.2	22,201 24,670 12,015 13,206 18,281 18,453 19,180 9,326
Fixing angles		P 854A P 880A	3 3.3	3 3.3	4.9 6.2	2,072 3,536
1/2 Cross girder		ZY 854	18.7	3.2	7.4	14,176
Cross girder		ZY 854	39	4.7	7.4	30,865

Mechanisms

480 V - 60 Hz													hp	kW	
	180 HPL™ 80	fpm	139	172	230	358	495	71	87	115	184	248	180	132	1,660 ft
		USt	17.6	13.2	8.8	4.4	2	35.3	26.5	17.6	8.8	5.2			
	320 LVF 80 GH Optima	fpm	277	351	474	663	705	138	176	243	353	320	240	3,488 ft	
		USt	17.6	13.2	8.8	4.4	3.6	35.3	26.5	17.6	9.4				
	15 DVF 16 Optima	fpm	0 → 108 (35.3 USt) 0 → 164 (22 USt) 0 → 220 (11 USt) 0 → 328 (2.8 USt)									15	11		
	RVF 174 Optima +	rpm	0 → 0.7									4 x 10	4 x 7.5		

480 V (+6% -10%) 60 Hz	180 HPL™: 194 → 122 kVA 320 LVF GH: 306 → 178 kVA	

These mast combinations meet the EN 14439 and ASME B30.3-2016 specifications for "out of service" wind conditions, provided the illustrated wind speed matches required design wind speed for the location of the tower crane. The "out of service" design wind speed was determined in accordance with ASCE 7-10, Figure 26.5-1A. The wind velocity, used for this configuration was 98 mph (158 kph), which represents a nominal design 3-second wind gust at 33 ft (10 m) above ground for Exposure B category. A factor of 0.85 was applied to the 700-year ultimate design wind speed of 115 mph (185 kph), per ASCE 37-02, with the assumption that this crane is considered a temporary structure used during a construction period of 2 years or less.

- Jib elevation
- Standard equipment
- Options
- Potain Plus function: Plus load curves
- Hook heights with Plus load curves
- Reactions in service
- Reactions out of service
- Total ballast weight
- Lorry 44 ft
- Container High Cube 40 ft, and/or Flat Rack 20 ft
- Hoisting
- Trolleying
- Slewing
- Travelling
- Required power
- Power Control Function: winch speeds adapted to the available power
- Consult us

This commercial document is not legally binding. For any technical information, please refer to the corresponding instructions.

