



## MC 系列 MC 170C

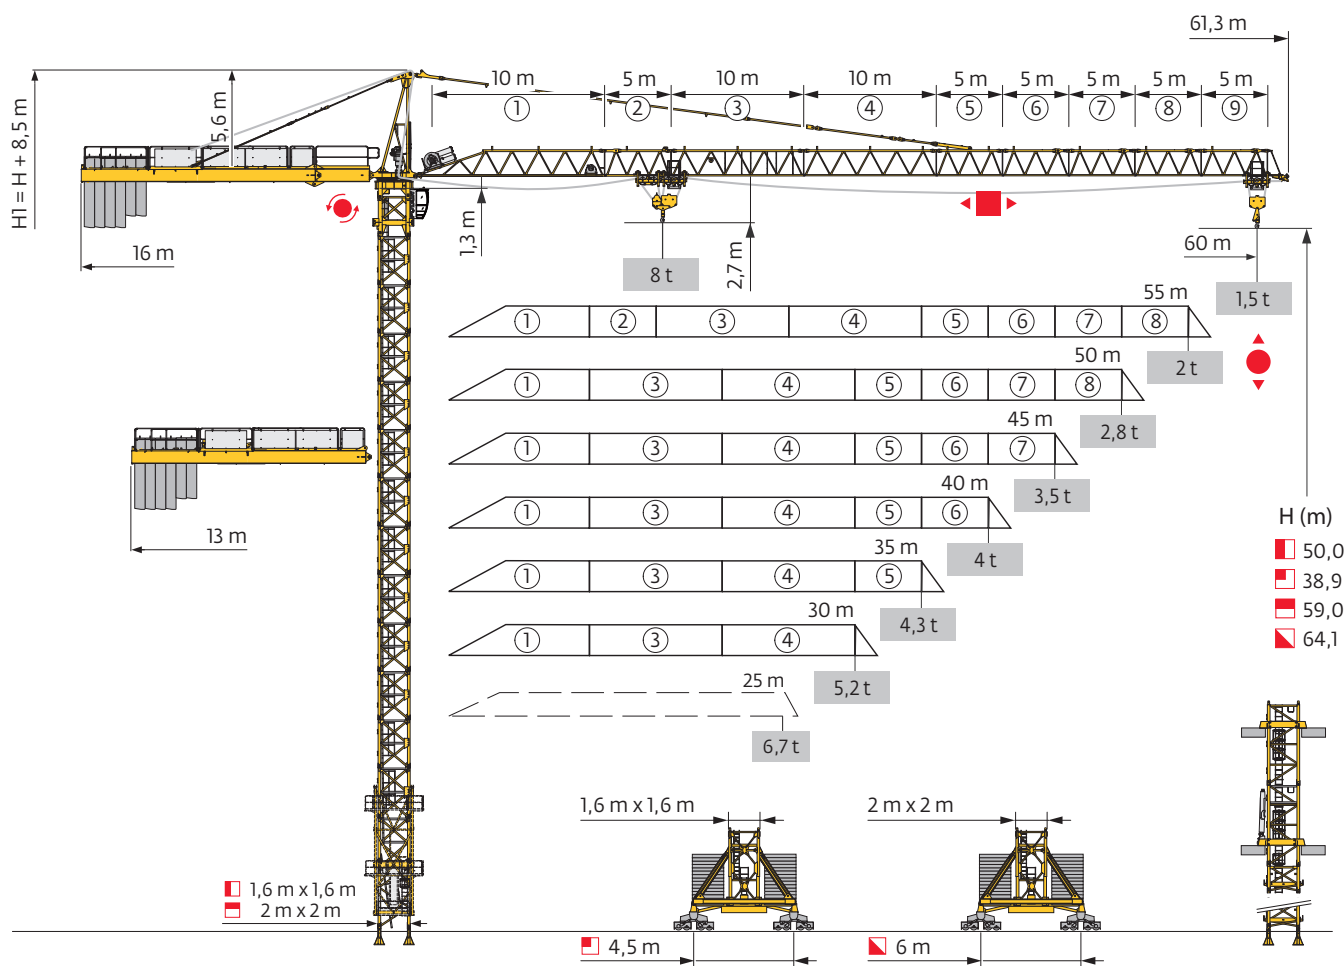

塔身组成 - 反力


□ 1,6 m

▲▲▲ 30 m → 60 m

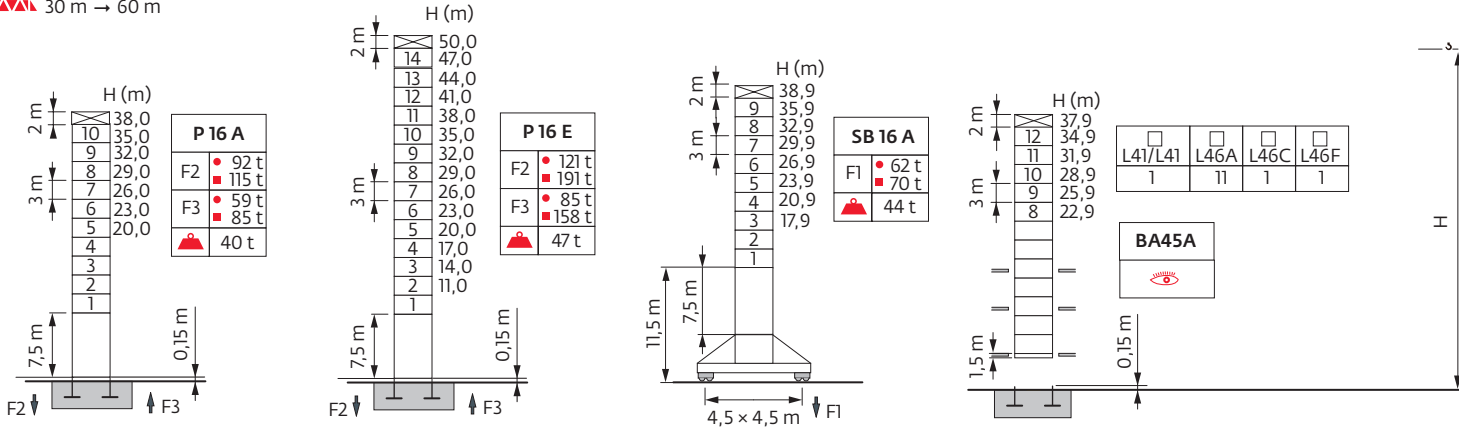


□ 2 m

▲▲▲ 30 m → 60 m

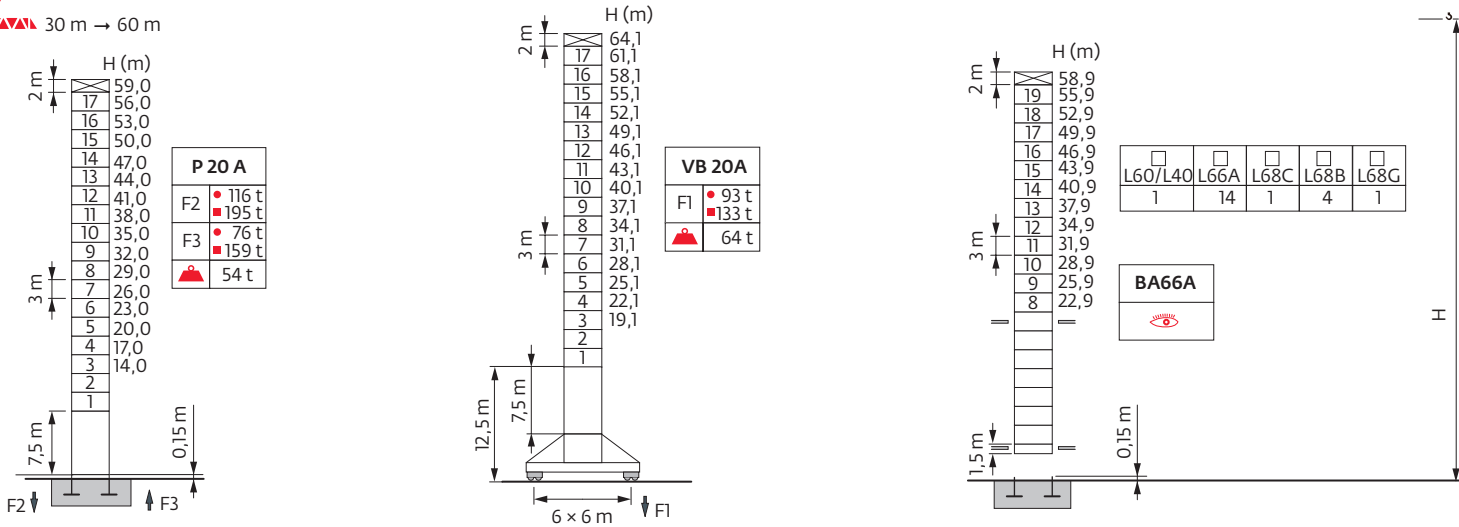


内爬塔机

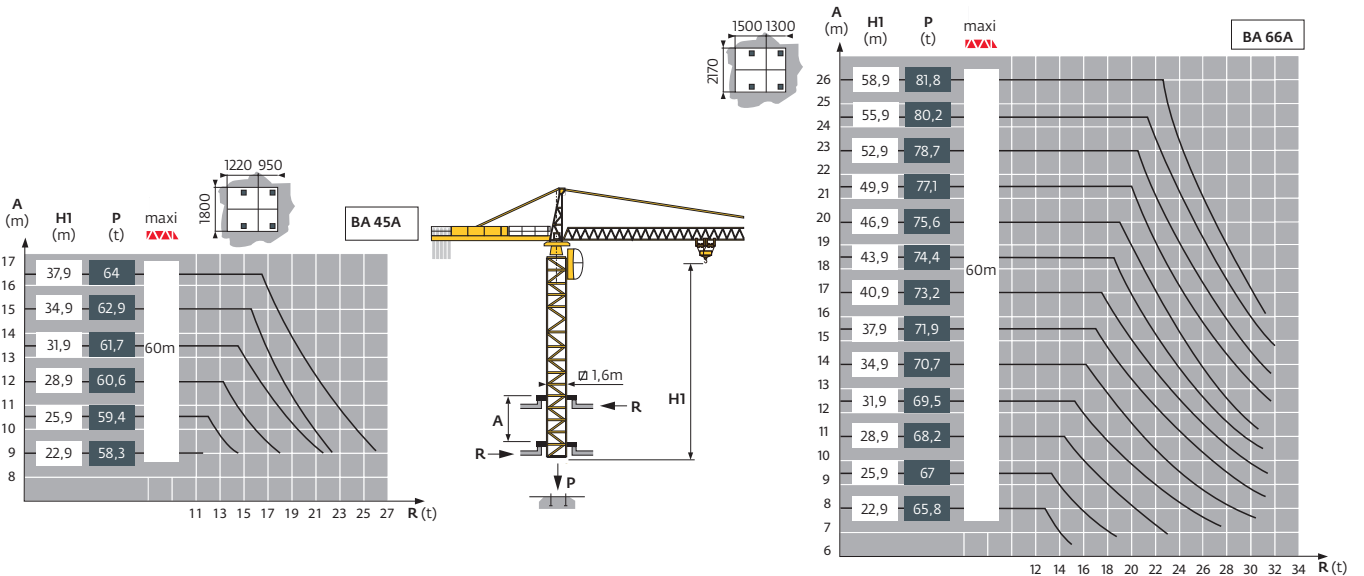


附着

P 16A AL 400

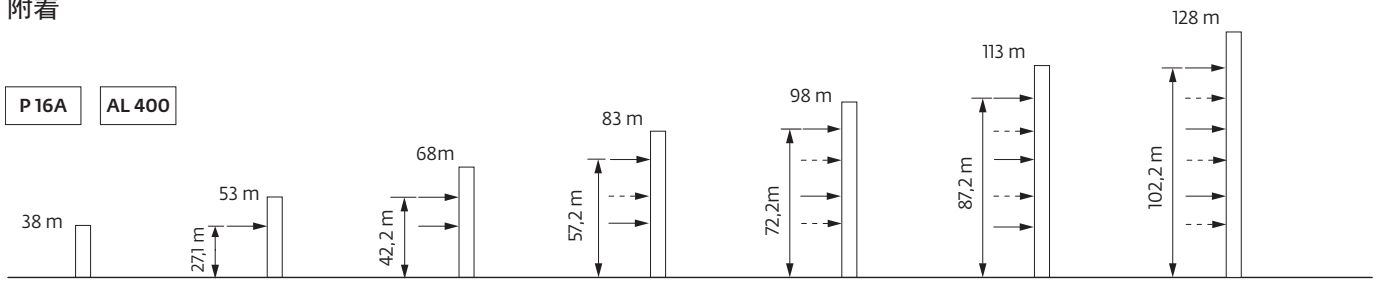


**i** H > 128m

P 16E AL 400

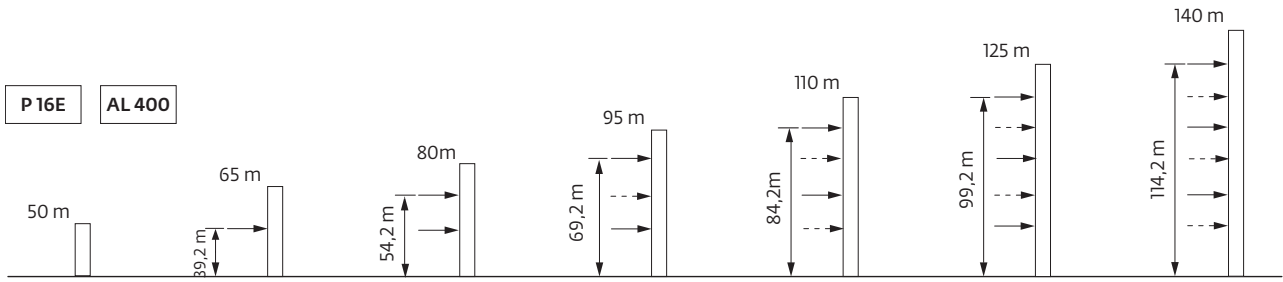

**i** H > 140m

P 20A AL 600

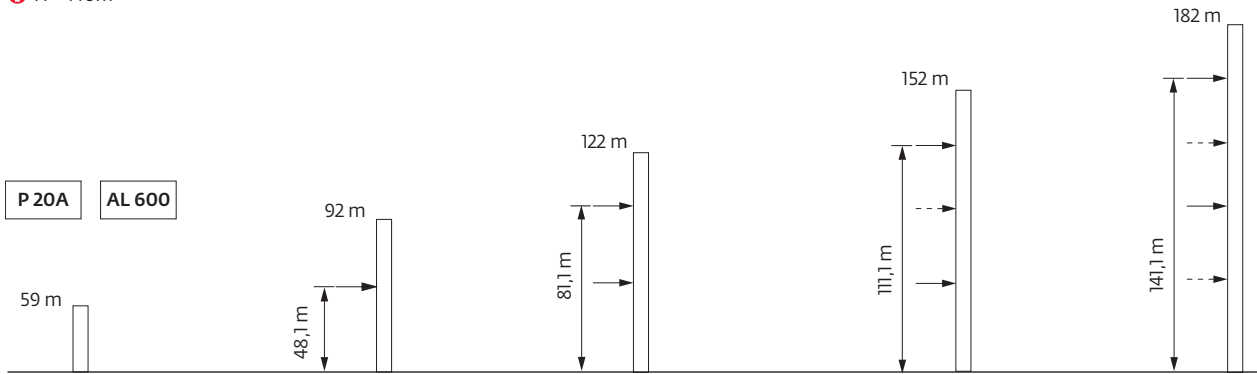


**i** H > 182m

负荷曲线



60 m	3,1	▶	14,4	15	17	20	22	25,3	27,5	30	32	35	37	40	42	45	47	50	52	55	57	60	m
▲▼▲▼			8	7,6	6,6	5,4	4,8	4	4	3,6	3,3	3	2,8	2,55	2,4	2,2	2,1	1,9	1,8	1,7	1,6	1,5	t
55 m	3,1	▶	16,3	17	20	22	25	27	28,7	31,2	35	37	40	42	45	47	50	52	55				m
▲▼▲▼			8	7,6	6,3	5,6	4,8	4,3	4	4	3,5	3,3	3	2,8	2,6	2,45	2,25	2,15	2				t
50 m	3,1	▶	19,3	20	22	25	27	30	32	34	34,1	37	40	42	45	47	50						m
▲▼▲▼			8	7,7	6,8	5,9	5,3	4,7	4,3	4	4	4	3,7	3,5	3,2	3	2,8						t
45 m	3,1	▶	20,9	22	25	27	30	32	35	37	40,1	42	45										m
▲▼▲▼			8	7,5	6,5	5,9	5,2	4,8	4,3	4	4	3,8	3,5										t
40 m	3,1	▶	20,8	22	25	27	30	32	35	36,8	40												m
▲▼▲▼			8	7,5	6,4	5,9	5,2	4,8	4,3	4	4												t
35 m	3,1	▶	20,9	22	25	27	30	32	35														m
▲▼▲▼			8	7,5	6,5	5,9	5,2	4,8	4,3														t
30 m	3,1	▶	20,9	22	25	27	30																m
▲▼▲▼			8	7,5	6,5	5,9	5,2																t
25 m	3,1	▶	21,5	22	25																		m
▲▼▲▼			8	7,8	6,7																		t




压重

1,6 m	SB 16A	H (m)	38,9	35,9	32,9	29,9	26,9	23,9	20,9	17,9								
			66	60	60	60	54	54	54	54								
2 m	VB 20A	H (m)	64,1	61,1	58,1	55,1	52,1	49,1	46,1	43,1	40,1	37,1	34,1	31,1	28,1	25,1	22,1	19,1
			132	120	108	84	72	60	48	36	36	36	36	36	36	36	36	36


起重臂重量&平衡臂配重

起重臂长度	起重臂重量 (kg) (+/- 5%)		50 LVF / 45 RCS 平衡臂配重		
	吊钩端	平衡臂端	3450 kg	2250 kg	总配重 (kg)
60 m	9315	9705	4	2	18 300
55 m	9055	9445	3	3	17 100
50 m	8305	8695	3	2	14 850
45 m	8045	8435	5	1	19 500
40 m	7730	8120	4	2	18 300
35 m	7335	7725	3	3	17 100
30 m	6815	7205	3	2	14 850
25 m	6240	6630	3	2	12 600

CD - 3450 kg







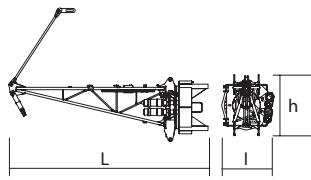
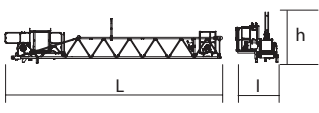


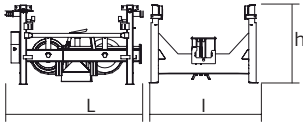

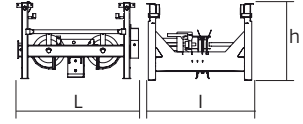

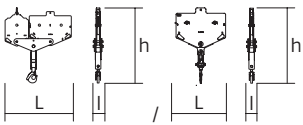



CE - 2250 kg











尺寸重量表

塔机回转部分 :  60 m -  50LVF / 60LVF



塔机回转部分	L (m)	l (m)	h (m)	kg (+/- 5%)		
平衡臂		11,94	1,02	0,46	1610	
		3,43	1,02	0,34	530	
驾驶室		Smartview	1,68	1,18	2,31	385
驾驶室		V140S	3,4	1,9	2,57	1130
塔帽		6,64	2,2	1,68	5530	
起重臂根部节		① 60 LVF 10,2 50 LVF 10,2	2,05 2,05	1,17 1,17	3900 3410	
起重臂节		③ 10,2 ④	1,05	1,42	1325	
起重臂节		② 5,14 ⑤ 5,18 ⑥ 5,18 ⑦ 5,18 ⑧ 5,18 ⑨ 5,18	1,05 1,05 1,05 1,05 1,05	1,42 1,17 1,17 1,17 1,17	750 520 395 315 260 260	
后小车		 8 t 4 t	1,42	1,3	0,96	240
前小车		 8 t	1,48	1,3	0,96	235
吊钩		 8 t	1,26	0,2	1,52	270
		 4 t	0,78	0,2	1,29	115

顶升装置		L (m)	l (m)	h (m)	kg (+/- 5%)	
顶升套架		1,6m	6,8	3,65	3,9	3430
<b>塔身节</b>						
S 46 J SR 48 JR		1,6m 1,6m	7,8 7,8	1,8 1,7	1,7 1,7	2630 3186
S 68 J		2 m	7,74	2,1	2,1	4170
L 46 A3 L 66 A3 L 68 B3		1,6m 2 m 2 m	3,24 3,26 3,26	1,67 2,12 2,12	1,73 2,12 2,12	1180 1410 1530
<b>塔机底座</b>						
固定支脚		P 16 A R 16 A P 16 E R 16 E P 20 A R 20 A	0,49 0,5 1,31 0,8 1,4 0,81	0,49 0,5 0,8 0,6 0,6 0,6	1,14 0,69 0,8 0,6 0,6 0,6	185 145 500 200 300 225
行走基节		SB 16 A VB 20 A	3,61 5,07	1,96 2,39	1,96 2,39	2645 4360
斜撑		SB 16 A VB 20 A	3,18 4,51	0,25 0,26	0,24 0,27	230 390
底架		SB 16 A VB 20 A	5,08 6,7	0,61 0,7	1,79 2,31	1115 1600


## 机构

380 V - 50 Hz													hp	kW	
	60 LVF 20	m/min	5	15	47	70,5	94	2,5	7,5	23,5	35,3	47	60	45	445 m
		t	4	4	4	3	2	8	8	8	6	4			
	5 D3 V4	m/min	15 - 30 - 58									5	3,7		
	RCV145	rpm	0 → 0,8									2 x 6	2 x 4,4		
	SB16A RT 324 R ≥ 10 m	m/min	12,5 - 25									2 x 7	2 x 5,2		
	VB20A RT 544 R ≥ 13 m	m/min	13,5 - 27									4 x 7	4 x 5,2		


380 V - 50 Hz													hp	kW			
	50 LVF 20 Optima	m/min	3,8	14,8	46	58	84	112	1,9	7,4	23	29	42	56	50	37	363 m
		t	4	4	4	3	2	1	8	8	8	6	4	2			
	7 DVF 4	m/min	0 → 76									6,5	4,8				
	RCV145	rpm	0 → 0,8									2 x 6	2 x 4,4				
	SB16A RT 324 R ≥ 10 m	m/min	12,5 - 25									2 x 7	2 x 5,2				
	VB20A RT 544 R ≥ 13 m	m/min	13,5 - 27									4 x 7	4 x 5,2				





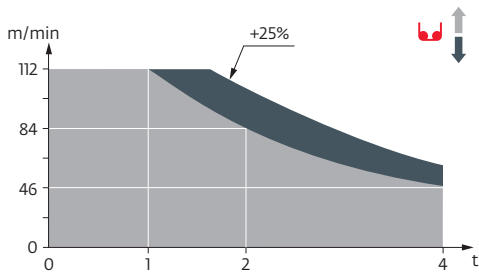



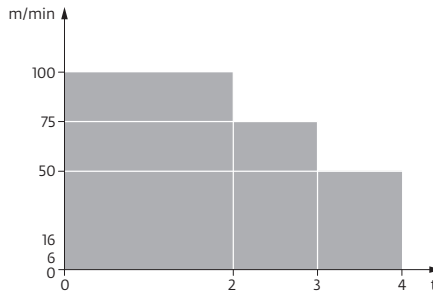







	IEC 60204-32		kVA
	380 V (+10% -10%) 50 Hz		60 LVF : 62 kVA 50 LVF : 54 kVA

50 LVF 20 Optima



60 LVF 20



-  上绕度
-  工作状态下的反力
-  非工作状态下的反力
-  起重机在无载荷、无配重、独立高度状态下的压重
-  总配重
-  13, 4m 卡车
-  40' 立方集装箱
-  坚固的附着框
-  松开的附着框
-  起升
-  变幅
-  回转
-  行走
-  额定功率
-  参阅内爬
-  联系我们



此商业文件不承担法律责任，对于任何技术信息，请查阅相应说明书。



马尼托瓦克起重设备（中国）有限公司

工厂地址：江苏省张家港市经济开发区（南）区金塘路55号  
 市场总部：上海市漕溪北路333号中金国际广场B座1103-1105室  
 总机：021-6457 0066  
 传真：021-6457 4985  
 邮编：200030