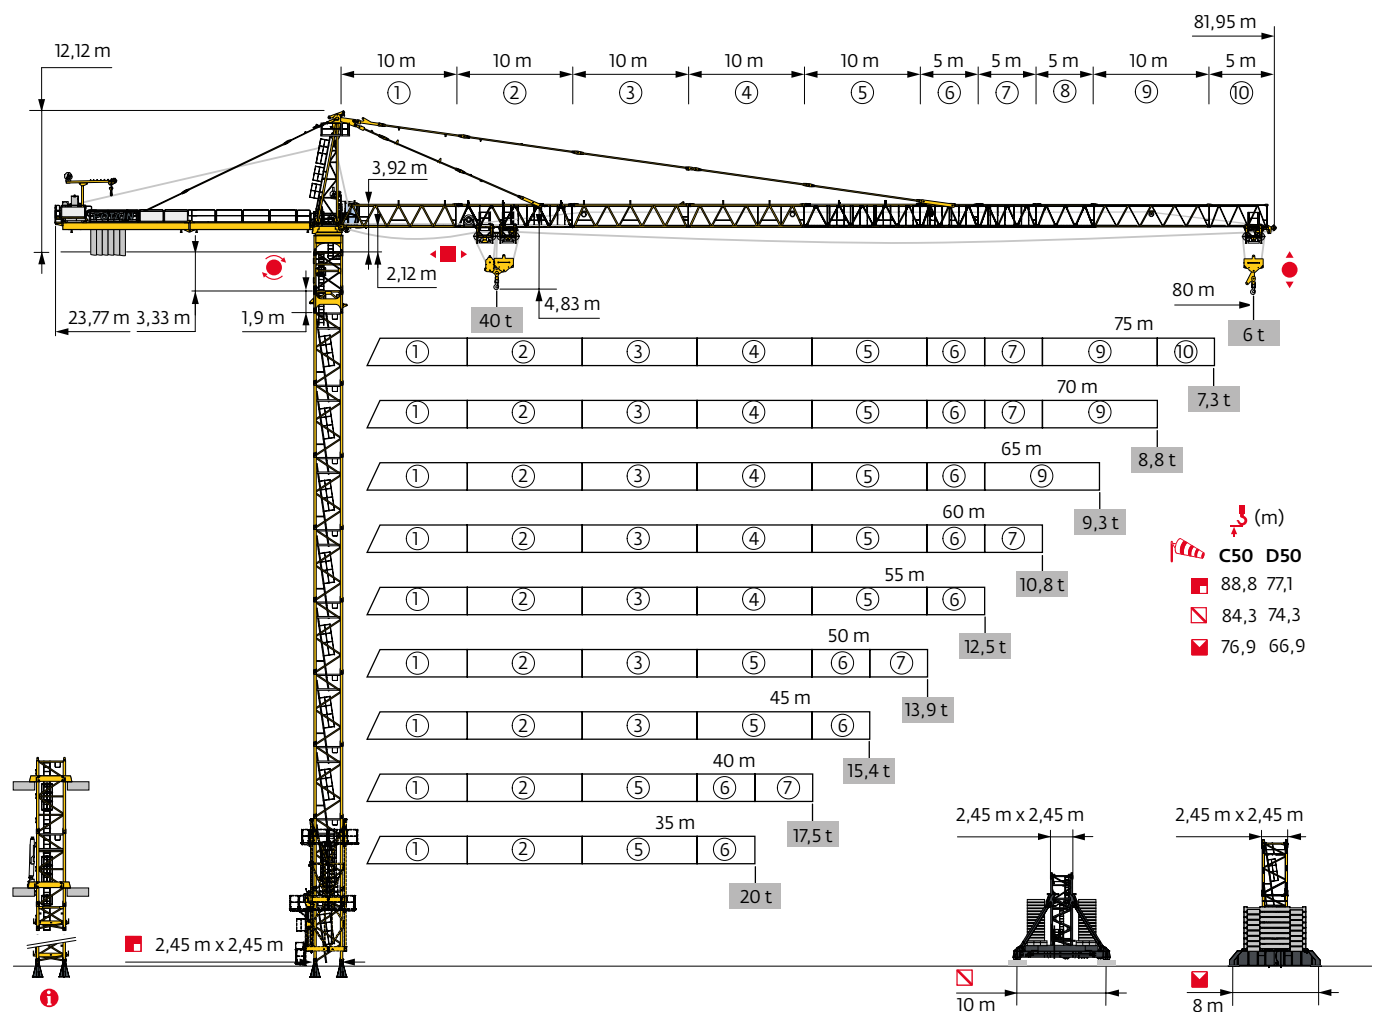




MD 689 M40




Potain Plus Power Control



Top Site



Anti-collision systems



Automatic Rotation Control






Mât - Réactions / Mast - Reaktionskräfte / Mast - Reactions / Mástil - Reacciones / Torre - Reazioni
Tramo - Reacções / Реакция опор мачты

2,45 m - P 854A - C50										
ΔVΔΔ (m)	35	40	45	50	55	60	65	70	75	80
(m)	78,6	78,6	78,6	78,6	78,6	78,6	78,6	78,6	78,6	75,2
/P ₊ (m)	78,6	78,6	78,6	78,6	78,6	78,6	78,6	78,6	78,6	75,2
	3,33 m	1	1	1	1	1	1	1	1	1
	1,9 m	1	1	1	1	1	1	1	1	1
	3,33 m	0	0	0	0	0	0	0	0	2
	5 m	15	15	15	15	15	15	15	15	13
F2 (t)	● 330	330	331	332	336	337	336	339	329	332
	■ 555	554	556	553	559	566	561	566	571	550
F3 (t)	● 226	224	224	221	222	221	219	220	207	211
	■ 471	468	468	463	464	470	464	466	469	449
(m) D50	68,6	68,6	68,6	68,6	68,6	68,6	68,6	68,6	68,6	66,9
/P ₊ (m) D50	68,6	68,6	68,6	68,6	68,6	68,6	68,6	68,6	68,6	66,9

2,45 m - P 880A - C50										
ΔVΔΔ (m)	35	40	45	50	55	60	65	70	75	80
(m)	88,8	88,8	88,8	88,8	88,8	87,1	87,1	87,1	87,1	85,4
/P ₊ (m)	88,8	88,8	88,8	88,8	88,8	87,1	87,1	87,1	87,1	85,4
	3,33 m	1	1	1	1	1	1	1	1	1
	1,9 m	1	1	1	1	1	1	1	1	1
	3,33 m	0	0	0	0	1	1	1	1	2
	5 m	17	17	17	17	16	16	16	16	15
F2 (t)	● 374	375	376	376	382	378	376	380	372	376
	■ 737	737	738	736	742	725	719	725	729	736
F3 (t)	● 259	257	257	255	255	250	248	249	241	245
	■ 642	639	639	634	635	618	612	614	619	624
(m) D50	77,1	77,1	77,1	77,1	77,1	77,1	77,1	77,1	75,4	73,8
/P ₊ (m) D50	77,1	77,1	77,1	77,1	77,1	77,1	77,1	77,1	75,4	73,8

2,45 m - JM 850 - C50										
ΔVΔΔ (m)	35	40	45	50	55	60	65	70	75	80
(m)	81	84,3	84,3	84,3	82,7	82,7	82,7	79,3	82,7	81
/P ₊ (m)	81	82,7	82,7	82,7	79,3	77,7	79,3	77,7	82,7	79,3
	3,33 m	1	1	1	1	1	1	1	1	1
	1,9 m	1	1	1	1	1	1	1	1	1
	3,33 m	1	2	2	0	0	0	2	0	1
	5 m	13	13	13	14	14	14	12	14	13
F1 (t)	● 169	177	177	175	170	171	170	163	174	176
	■ 229	251	251	250	236	239	236	220	240	244
(m) D50	72,7	72,7	72,7	74,3	72,7	72,7	72,7	72,7	72,7	71
/P ₊ (m) D50	72,7	72,7	72,7	74,3	72,7	72,7	72,7	72,7	72,7	71

2,45 m - ZY 854 - C50										
ΔVΔΔ (m)	35	40	45	50	55	60	65	70	75	80
(m)	76,9	76,9	76,9	76,9	76,9	75,2	76,9	75,2	75,2	75,2
/P ₊ (m)	76,9	76,9	76,9	76,9	76,9	75,2	76,9	75,2	75,2	75,2
	3,33 m	1	1	1	1	1	1	1	1	1
	1,9 m	1	1	1	1	1	1	1	1	1
	3,33 m	2	2	2	2	0	2	0	0	0
	5 m	13	13	13	13	14	13	14	14	14
F1 (t)	● 206	208	209	208	212	201	210	201	201	211
	■ 277	276	277	276	280	259	280	259	262	281
(m) D50	65,2	65,2	65,2	65,2	66,9	66,9	66,9	66,9	66,9	65,2
/P ₊ (m) D50	65,2	65,2	65,2	65,2	66,9	66,9	66,9	66,9	66,9	65,2

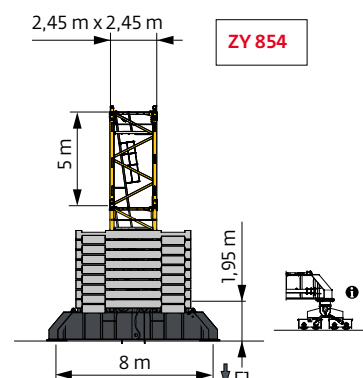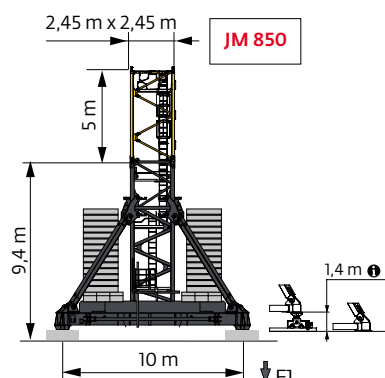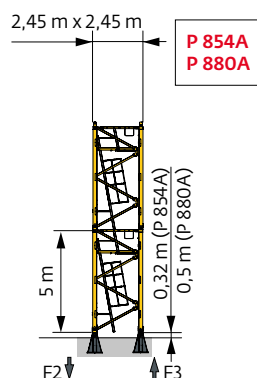

❗ Autres compositions de pylône - Nous consulter. / Andere Turmaufbauten - bitte kontaktieren Sie uns. / Other mast compositions - Please consult us. / Para otras composiciones de mástil - Por favor contáctenos. / Per altre composizioni torre, contattateci. / Para outras composições de coluna - Por favor, consulte-nos. / Для других композиций мачты пожалуйста консультируйтесь с нами.

Accès motorisés : compositions de mât, de lest de base et réactions adaptées. / Motorisierter Zugang vom : Mastzusammensetzung, Grundballast und Reaktionskräfte sind angepasst. / Motorized accesses: adapted mast composition, base ballast and reactions. / Accesso a cabina con elevador: Adaptación de composición de mástil, lastre de base y reacciones. / Accessi motorizzati: composizioni elementi torre, zavorre di base e reazioni aggiornate. / Acessos motorizados: composições de coluna, lastro da base e reacções adaptadas. / Лифты : адаптированная композиция мачты, базовый балласт и нагрузки.

Ancrages / Verankerungen / Anchorages / Anclajes / Ancoraggi
Ancoragem / якоря



Lest de base / Grundballast / Base ballast / Lastre de base / Zavorra di base
 Lastro da base / Базовый Балласт

⚖ (t) / □ 2,45 m - JM 850 - 📐 - C50										
ΔΔΔΔ (m)	35	40	45	50	55	60	65	70	75	80
84,3		192	192	180						
82,7		168	168	156	156	156	156		156	
81	168	156	156	144	144	144	144		144	168
79,3	156	144	144	132	132	132	120	120	120	144
74,3	108	108	108	96	84	84	84	84	84	96
69,3	72	72	60	60	48	48	48	48	48	60
64,3	60	48	48	48	48	48	48	48	48	48
↓ (m)										
59,3	48	48	48	48	48	48	48	48	48	48
54,3	48	48	48	48	48	48	48	48	48	48
49,3	48	48	48	48	48	48	48	48	48	48
44,3	48	48	48	48	48	48	48	48	48	48
39,3	48	48	48	48	48	48	48	48	48	48
34,3	48	48	48	48	48	48	48	48	48	48
29,3	48	48	48	48	48	48	48	48	48	48
24,3	48	48	48	48	48	48	48	48	48	48
19,3	48	48	48	48	48	48	48	48	48	48

⚖ (t) / □ 2,45 m - ZY 854 - 📐 - C50										
ΔΔΔΔ (m)	35	40	45	50	55	60	65	70	75	80
76,9	216	216	216	204	204		192			
75,2	192	180	180	180	168	168	168	156	168	192
70,2	144	132	132	132	120	120	120	120	120	132
65,2	108	96	96	84	84	84	84	84	84	96
60,2	96	84	84	72	72	72	72	84	84	84
55,2	72	72	72	72	72	72	72	72	84	84
↓ (m)										
50,2	72	72	72	72	72	72	72	72	72	84
45,2	72	72	72	72	72	72	72	72	72	84
40,2	72	72	72	72	72	72	72	72	72	72
35,2	72	72	72	72	72	72	72	72	72	72
30,2	72	72	72	72	72	72	72	72	72	72
25,2	72	72	72	72	72	72	72	72	72	72
20,2	72	72	72	72	72	72	72	72	72	72











Encombrenment et poids / Abmessungen und Gewicht / Dimensions and weight / Dimensiones y peso / Ingombro e peso
dimensões e pesos / габаритные размеры и вес








Partie tournante / Drehender Kranteil / Slewing crane part / Parte giratoria

Parte rotante / Parte rotativa / Поворотная часть : 80 m - 270 LVF

 x 14

 x 11

Partie tournante / Drehender Kranteil / Slewing crane part Parte giratoria / Parte rotante / Parte rotativa Поворотная часть		L (m)	l (m)	h (m)	kg (+/- 5%)
Contre-flèche / Gegenausleger Counter-jib / Contra-flecha Controbraccio / Contra-lança Контр-стрела		11,7 11,04	4,7 3,74	1,96 2,07	6600 4925
Porte-flèche / Auslegerträger Cathead / Porta-flecha Cuspide / Suporte de lança Оголовок		3,54	1,99	9,86	8265
Cabine / Kabine Cab / Cabina Cabina / Cabina Кабина	 Ultra View	5	2,5	2,77	1875
Pivot / Krankopf Towerhead / Pivote Portaralla / Pivot Секция поворотной части	 2,45 m	3,7	2,9	3,87	11560
Treuil de levage (+ câble) / Hubwerk (+ Seil) Hoisting winch (+ rope) / Mecanismo de elevación (+ cabo) Argano di sollevamento (+ fune) Guincho de elevação (+ cabo) Подъемная лебедка (+ канатом)	 270 LVF	5,09	2,3	2,24	9885
Châssis intermédiaire de treuil / Zwischenrahmen des Triebwerks Intermediate winch frame / Chassis intermedio del mecanismo Chassis intermedio / Chassis intermédio do guincho средняя часть рамы лебедки		3,26	2,89	1,66	5663
Elément de flèche / Auslegerement Jib section / Elemento de flecha Elemento di braccio / Elemento de lança Секция стрелы	 ① 15 DVF ② ③ ④ ⑤ ⑥	10,36 10,33 10,23 10,23 10,23 10,21	1,9 1,9 1,9 1,9 1,9 1,9	2,54 2,34 2,4 2,33 2,32 2,02	5100 5415 3010 2770 2850 1395
Elément de flèche / Auslegerement Jib section / Elemento de flecha Elemento di braccio / Elemento de lança Секция стрелы	 ⑥ ⑦ ⑧ ⑩	5,32 5,24 5,24 5,18	1,9 1,9 1,9 1,9	2,25 2,04 2,04 1,97	1915 1125 1005 550
Chariot / Laufkatze Trolley / Carrello Carro / Carro-distribuidor Тележка	 40 t	3,95	2,19	1,67	1420
Moufle / Hubflasche Pulley block / Aparejo Bozzello / Cadernal Полиспаст	 40 t	2,47	0,36	2,88	1837

Рүләне / Kranturm / Crane tower Mástil / Torre / Torre Башня крана			L (m)	I (m)	h (m)	kg (+/- 5%)
T 851		2,45 m	11,18	4,84	5,8	15750
K 85/K 85-2 Mât de télescopage / Teleskopiermast Telescoping mast / Tramo de telescopaje Elemento di telescopaggio / Tramo de Telescopagem Мачта для телескопирования		2,45 m	2,22	3,25	2,5	3600
KM 850.10B KM 850.14B KMT 850.10A KMT 850.14A K 88/K 85A2 KM 880.10A KMT 880.10A KMT 850.10C		2,45 m	10,32 10,32 5,32 5,32 5,32 5,41 5,41 3,65	2,54 2,54 2,54 2,54 2,51 2,53 2,53 2,54	2,51 2,51 2,51 2,51 2,51 2,53 2,62 2,51	10070 11190 5450 5990 8290 8370 8700 4230
Pieds de scellement / Verankerungsfüße Fixing angles / Pie de empotramiento Montante da annegare / Angulos fixadores анкера		P 854A P 880A	0,9 1	0,9 1	1,5 1,87	940 1605
Croix centrale (position transport) / Zentralkreuz (Transport- position) / Central cross (transport position) / Brazo central (posición transporte) / Croce centrale (posizione di trasporto) Braço central chassis (posição transporte) / крестообразное основание (транспортное положение)		JM 850	5,2	1,7	1,5	6700
Mât-châssis / Grundmasteinheit Basic mast unit / Tramo-chasis Elemento base / Tramo-chassis Мачта для крепления к шасси		JM 850	8,75	2,5	2,5	14600
Bras de châssis / Unterwagenträger / Chassis girder / Brazo de base en cruz / Traverse del carro / Braço de chassis / опорная балка шасси		JM 850	5,2	0,9	1,55	3200
Tirant de châssis / Unterwagenstreben / Chassis ties / Tirante de base en cruz / Tiranti del carro / Tirante de chassis / тяга крепления шасси		JM 850	7,2	0,25	0,35	250
Haubans / Mastabstützungen Struts / Tornapuntas Puntoni / Escoras Растяжка		JM 850	8,2	0,75	1,3	2300
1/2 Bras de croix / 1/2 Fundamentkreuzträger 1/2 Cross girder / 1/2 Brazo en cruz 1/2 Braccio croce / 1/2 Braço da cruz 1/2 Поперечная балка		ZY 854	5,7	0,98	2,27	6430
Bras de croix / Fundamentkreuzträger Cross girder / Brazo en cruz Braccio croce / Braço da cruz Поперечная балка		ZY 854	11,9	1,42	2,27	14000

Mécanismes / Triebwerke / Mechanisms / Mecanismos / Meccanismi
Mecanismos / Механизмы

400 V - 50 Hz													ch - PS hp	kW	
	270 LVF 100 Optima	m/min t	51 20	66,5 15	96 10	139 5	162 3,5	25,5 40	33,5 30	49 20	71 10	81 8	270	200	532 m
	15 DVF 16 Optima	m/min	0 → 33 (40 t) 0 → 50 (20 t) 0 → 67 (10 t) 0 → 100 (2,5 t)										15	11	
	RVF 173 Optima+	tr/min U/min rpm	0 → 0,7										3 x 10	3 x 7,5	
															

	IEC 60204-32	
400 V (+10% -10%) 50 Hz	257 → 149 kVA	

	FR	DE	EN	ES	IT	PT	RU
	Profil de vent suivant EN 14439 C50-D50	Windbedingungen gemäss EN 14439 C50-D50	Wind conditions according to EN 14439 C50-D50	Conformidad de los condiciones de viento EN 14439 C50-D50	Condizioni del vento secondo EN 14439 C50-D50	Perfil de vento conforme EN 14439 C50-D50	Ветровой режим в соответствии с EN 14439 C50-D50
	Équipements standards	Standardausrüstungen	Standard equipment	Equipamiento de serie	Equipaggiamento standard	Equipamento de série	Стандартное оборудование
	Équipements optionnels	Sonderausrüstungen	Options	Equipamiento opcional	Equipaggiamento in opzione	Equipamento opcional	Дополнительное оборудование (опция)
	Fonction Potain Plus : Courbes de charges Plus	Funktion Potain Plus: Plus-Lastkurven	Potain Plus function: Plus load curves	Función Potain Plus: Diagrama de cargas Plus	Funzione Potain Plus: Curve di carico Plus	Função Potain Plus: Diagrama de cargas Plus	Функция контроля мощности Potain Plus: Диаграммы грузоподъемности Plus
	Hauteurs sous crochet associées aux courbes de charges Plus	Hakenhöhen mit Plus-Lastkurven	Hook heights with Plus load curves	Altura bajo gancho, usando el diagrama de cargas Plus	Altezze sotto gancio con curve di carico Plus	Altura livre, utilizando o diagrama de cargas Plus	Высота под крюком для диаграмм грузоподъемности Plus
	Réactions en service	Reaktionskräfte in Betrieb	Reactions in service	Reacciones en servicio	Reazioni in servizio	Reacções em serviço	Реакция при работе
	Réactions hors service	Reaktionskräfte außer Betrieb	Reactions out of service	Reacciones fuera de servicio	Reazioni fuori servizio	Reacções fora de serviço	Реакция в покое
	Poids total du lest	Ballast-Gesamtgewicht	Total ballast weight	Peso total del lastre	Peso totale della zavorra	Peso total do lastro	Общий вес балласта
	Poids de flèche	Auslegergewicht	Jib weight	Peso de flecha	Peso del braccio	Peso da lança	вес стрелы
	Camion 13,4 m	Lkw 13,4 m	Lorry 13,4 m	Camión 13,4 m	Camion 13,4 m	Camião 13,4 m	Резусовой автомобиль 13,4 м
	Conteneur High Cube 40', et/ou Flat Rack 20'	Container High Cube 40', und/oder Flat Rack 20'	Container High Cube 40', and/or Flat Rack 20'	Contenedor High Cube 40', y/o Flat Rack 20'	Container High Cube 40', e/o Flat Rack 20'	Contentor High Cube 40', e/ou Flat Rack 20'	40-футовый контейнер повышенной вместимости High Cube, и/или 20-футовая открытая платформа Flat Rack
	Levage	Heben	Hoisting	Elevación	Sollevamento	Elevação	Подъем
	Distribution	Katzfahren	Trolleying	Distribución	Ditribuzione	Distribuição	Перемещение по стреле
	Orientation	Schwenken	Slewing	Orientación	Rotazione	Rotação	Поворот
	Translation	Kranfahren	Travelling	Traslación	Traslazione	Translação	Перемещение крана
	Puissance requise	Erforderliche Leistung	Required power	Potencia Necesaria	Potenza richiesta	Potência Necessária	Потребляемая мощность
	Fonction Power Control : vitesses treuils adaptées à la puissance disponible	Funktion Power Control: Geschwindigkeiten der Triebwerke werden an die verfügbare Leistung angepasst	Power Control Function: winch speeds adapted to the available power	Función Power Control: marchas de los cabrestantes adaptadas a la potencia disponible	Funzione Power Control: velocità degli argani adattate alla potenza disponibile	Função Power Control: velocidades de guincho adaptadas à potência disponível	Функция контроля мощности Power Control: регулировка скорости лебедок в зависимости от доступной мощности
	Nous consulter	Auf Anfrage	Consult us	Consultarnos	Consultateci	Consultar-nos	Проконсультируйтесь у нас
	Document commercial non contractuel. Pour toute information technique se référer à la notice correspondante.	Unverbindliches Vertriebsdokument. Für technische Informationen, siehe die entsprechenden Anweisungen.	This commercial document is not legally binding. For any technical information, please refer to the corresponding instructions.	Documento comercial no contractual. Para cualquier información técnica, ver la noticia correspondiente.	Documento commerciale non vincolante, per tutte le informazioni tecniche fare riferimento al catalogo istruzioni.	Documento comercial não contratual. Para qualquer informação técnica complementar consultar as respectivas instruções.	Этот коммерческий документ не является юридически обязательным. Для получения технической информации, см. соответствующие инструкции.