








MC 系列

MC 320A K12

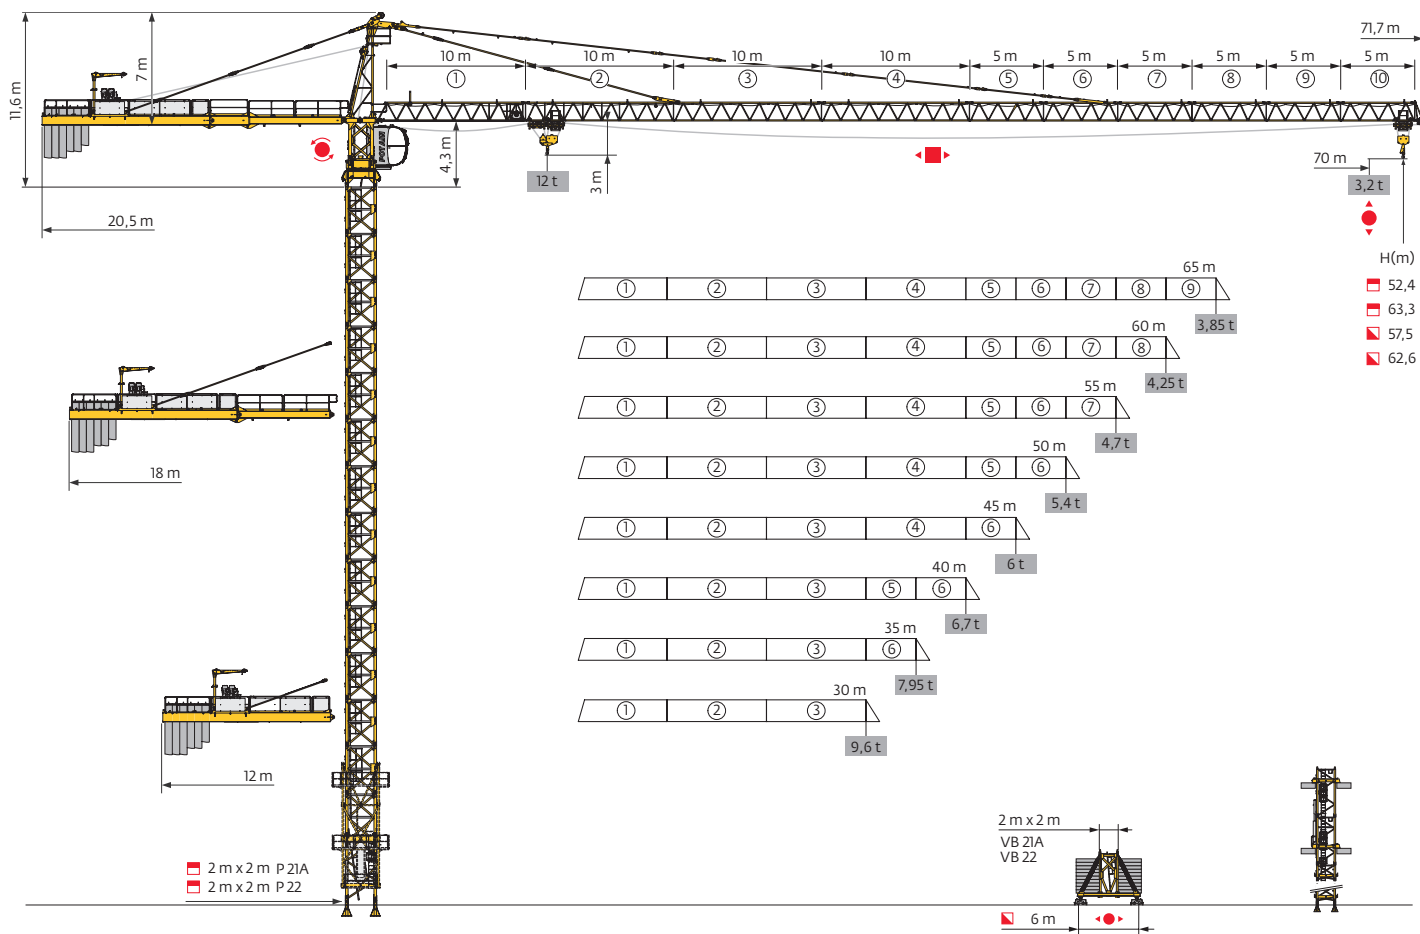


塔身组成 - 反力



□ 2 m
 ▲ 30 m → 70 m

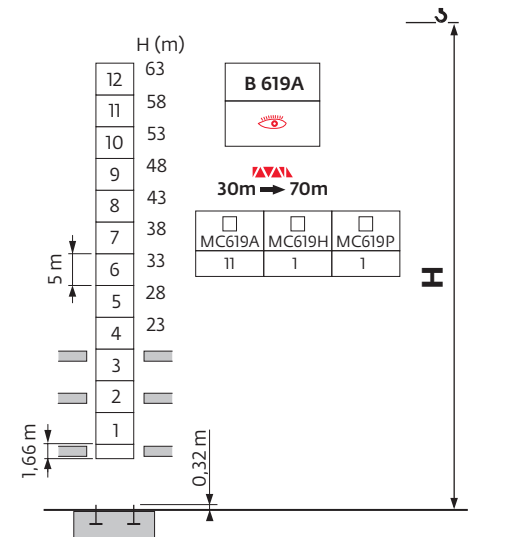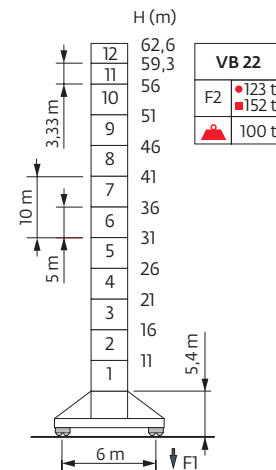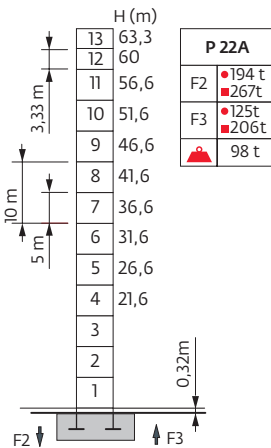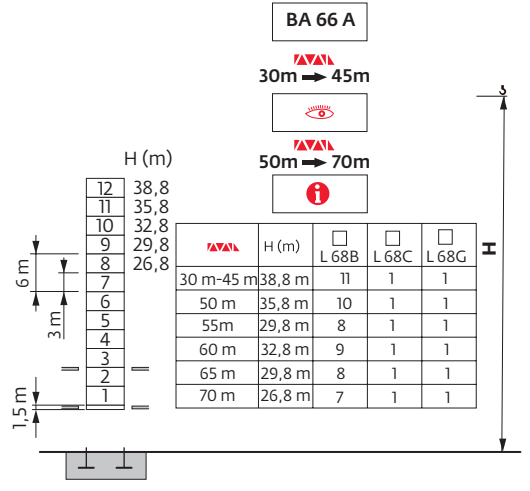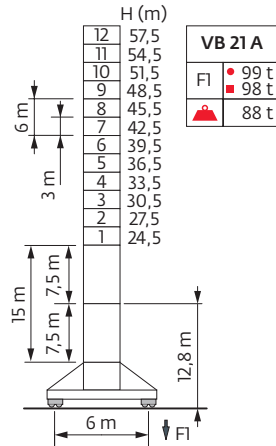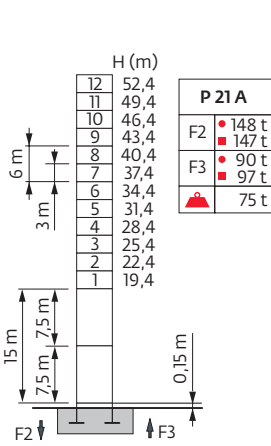

内爬塔机

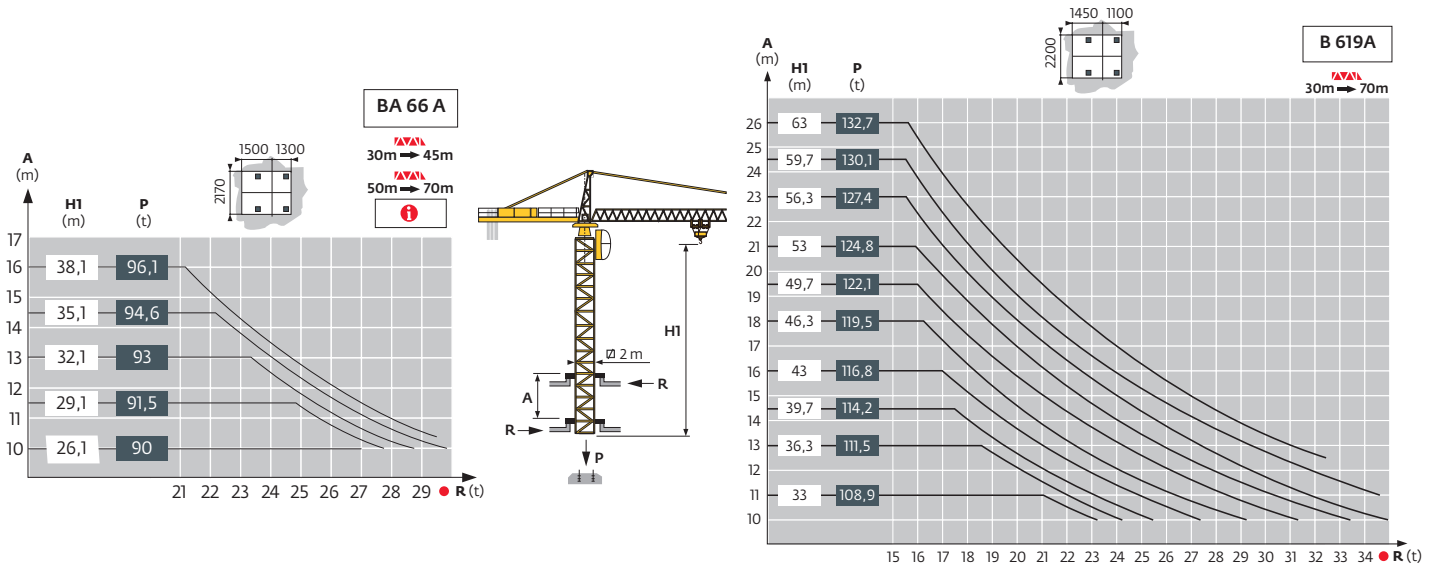


附着

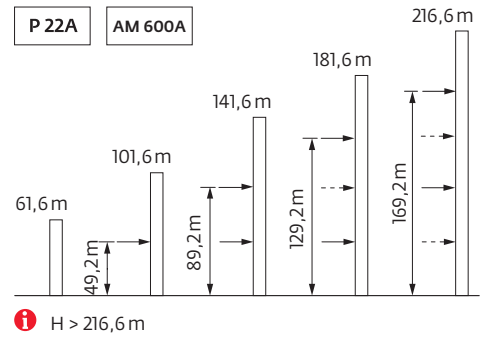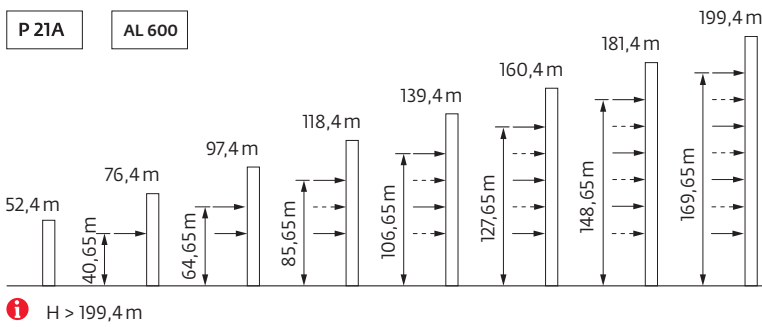

负荷曲线



70 m	3,1	▶	21,4	22	25	27	30	32	35	37	37,4	41,9	45	47	50	52	55	57	60	62	65	67	70	m
▲▲▲▲			12	11,6	10	9,1	8	7,3	6,5	6,1	6	6	5,5	5,2	4,9	4,6	4,3	4,2	3,9	3,7	3,5	3,4	3,2	t
65 m	3,1	▶	22,8	25	27	30	32	35	37	39	40,4	44,7	47	50	52	55	57	60	62	65				m
▲▲▲▲			12	10,8	9,8	8,7	8	7,2	6,7	6,3	6	6	5,7	5,3	5	4,7	4,5	4,2	4,1	3,85				t
60 m	3,1	▶	22,8	25	27	30	32	35	37	39	40,4	44,7	47	50	52	55	57	60						m
▲▲▲▲			12	10,8	9,8	8,7	8	7,2	6,7	6,3	6	6	5,7	5,3	5	4,7	4,5	4,25						t
55 m	3,1	▶	22,8	25	27	30	32	35	37	39	40,4	44,7	47	50	52	55								m
▲▲▲▲			12	10,8	9,8	8,7	8	7,2	6,7	6,3	6	6	5,7	5,3	5	4,7								t
50 m	3,1	▶	23,3	25	27	30	32	35	37	40	41,2	45,7	47	50										m
▲▲▲▲			12	11,1	10,1	8,9	8,2	7,4	6,9	6,2	6	6	5,8	5,4										t
45 m	3,1	▶	23,8	25	27	30	32	35	37	40	42	45												m
▲▲▲▲			12	11,3	10,3	9,1	8,4	7,6	7,1	6,4	6	6												t
40 m	3,1	▶	24,7	25	27	30	32	35	37	40														m
▲▲▲▲			12	11,8	10,8	9,5	8,8	7,9	7,4	6,7														t
35 m	3,1	▶	24,8	25	27	30	32	35																m
▲▲▲▲			12	11,9	10,8	9,6	8,9	7,95																t
30 m	3,1	▶	24,9	25	27	30																		m
▲▲▲▲			12	11,9	10,9	9,6																		t




压重

2 m	VB 21 A	H (m)	57,5	54,5	51,5	48,5	45,5	42,5	39,5	36,5	33,5	30,5	27,5	24,5	21,5
	◀●▶	⚖️ (t)	84	72	72	72	72	72	72	60	60	60	60	60	60
	VB 22	H (m)	62,6	59,3	56	51	46	41	36	31	26	21	16	11	
	◀●▶	⚖️ (t)	132	108	96	72	72	72	72	72	72	72	72	72	


起重臂重量&平衡臂配重

			75 LVF / 70 RCS						
臂长	吊钩	平衡臂	4600 kg	4200 kg	2300 kg	⚖️ (kg)	4200 kg	700 kg	⚖️ (kg)
70 m	11630	12555	3	2	1	24 500	5	5	24 500
65 m	11345	12270	1	4	1	23 700	5	4	23 700
60 m	10950	11875	2	3	0	21 800	5	1	21 700
55 m	10400	11325	4	1	1	24 900	5	5	24 500
50 m	9665	10590	4	1	0	22 600	5	2	22 400
45 m	8915	9840	1	3	1	19 500	4	3	18 900
40 m	8270	9195	1	3	0	17 200	4	0	16 800
35 m	7520	8445	0	3	1	14 900	3	2	14 000
30 m	6740	7665	4	0	1	20 700	4	5	20 300


CU - 4600 kg




CA - 4200 kg



CS - 2300 kg




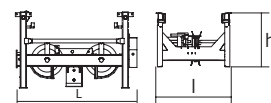

























CB - 700 kg












尺寸重量表



塔机回转部分 :  70 m -  -  75 LVF

塔机回转部分		L (m)	I (m)	h (m)	kg (+/- 5%)	
平衡臂		6,39	1,5	1,86	1565	
		2,7	1,52	1,93	985	
		11,1	2,09	2	4190	
塔帽		3,42	2,1	9,55	5530	
驾驶室	V140S 太空舱	3,4	1,9	2,57	1130	
回转机构	RVF 162	3,12	2,5	2,75	5805	
起升机构		75 LVF 30	2,48	1,63	1,4	2055
		70 RCS 30	2,22	1,68	1,98	1795
起重臂根部节	① 6D3V4	10,17	1,9	2,09	2660	
起重臂节		②	10,17	1,38	1,45	1790
		③	10,14	1,38	1,45	1665
		④	10,27	1,38	1,18	1395
起重臂节		⑤	5,27	1,38	1,3	750
		⑥	5,14	1,38	1,18	780
		⑦	5,13	1,38	1,18	735
		⑧	5,2	1,38	1,2	550
		⑨	5,16	1,38	1,11	395
		⑩	5,2	1,38	1,2	285
后小车	 12t	1,72	1,72	0,99	350	


塔机回转部分		L (m)	I (m)	h (m)	kg (+/- 5%)		
前小车		12t 3,37	1,72	0,99	700		
		6t 1,8	1,72	0,99	350		
吊钩		12t 1,65	0,25	1,77	500		
		6t 1,09	0,23	1,99	275		
顶升装置							
顶升套架		P21A	7,26	3,78	3,98	5195	
		P22A	11,5	4,21	4,36	8235	
塔身节							
S 68 J SR 68J			7,74 7,74	2,1 2,1	2,1 2,1	4170 5175	
	L 68 B3			3,26	2,12	2,12	1530
M 619 A		□ 2 m	5,32	2,13	2,13	3517	
		A	-	-	-	47	
		B	-	-	-	55	
		C	-	-	-	122	
		D	-	-	-	165	
		E	-	-	-	148	
M 619 C		□ 2 m	3,66	2,13	2,13	2492	
		A	-	-	-	29	
		B	-	-	-	41	
		C	-	-	-	98	
		D	-	-	-	140	
		E	-	-	-	138	
塔机底座							
固定支脚		P21 A R21 A	1,31 0,8	0,8 0,6	0,8 0,6	500 200	
		P22 A R22 A	1,35 0,82	0,65 0,65	0,65 0,65	390 325	
	行走基节		VB 21 A	5,01	2,41	2,41	4390
			VB 22	5,01	2,41	2,41	4720
斜撑		VB 21 A	4,51	0,29	0,29	420	
		VB 22	4,51	0,29	0,29	420	
底架		VB 21 A	6,7	0,7	2,31	1600	
		VB 22	6,7	0,7	2,31	1600	









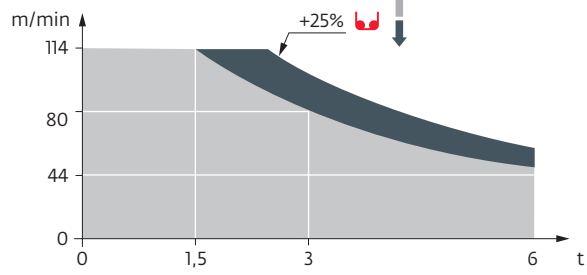







机构


380 V - 50 Hz											hp	kW		
	70 RCS 30	m/min t	0 → 40 6		0 → 80 3		0 → 20 12		0 → 40 6		70	51	523 m	
	75 LVF 30 Optima	m/min t	44 6	56 4,5	80 3	116 1,5	22 12	28 9	40 6	58 3	75	55	570 m	
	6 D3 V4	m/min	10 → 50 (12 t) → 100 (6 t)									6	4,4	
	RVF 162 Optima+	tr/min U/min rpm	0 → 0,7									2 x 7,5	2 x 5,5	
  	VB 21 A VB 22 RT 544 A1 - 2V R ≥ 13 m	m/min	13,5 → 27									4 x 7	4 x 5,2	

CEI 38  IEC 38	 kVA
380 V (+10% -10%) 50 Hz	70 RCS : 74 kVA 75 LVF : 78 kVA

75 LVF 30 Optima



-  上绕度
-  工作状态下的反力
-  非工作状态下的反力
-  起重机在无载荷、无配重、独立高度状态下的压重
-  总配重
-  13, 4m卡车
-  40"立方集装箱
-  坚固的附着框
-  松开的附着框
-  起升
-  变幅
-  回转
-  行走
-  额定功率
-  参阅内爬
-  联系我们

 此商业文件不承担法律责任，对于任何技术信息，请查阅相应说明书。



马尼托瓦克起重设备（中国）有限公司

工厂地址：江苏省张家港市经济开发区（南）区金塘路55号
 市场总部：上海市漕溪北路333号中金国际广场B座1103-1105室
 总机：021-6457 0066
 传真：021-6457 4985
 邮编：200030

