



Hup 32-27

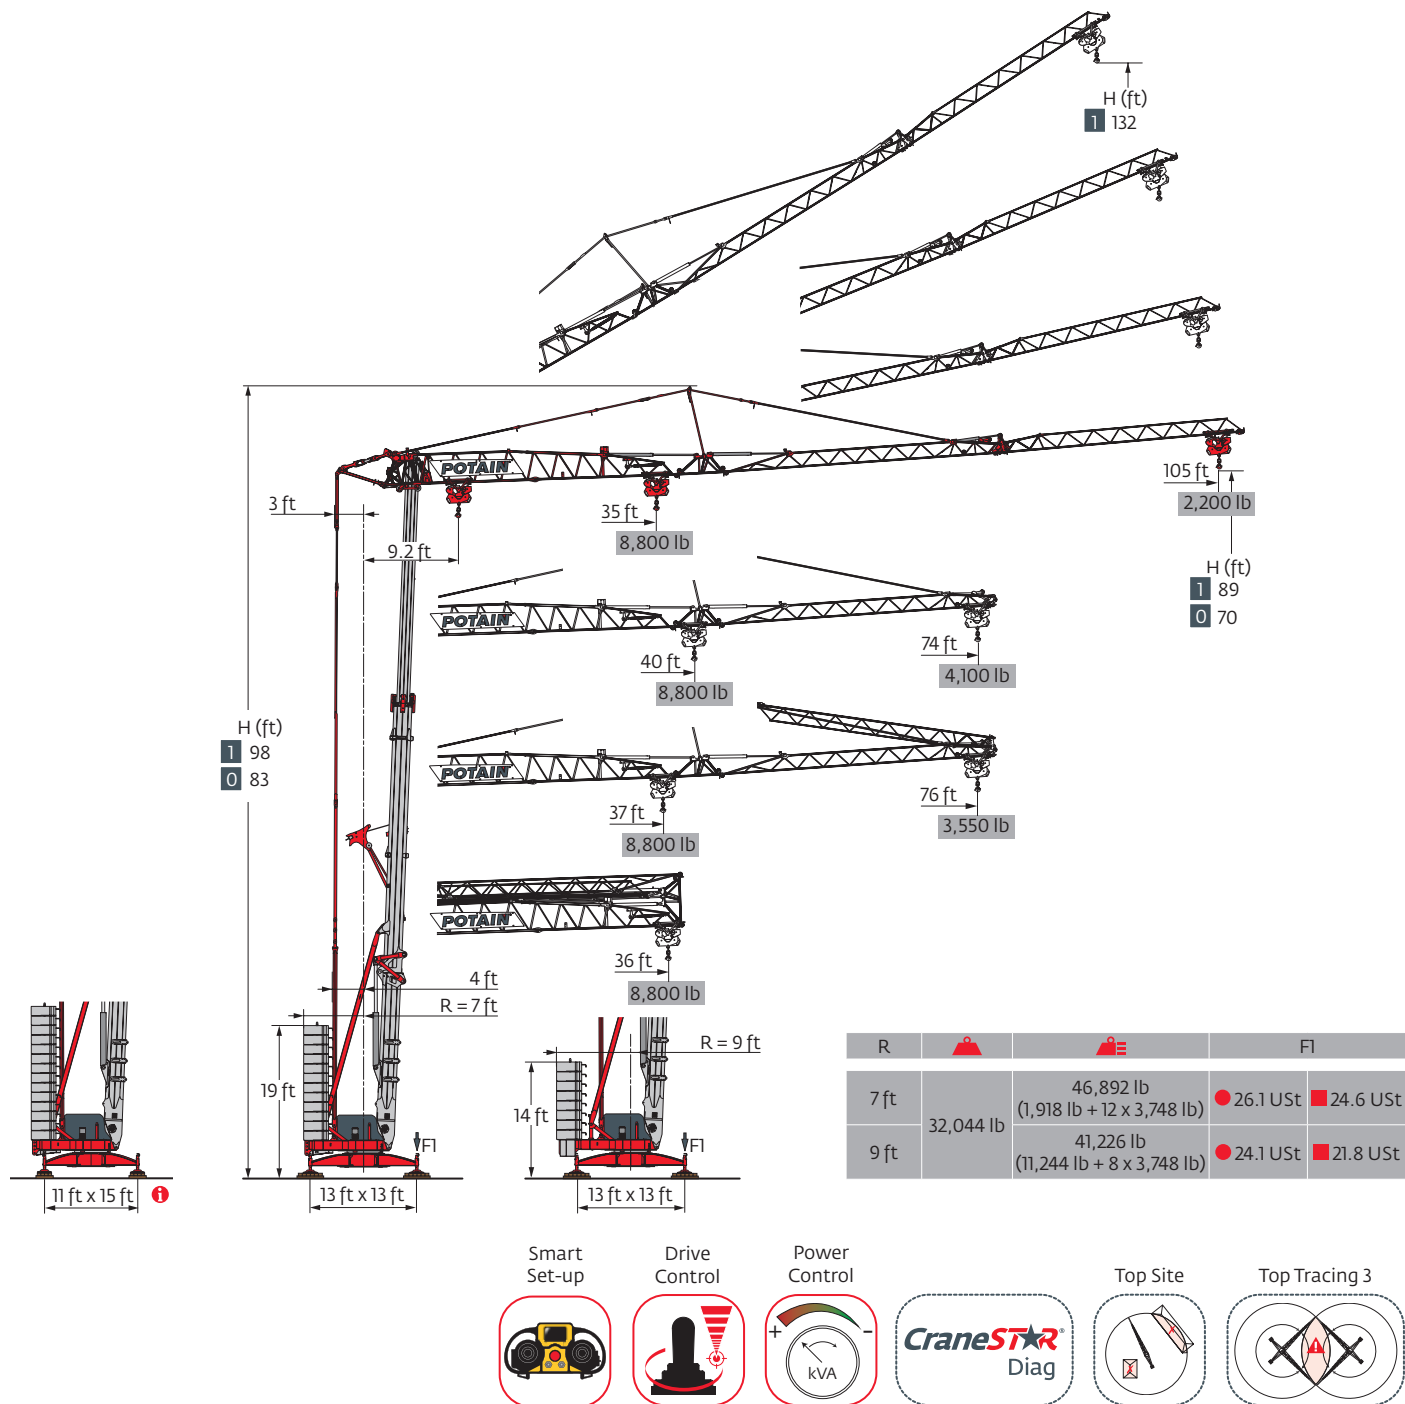

Load curves

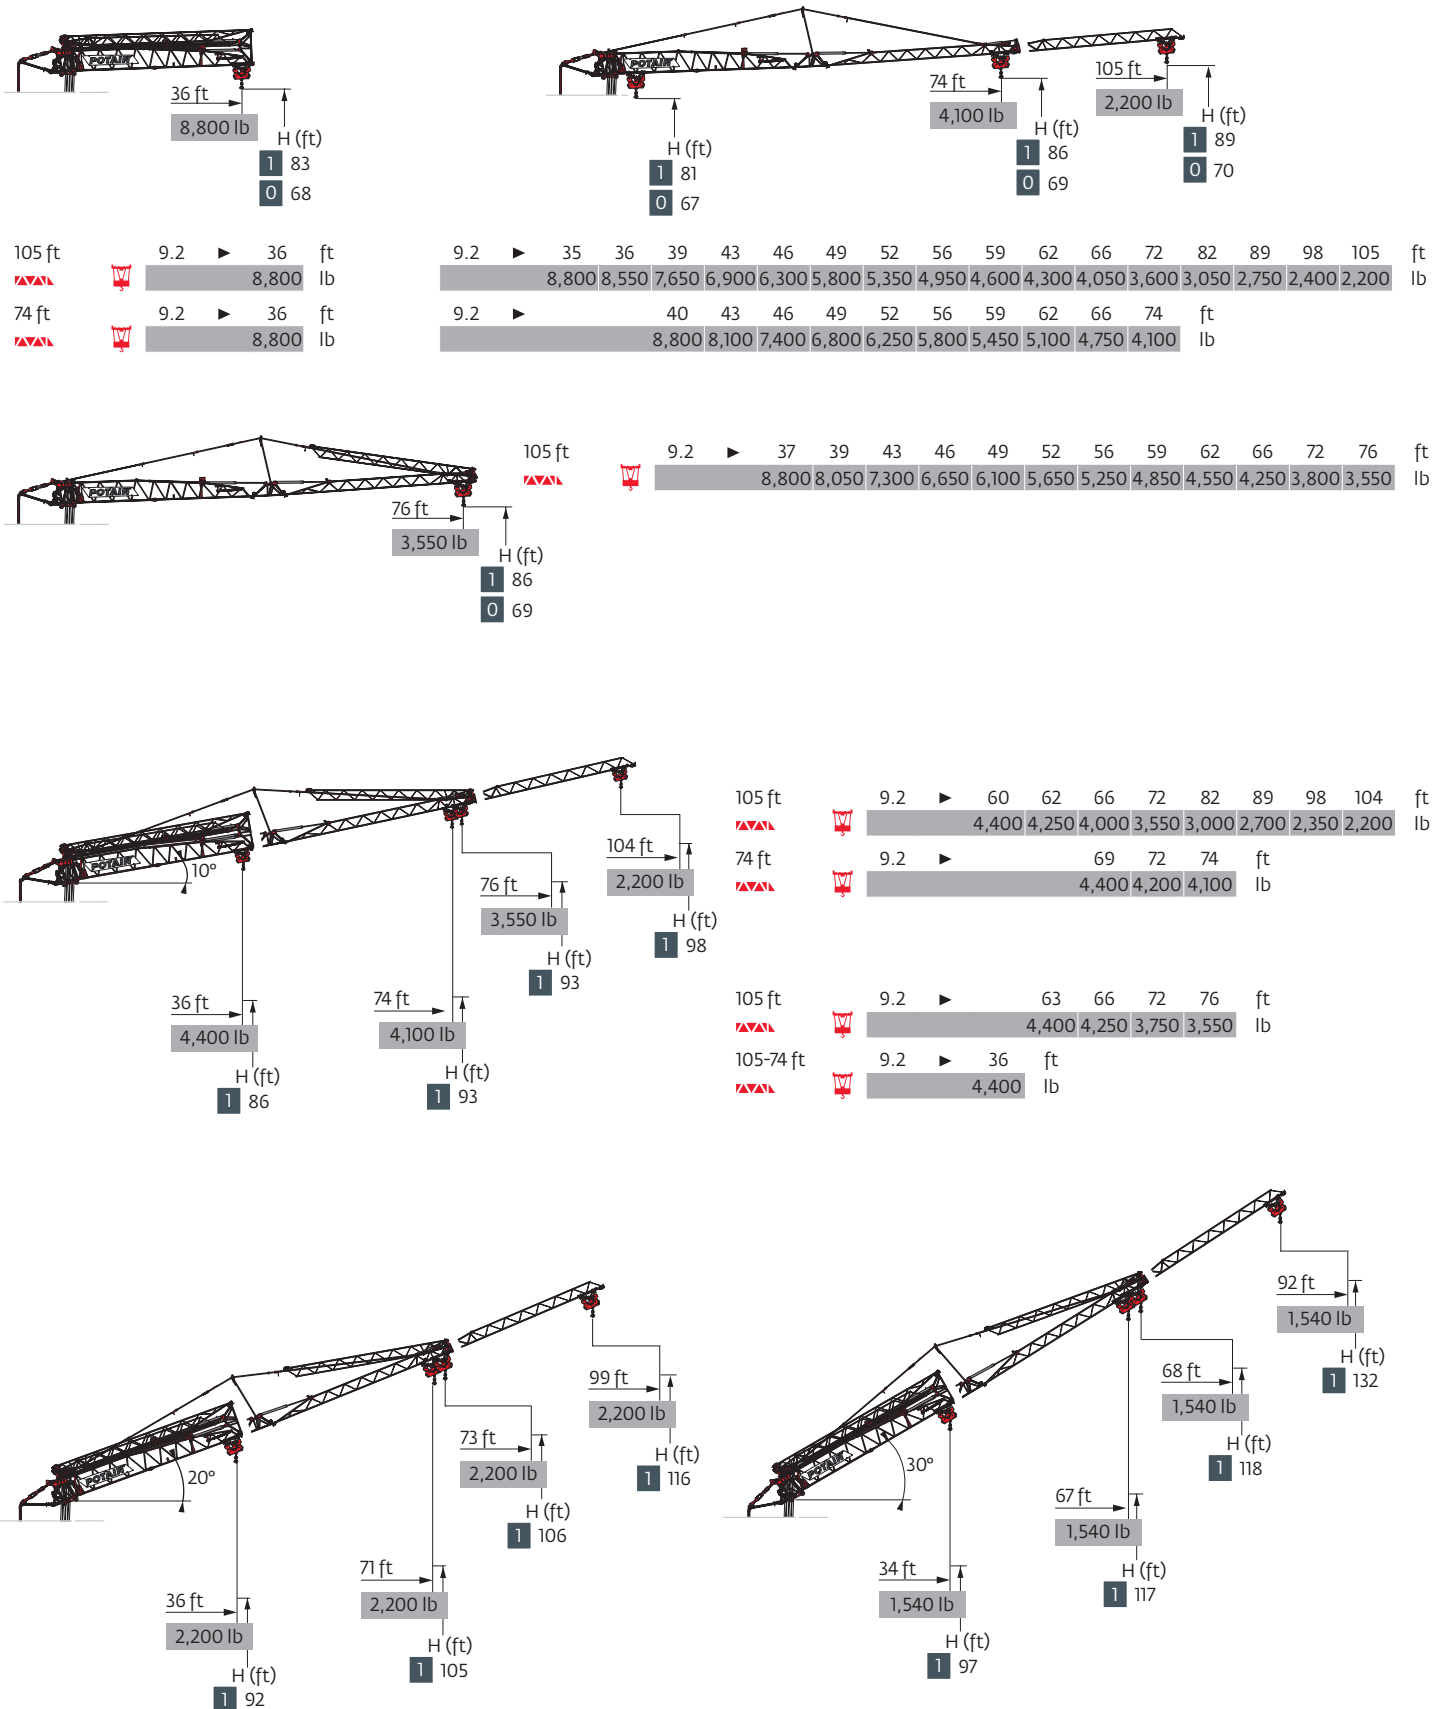


Mechanisms

480 V - 60 Hz								hp	kW
	18 HPL™ 10	fpm	6	62	118	190	213	18	13
		lb	8,800	8,800	4,400	2,200	1,100		
	3 DVF 5	fpm	3 → 148 (0 → 2,200 lb) 3 → 135 (2,200 lb → 8,800 lb)					3	2.2
	HPS 141	rpm	0 → 0.9					5	3.7


 IEC 60204-32	
480 V (+6% -10%) 60 Hz	19 → 13 kVA
	

Erection

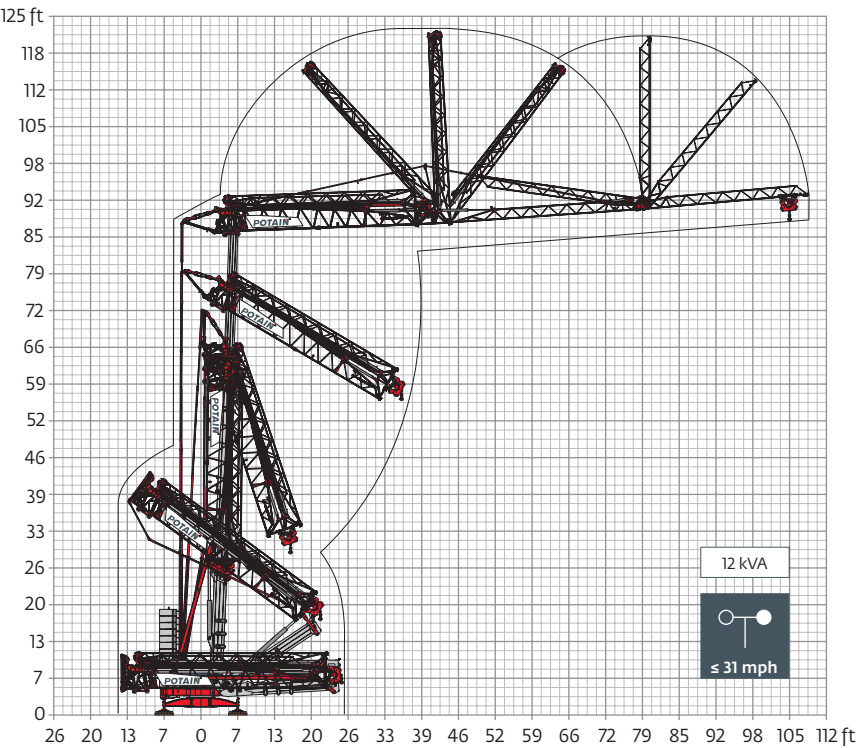


Transport


DS62/S120 - 6 mph

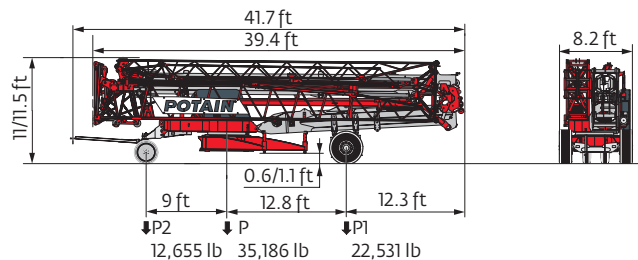


DJ105/S125 - 15.5 mph

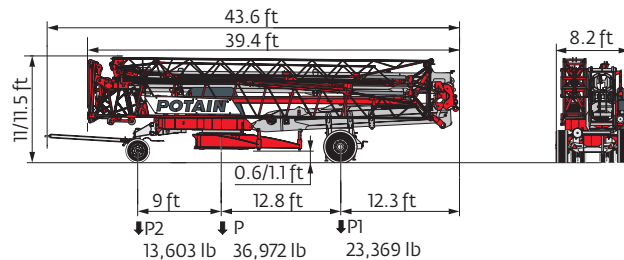

DJ126M/S125 - 15.5 mph

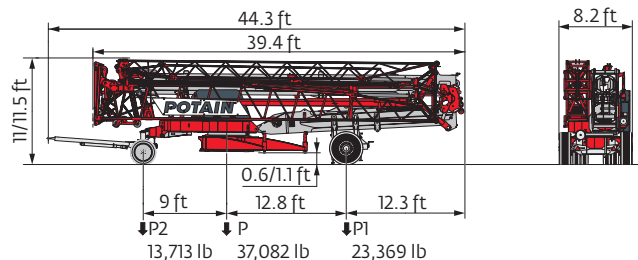

North America Highway Axle

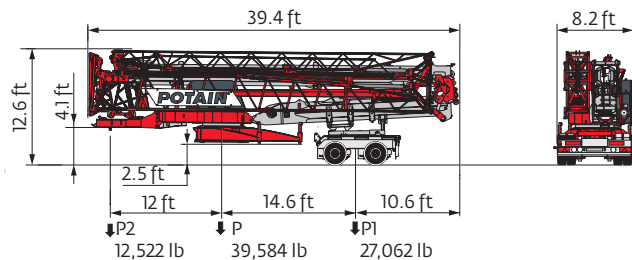

Container 40' Open Top High Cube



- | | |
|--|--------------------|
| R Rear slewing radius | Standard equipment |
| Consult us | Options |
| Reactions in service | Hoisting |
| Reactions out of service | Trolleying |
| Weight without load, without ballast, without transport axles, with max. jib and standard height | Slewing |
| Total ballast weight | Required power |

Power Control Function: winch speeds adapted to the available power



Hook heights given with plated pulley block

This commercial document is not legally binding

For any technical information, please refer to the corresponding instructions

