



Lift Solutions

Lattice-boom crawler cranes

Manitowoc[®]





Manitowoc Cranes Lift Solutions Team is a group of sales, engineering, purchasing and operations professionals dedicated to helping customers with unique applications for lattice crawler product. Whether your requirement is for a new or 40-year-old product, the Lift Solutions Team is your answer.

WHAT IS A LIFT SOLUTION?

> IS

- New application
- Customization of existing product
- Approval
- Customer supplied attachment
- Special Lift
- Travel
- Wind
- Liftplan/erection procedure
- Custom load chart
- Accident investigation support
- Structural modification

> IS NOT

- Structural repair (contact Crane Care)
- Obsolete part for current or past production model (contact Crane Care)
- New serial numbered attachment

Manitowoc knows that not every job is the same and neither is every crane. The Lift Solutions Team will configure your crane to exact requirements, making your Manitowoc crane the perfect tool for your job.

The following pages detail previous Lift Solutions. If you would like to discuss an application you see here, a modification to what is shown, or a new customization, contact your local dealer or the Lift Solutions Team directly at:

(920) 683-6639

or

steven.blattler@manitowoc.com



Contents

Approval letters.....	3	Personnel handling	27
Barge tie-downs	4	Pile lead adapter	28
Boom rollers	5	Public Address (PA) system	29
Cameras	6	Rated Capacity Limiter, external display.....	30
Clamshell package	7	Rated Capacity Limiter, light bar	31
Collector ring	8	Rope guards	32
Counterweight	9	Set-up remote control	33
Custom capacity chart	10	Spark arrestor	34
Detachable upper boom point.....	11	Swing limiter	35
Emergency backup power	12	Tagline	36
Generator assembly	13	Walkways, carbody	37
Horn, compressed air	14	Walkways, rotating bed	38
Hydraulic equipment/attachments	15	Wind speed alarm	39
Lifting arrangement	16		
Lift plan/erection procedure	17		
Lights, boom position	18		
Lights, boom	19		
Lights, rotating bed	20		
Lights, service	21		
Load block/weight ball	22		
Mast lay down	23		
Operator's cab, elevated	24		
Operator's cab, multi-position	25		
Pedals, travel	26		

Approval letters

> Letters approving special lifts, wind conditions, rigging, travel, or customer supplied equipment
Examples of the different types of letters are:

- Approval for Maximum Operating Wind Speed
- Approval to add/attach customer supplied equipment
- Approval for special lifts
- Deviation Approval Letter – capacity, rigging, reeving, raising, travel, wind conditions, erection or operation procedure, etc.



Existing models


All

Notes

For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Barge tie-downs

- Barge tie-downs consist of locations, components and suggested methods of securing the crane to the barge.

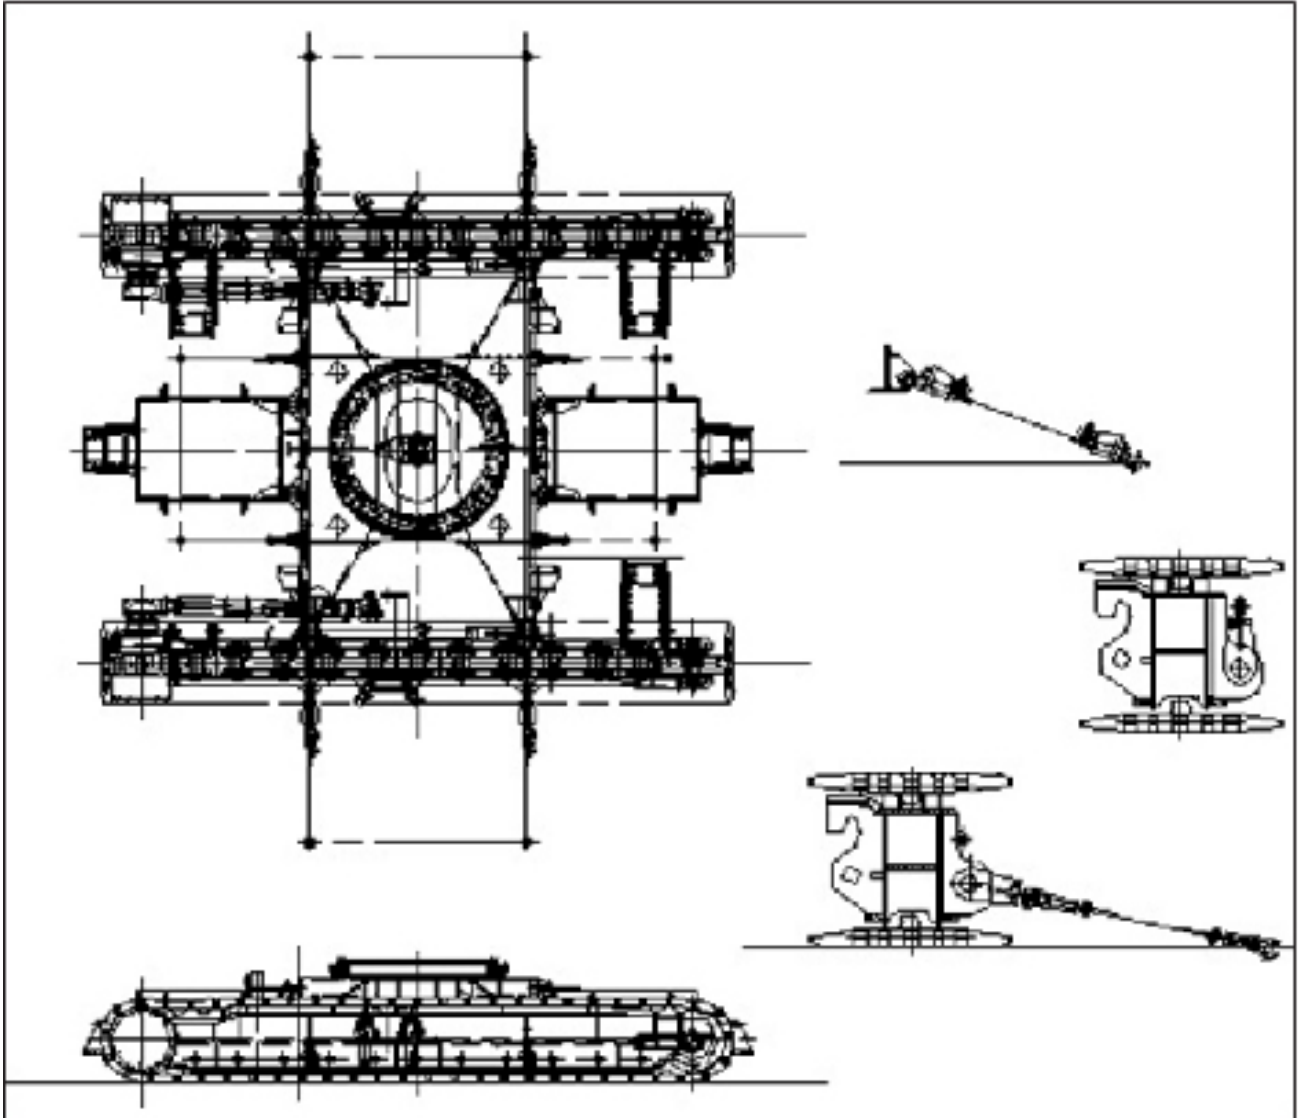

Existing models


777, 999, 16000, 4100W

Notes

A barge mounted crane is positively secured to prevent shifting and is subjected to tipping. When not working, crane carbody is anchored with tie-downs to the barge. For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Boom rollers

- Boom rollers are designed to keep hoist rope from rubbing lacings on boom. Consist of brackets, bearings, roller and hardware.

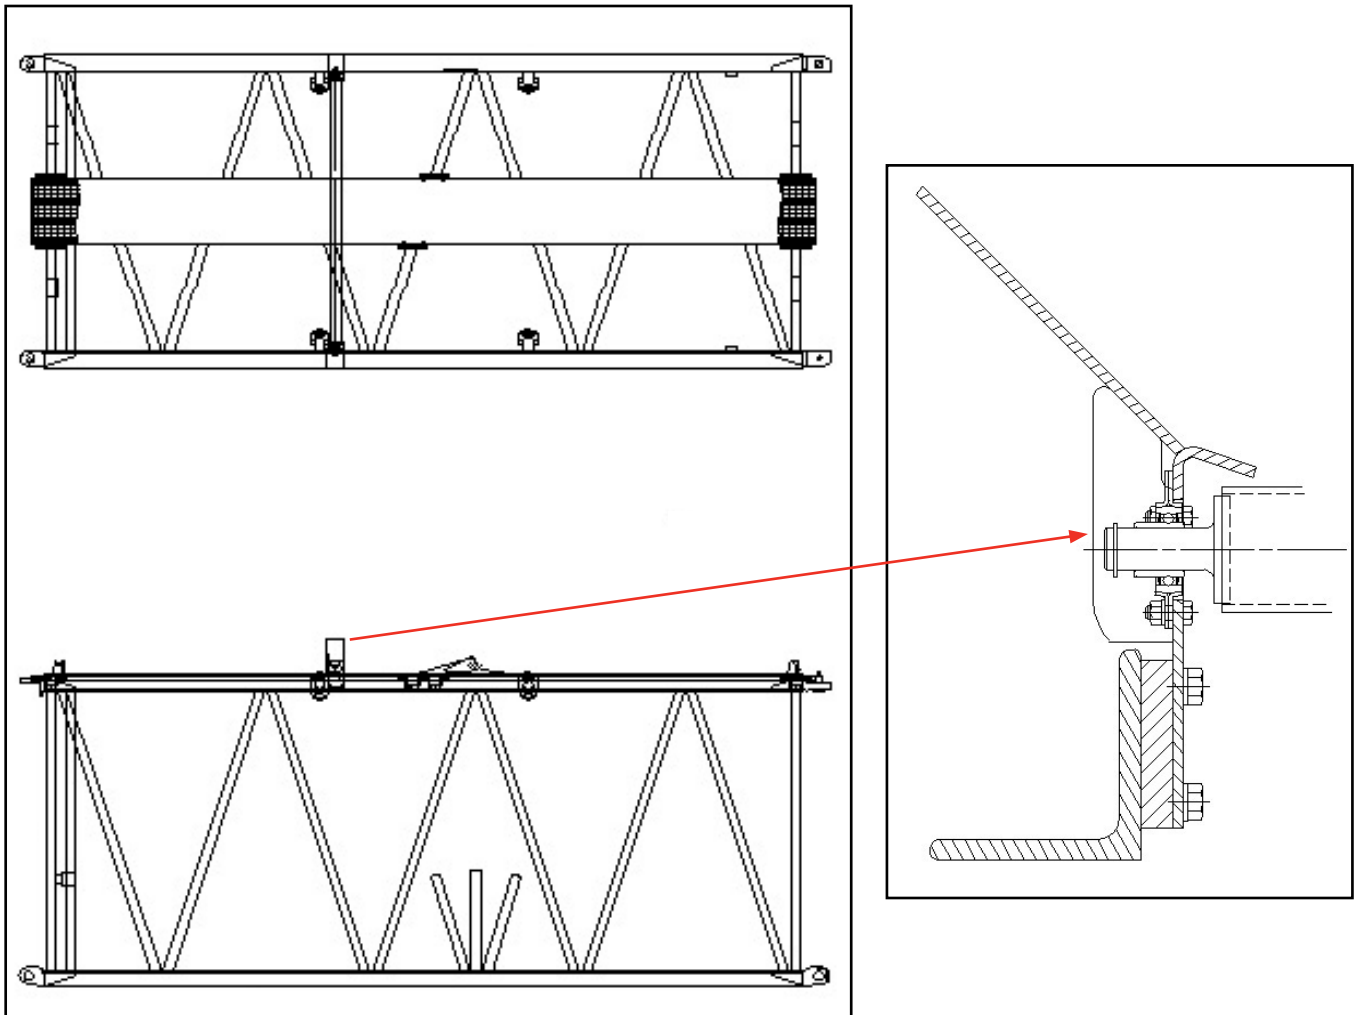

Existing models


888, 999

Notes

For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Cameras

- Cameras allow the operator to view drums, load block from boom point, sides and rear of crane. Camera system consists of multiple camera/light combination units displayed on single or multiple CCTV screens in the operator's cab.

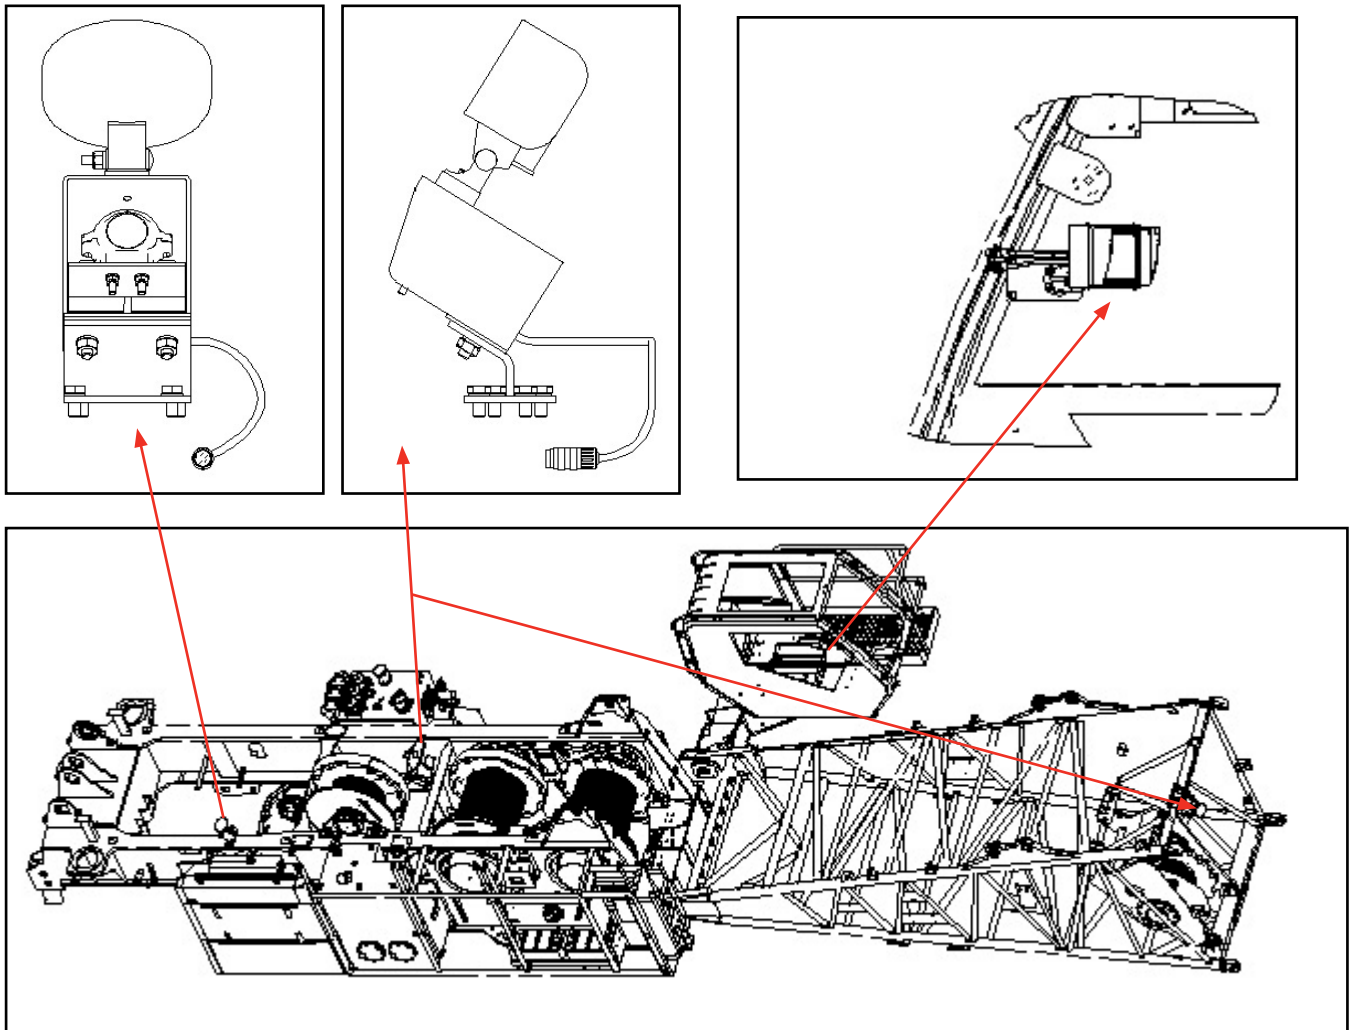

Existing models




2250, 16000, 18000, 21000

Notes

For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Clamshell package

- Clamshell package allows the operator to use a bucket or grab to re-handle product. Consists of pressure rollers for front and rear drum, tagline, wire rope guards, capacity chart and programming.

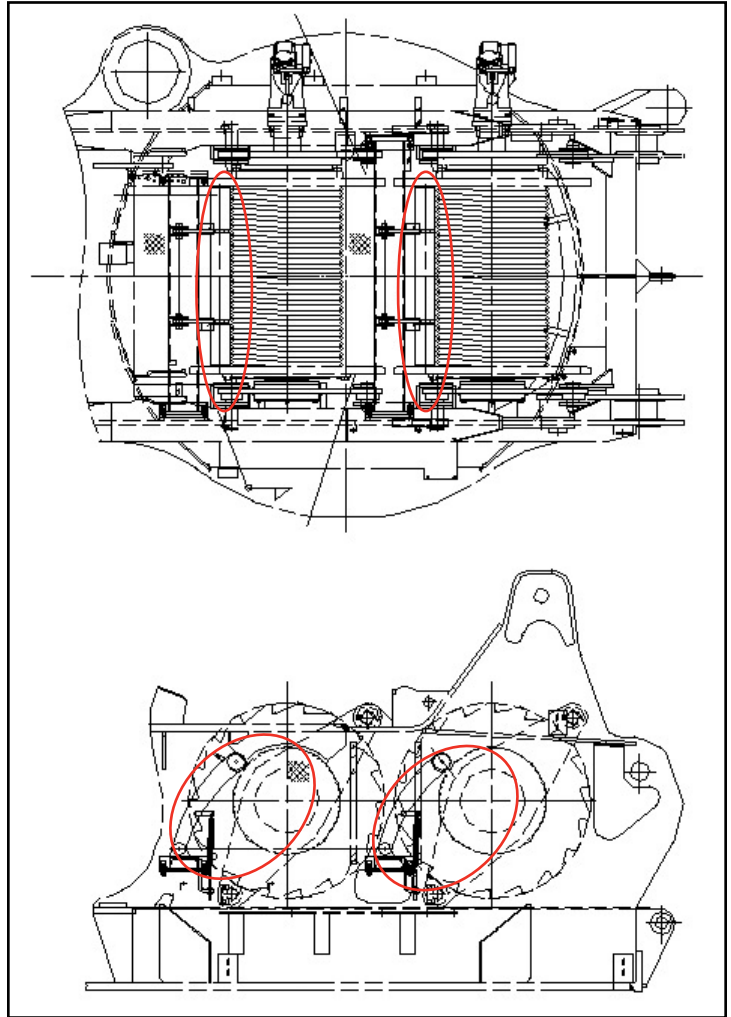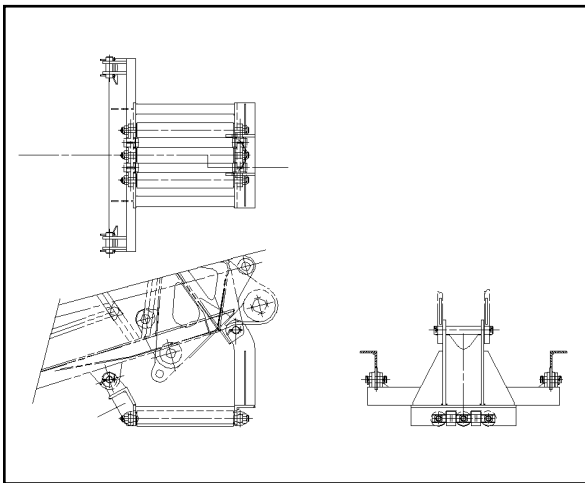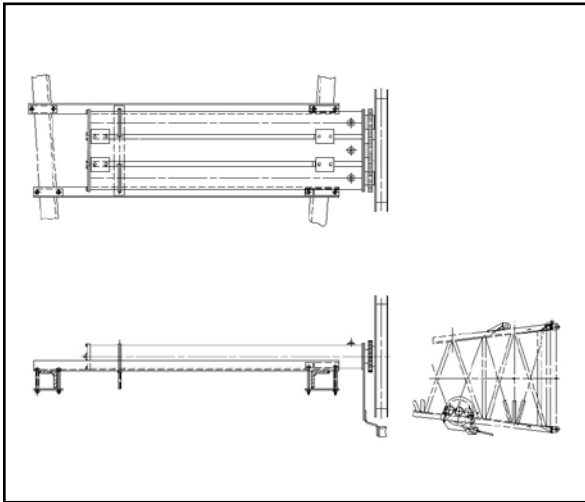

Existing models


555, 777, 14000, 15000

Notes

Manitowoc recommends machine be equipped with free-fall drums for clamshell operation. For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Collector ring

- Collector ring provides electrical power to components located above the crane turntable bearing. Consists of the collector ring, mounting hardware and junction box.

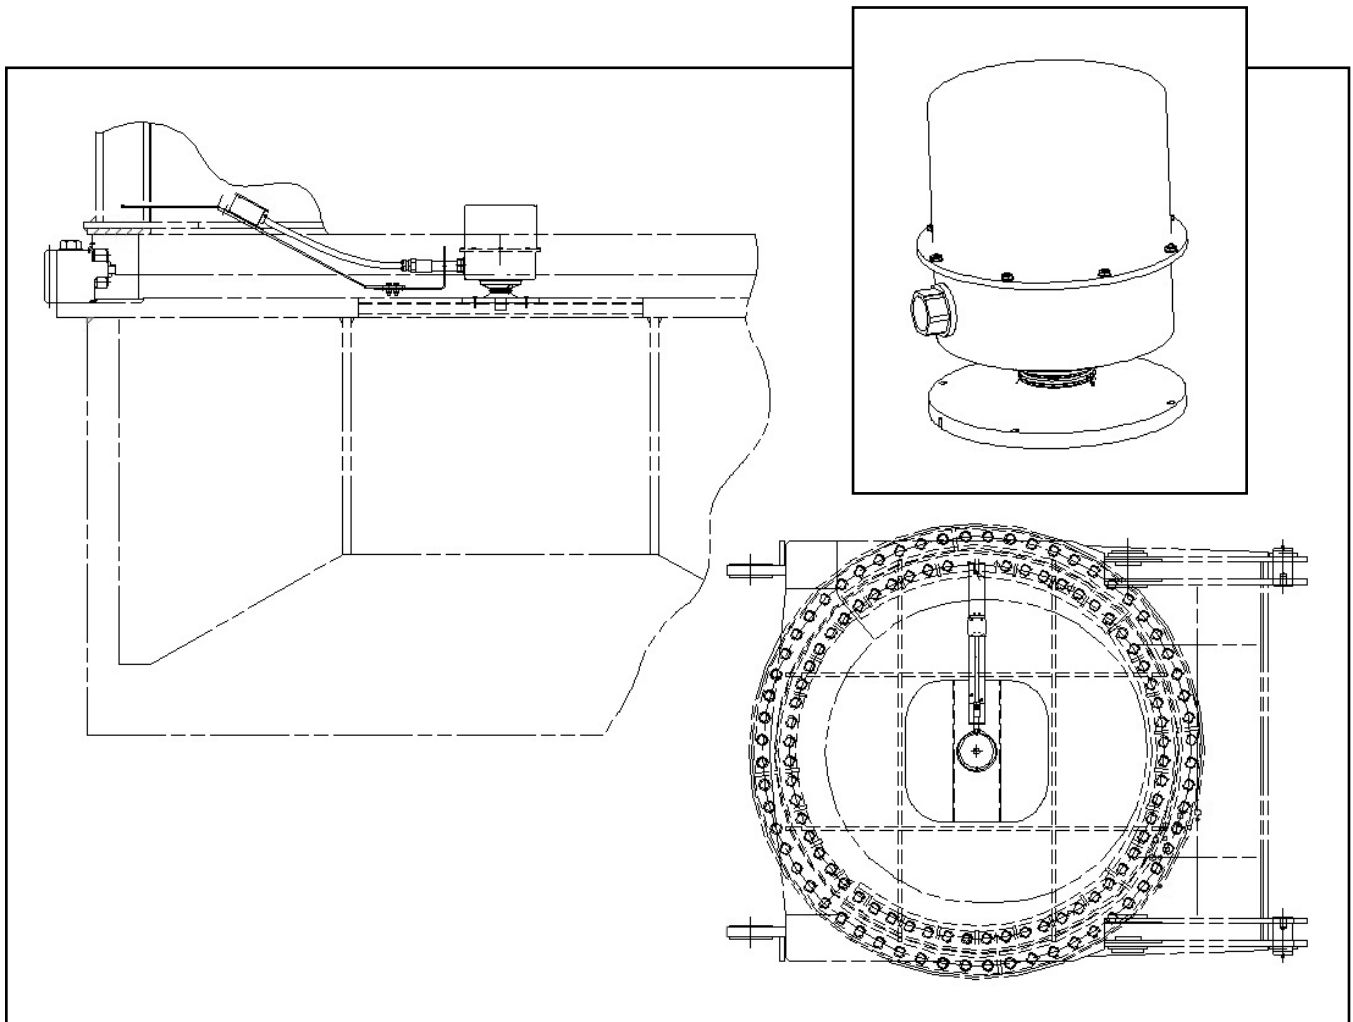

Existing models

2250

Notes

Collector ring specifications determined by requirements of all electrical components. For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Counterweight

> Custom sized counterweight to allow for customer supplied attachments.



Existing models




18000

Notes

For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Custom capacity chart

- Custom capacity charts to complement existing capacity charts or when a capacity chart does not exist.

																																																															
Clamshell/Grapple Capacities Boom No. 17 with Open Throat Top 75,900 lb Counterweight Crawler Machine on a Barge 0 Degree thru 3 Degree Static Machine List		4000																																																													
 CAPACITIES: Capacities are for a crawler machine when operating on a barge. Machine must be positively secured to prevent shifting. Capacities for various boom lengths and operating radii are for freely suspended loads and do not exceed 67.5% of a static tipping load. Capacities are based on tipping, structural competence (*), operating speeds, and other factors.		<table border="1"> <thead> <tr> <th>Oper. Rad. Feet</th><th>Boom Angle Deg.</th><th>Capacity 0 Degree to 1 Degree List Pounds</th><th>Capacity 1 Degree to 3 Degree List Pounds</th></tr> </thead> <tbody> <tr> <td colspan="4">60 Ft. Boom</td></tr> <tr><td>28</td><td>67.3</td><td>28,000 *</td><td>27,600 *</td></tr> <tr><td>30</td><td>65.3</td><td>28,000 *</td><td>27,600 *</td></tr> <tr><td>32</td><td>63.3</td><td>28,000 *</td><td>27,600 *</td></tr> <tr><td>34</td><td>61.3</td><td>28,000 *</td><td>27,600 *</td></tr> <tr><td>36</td><td>59.2</td><td>28,000 *</td><td>27,600 *</td></tr> <tr><td>38</td><td>57.0</td><td>28,000 *</td><td>27,600 *</td></tr> <tr><td>40</td><td>54.8</td><td>28,000 *</td><td>27,600 *</td></tr> <tr><td>45</td><td>49.1</td><td>28,000 *</td><td>27,600 *</td></tr> <tr><td>50</td><td>42.7</td><td>28,000 *</td><td>27,600 *</td></tr> <tr><td>55</td><td>35.5</td><td>28,000 *</td><td>27,600 *</td></tr> <tr><td>60</td><td>26.7</td><td>28,000 *</td><td>27,600 *</td></tr> <tr> <td colspan="4">70 Ft. Boom</td></tr> <tr> <th>Oper. Rad. Feet</th><th>Boom Angle Deg.</th><th>Capacity 0 Degree to 1 Degree List Pounds</th><th>Capacity 1 Degree to 3 Degree List Pounds</th></tr> </tbody> </table>		Oper. Rad. Feet	Boom Angle Deg.	Capacity 0 Degree to 1 Degree List Pounds	Capacity 1 Degree to 3 Degree List Pounds	60 Ft. Boom				28	67.3	28,000 *	27,600 *	30	65.3	28,000 *	27,600 *	32	63.3	28,000 *	27,600 *	34	61.3	28,000 *	27,600 *	36	59.2	28,000 *	27,600 *	38	57.0	28,000 *	27,600 *	40	54.8	28,000 *	27,600 *	45	49.1	28,000 *	27,600 *	50	42.7	28,000 *	27,600 *	55	35.5	28,000 *	27,600 *	60	26.7	28,000 *	27,600 *	70 Ft. Boom				Oper. Rad. Feet	Boom Angle Deg.	Capacity 0 Degree to 1 Degree List Pounds	Capacity 1 Degree to 3 Degree List Pounds
Oper. Rad. Feet	Boom Angle Deg.	Capacity 0 Degree to 1 Degree List Pounds	Capacity 1 Degree to 3 Degree List Pounds																																																												
60 Ft. Boom																																																															
28	67.3	28,000 *	27,600 *																																																												
30	65.3	28,000 *	27,600 *																																																												
32	63.3	28,000 *	27,600 *																																																												
34	61.3	28,000 *	27,600 *																																																												
36	59.2	28,000 *	27,600 *																																																												
38	57.0	28,000 *	27,600 *																																																												
40	54.8	28,000 *	27,600 *																																																												
45	49.1	28,000 *	27,600 *																																																												
50	42.7	28,000 *	27,600 *																																																												
55	35.5	28,000 *	27,600 *																																																												
60	26.7	28,000 *	27,600 *																																																												
70 Ft. Boom																																																															
Oper. Rad. Feet	Boom Angle Deg.	Capacity 0 Degree to 1 Degree List Pounds	Capacity 1 Degree to 3 Degree List Pounds																																																												
Weight of bucket is considered part of load. Where no capacity is shown, operation is not intended or approved.																																																															
OPERATING CONDITIONS: Machine to operate on a firm uniformly supporting surface with gantry up, and machine list not to exceed degrees noted. Refer to boom rigging No. 42935 and Wire Rope Specification chart No. 5309 . Crane operator judgment must be used to allow for adverse operating conditions and physical machine depreciation.																																																															
 OPERATING RADIUS: Operating radius is horizontal distance from axis of rotation at barge deck, to center of gravity of freely suspended load. Boom angle is angle above true horizontal of a line drawn through boom hinge pin and upper boom point shaft centerline.																																																															

Existing models

All

Notes

For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Detachable upper boom point

- Special detachable upper points for “wind” work, personnel handling, or special lift requirements. Points consist of weldment, sheave(s), RCL and ATB.



Existing models

777, 14000, 999, 2250, 16000, 18000

Notes

For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Emergency backup power

- Emergency backup power allows for operation in the event of main engine failure. Consists of an electric motor, hydraulic pump(s), valves, tubing and controls for independent operation of one of the following: boom hoist, swing and load hoists.



Existing models

777, 14000, 999, 2250

Notes

Contact Lift Solutions regarding emergency operation. For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Generator assembly

- Diesel generator set mounted to machine to power any or all of the following: cold weather package, boom lights, rotating bed lights, boom position lights. Consists of a diesel generator, controls, mounting frame and load center.



Existing models


222WC, 777, 14000, 999, 2250, 16000, 18000

Notes

Size and voltage depends on customer electrical requirements. For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Horn, compressed air

➤ Air horn kit consists of compressor, air tank, solenoid valve, horn, tubing and fittings.

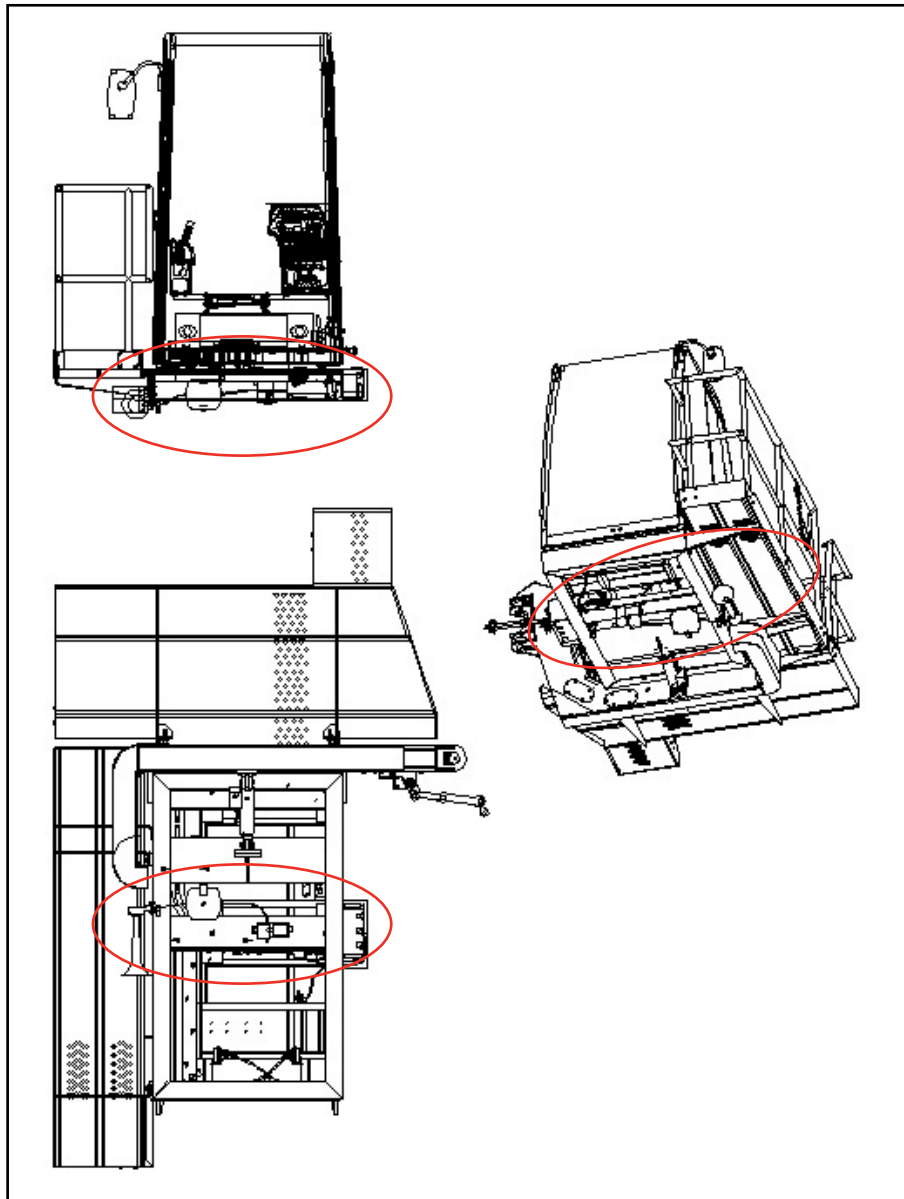

Existing models


18000

Notes

For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Hydraulic equipment/attachments

- Machine supplied hydraulic power to run customer supplied equipment. Consists of engineered attachment points, stability calculations, special reeving, hydraulic reservoir, piping, valves and connection points.

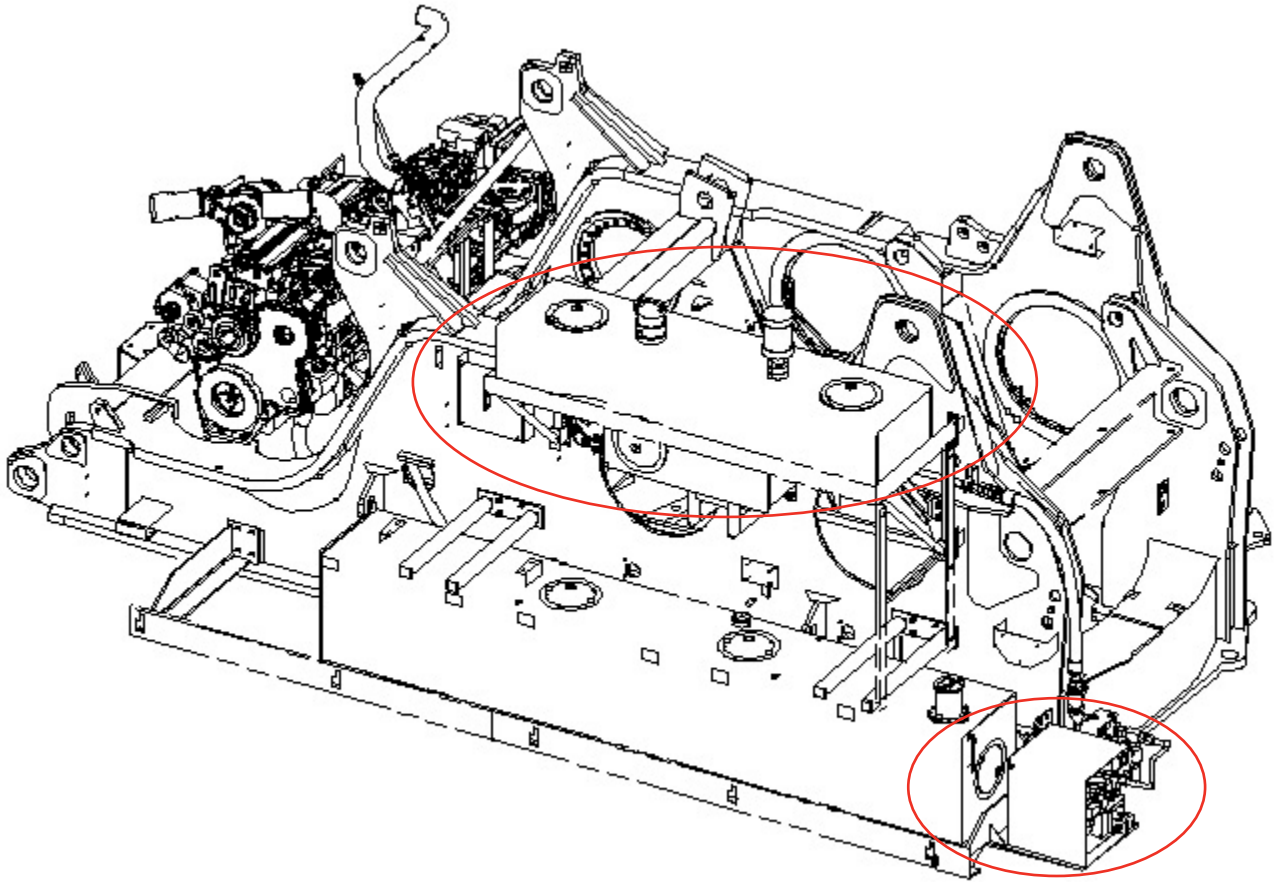

Existing models


3900, 4100W, 4600, 1015, 777, 14000, 2250

Notes

Customer to supply Lift Solutions with manufacturer specifications for flow, pressure and/or weights. For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Lifting arrangement

- Lift arrangements allow customer to handle complete machine or components. Consists of engineered lift points, rigging components and sling design.

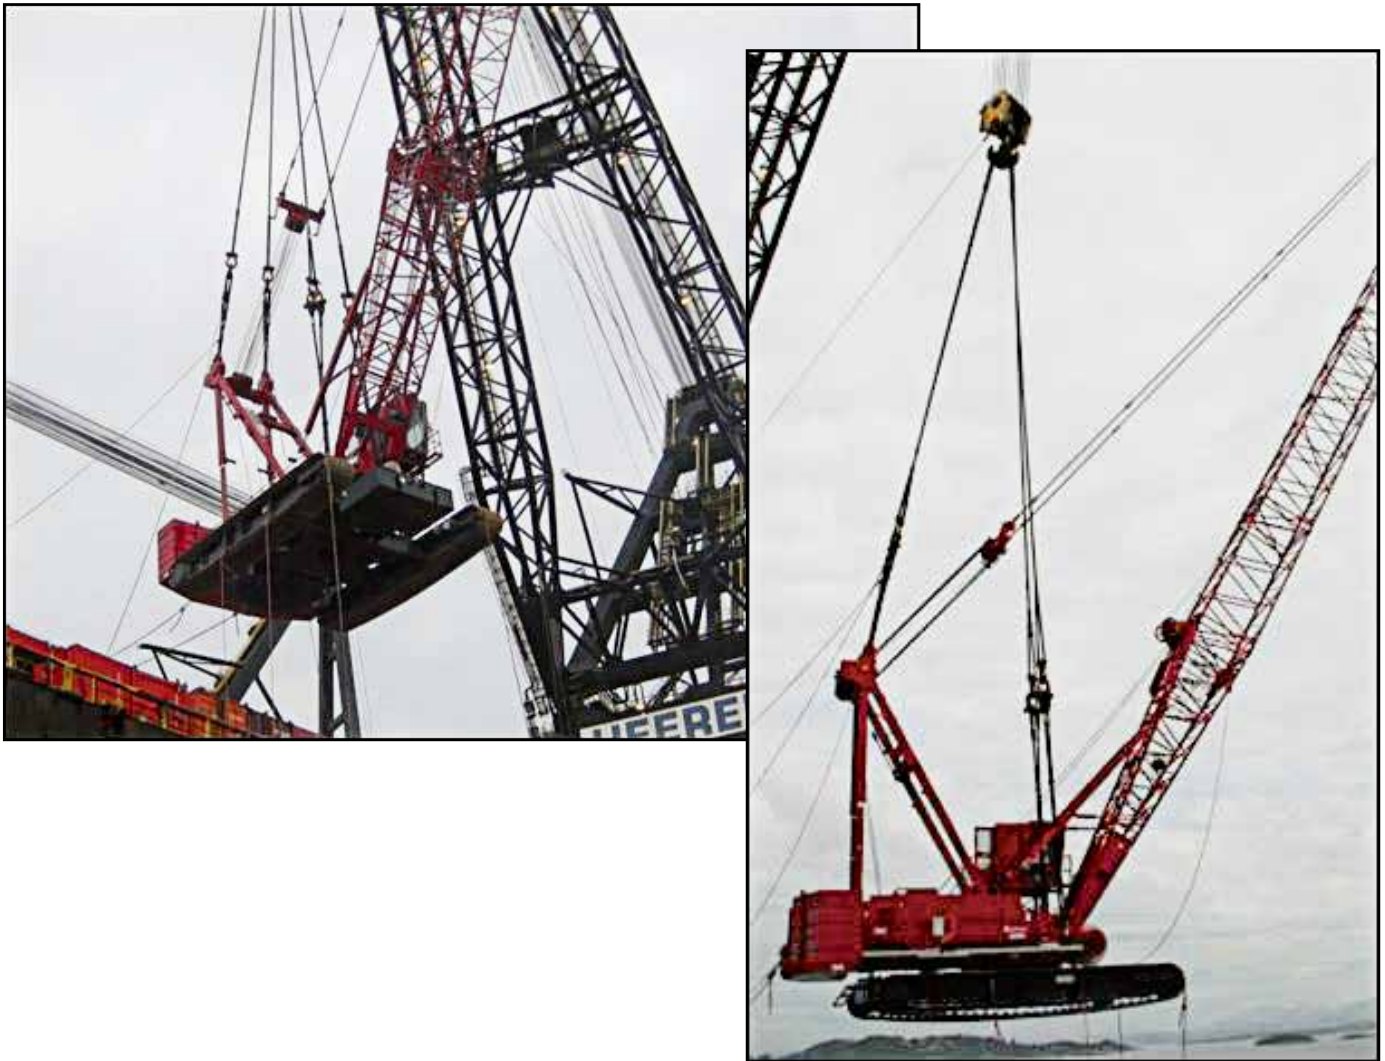

Existing models

222WC, 555, 777, 14000, 888, 999, 2250

Notes

For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

➤ When the job site has space restrictions, Lift Solutions can lay out your lift or generate assemble/disassemble in the air procedures.




Notes

Manitowoc Lift Solutions | Page 17

Lights, boom position

- Boom position lights on boom point, jib point, fixed mast or jib strut. Consists of light(s), wiring, mounting hardware and battery charger with power receptacle.

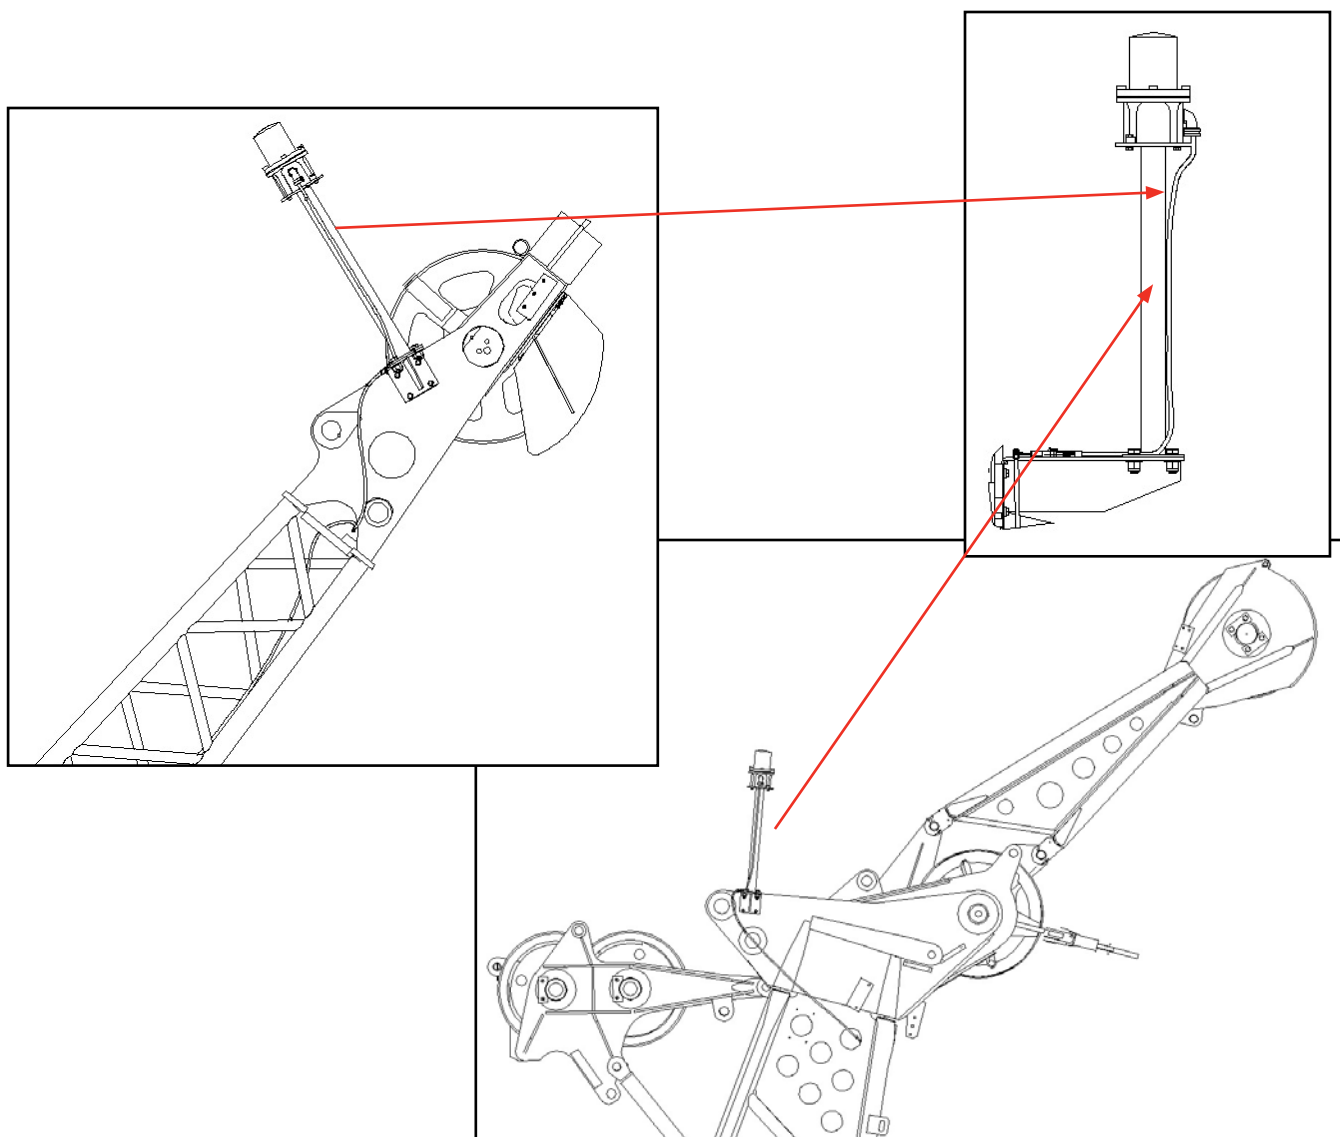

Existing models

777, 14000, 999, 2250, MAX-ER 2000, 16000, 18000, 21000

Notes

For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Lights, boom

- > Boom lighting consists of multiple lights mounted on the boom to illuminate areas under the boom. Power for lights come from generator assembly.



Existing models

222WC, 555, 777, 14000, 999, 2250, 16000, 18000

Notes

Number and type of lights to be specified by customer. See generator assembly for description. For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Lights, rotating bed

- Rotating bed lighting consists of multiple lights mounted on the rotating bed to illuminate areas around the machine. Power for the lights come from the generator assembly.



Existing models

222WC, 555, 777, 14000, 999, 2250, 16000

Notes

Number and type of lights to be specified by customer. See generator assembly for description. For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Lights, service

➤ Service lights on rotating bed to illuminate components for service work.



Existing models


18000

Notes

Number and type of lights to be specified by customer. For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Load block/weight ball

- Load block/weight ball designed to customer requirement: overhaul weight, duplex hook, quick reeve and GOST approved retention of hook nut.

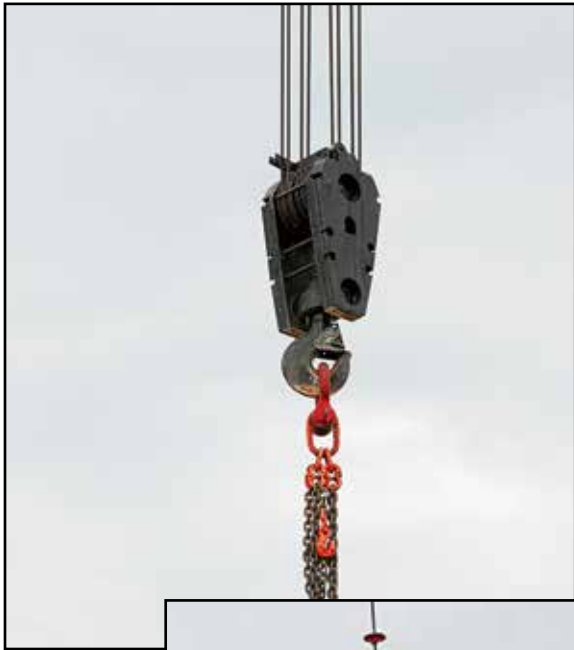

Existing models


All

Notes

For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Mast lay down

- Design to allow for fixed mast to lay down on boom for moving under obstructions. Consists of special procedures and support components.

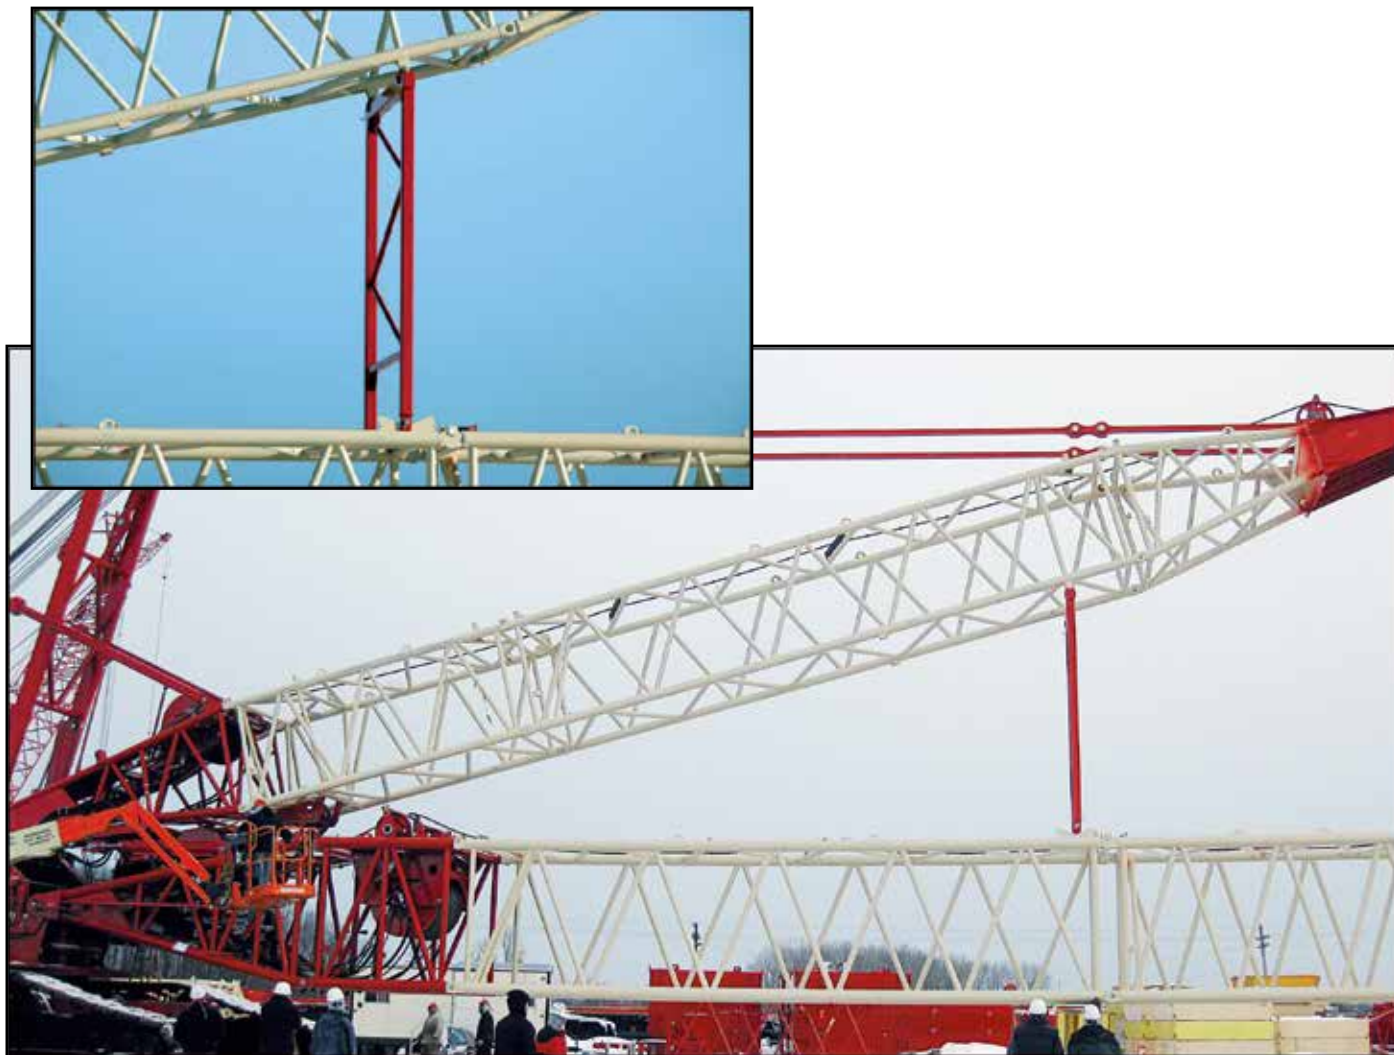

Existing models

4600 Ringer, 18000

Notes

For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Operator's cab, elevated

- Elevated operator's cab allows operator to see over piers, boat rails or tunnel jobs. Consists of ladders, handrails, platforms and rotating bed modification to support the structure.



Existing models


888, 999, 2250, 4100W

Notes

Contact Lift Solutions with cab height requirements. For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Operator's cab, multi-position

- > Multi-position operator's cab allows operator height choices to see over obstructions. Consists of handrails, platforms, cab arm, and rotating bed modification to support the structure.

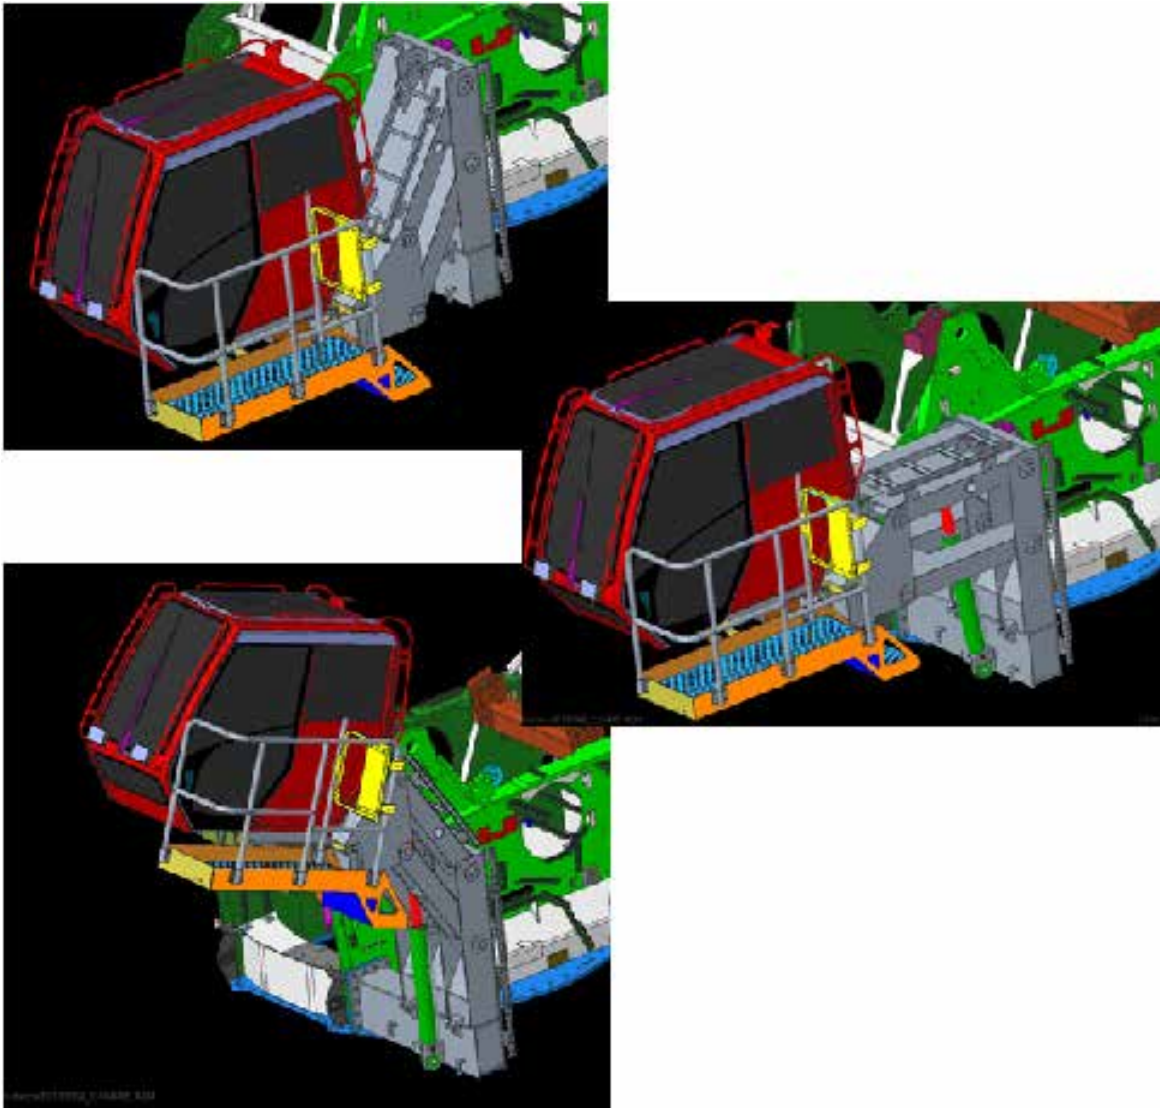

Existing models



14000

Notes

Contact Lift Solutions with cab height requirements. For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Pedals, travel

- > Foot pedals allow operator to travel while booming, swinging or running hoist drums. Consists of foot pedals mounted in cab floor plate.

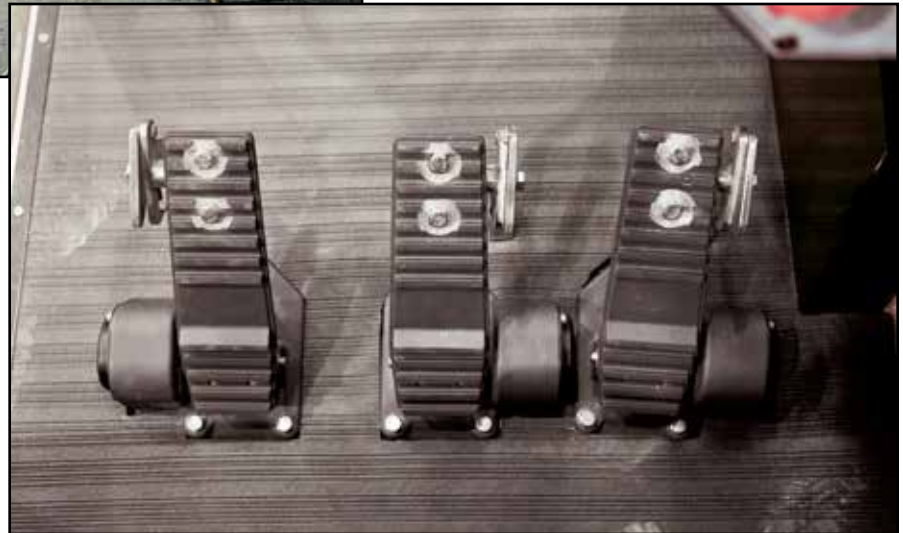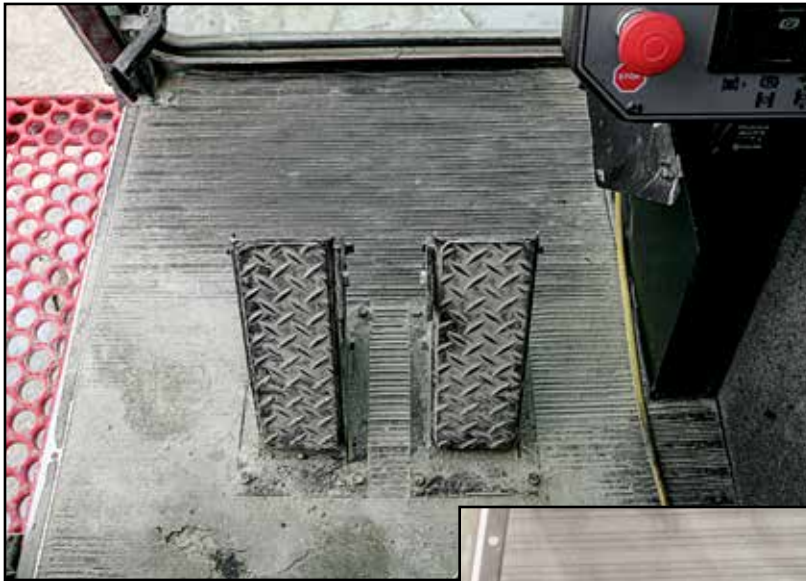

Existing models

555, 777, 14000, 2250

Notes

For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Personnel handling

- > Consists of a drum with wire rope, rope guides, special detachable upper boom point with single sheave for whip line and second single sheave for personnel handling line. Optional emergency lowering capability available for customer supplied or Manitowoc supplied emergency backup power.



Existing models


777, 14000, 999, 2250, 16000

Notes

See Emergency Backup Power for related descriptions regarding this solution. For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Pile lead adapter

- Pile lead adapters are designed to connect fixed leads to a boom top. Consists of weldment and/or links and optional hydraulics to control batter..

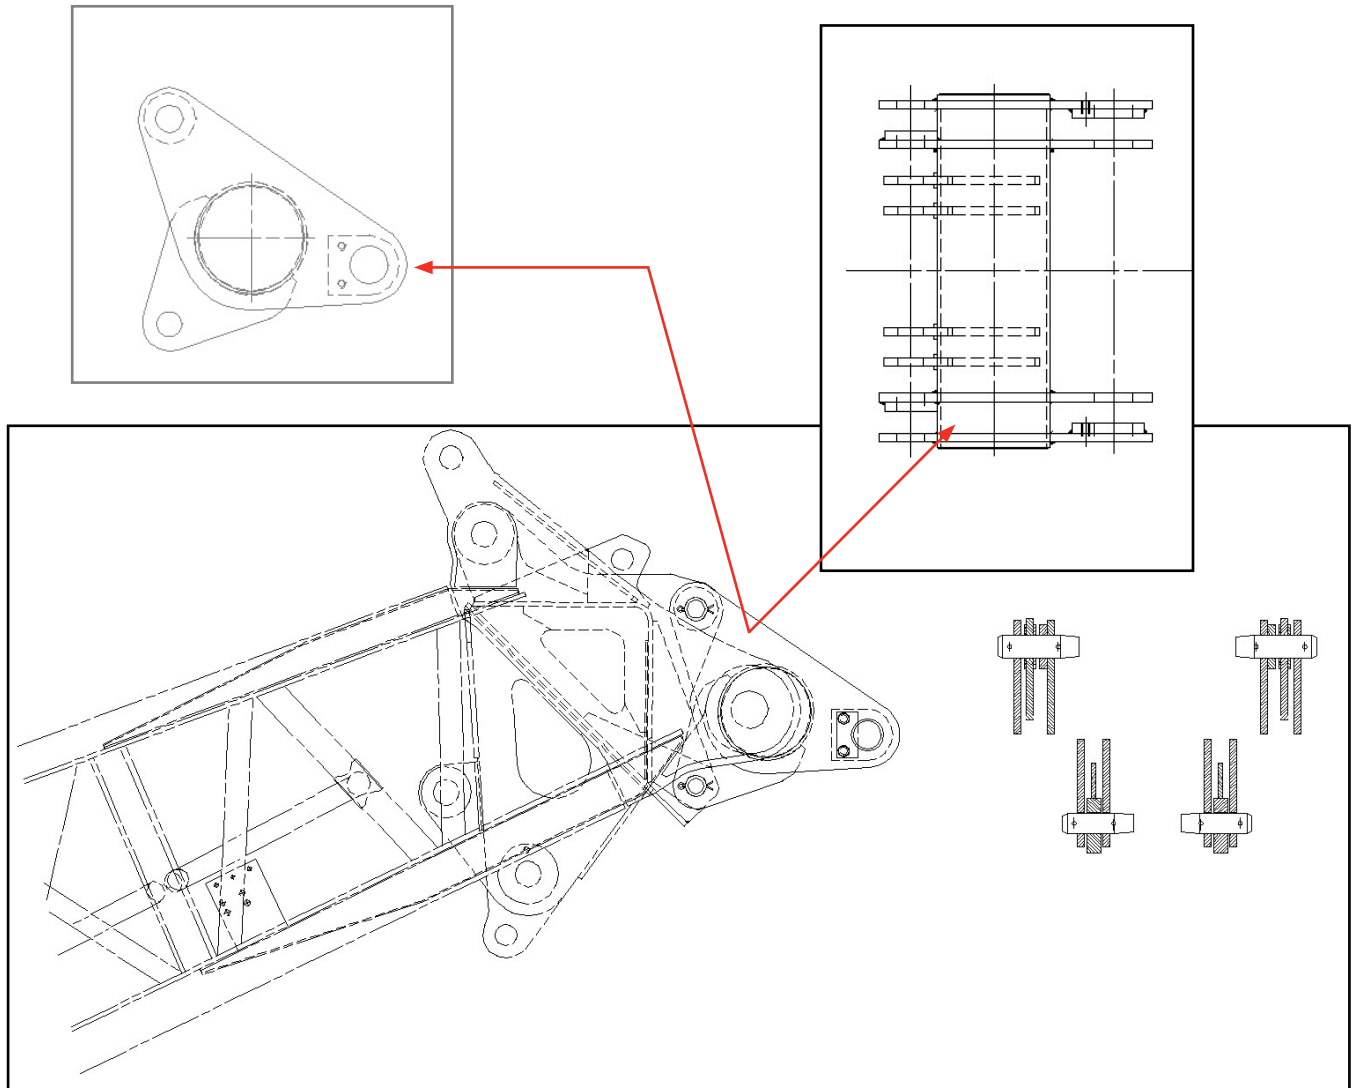

Existing models


555, 777, MLC165, 14000, 2250

Notes

Contact Manitowoc with the make and model of your pile driver for an adapter to match. See hydraulic equipment/attachments for hydraulic description. For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Public Address (PA) system

- PA system allows communication from the operator to support crew. Consists of cab mounted microphone, loudhailer and speaker.

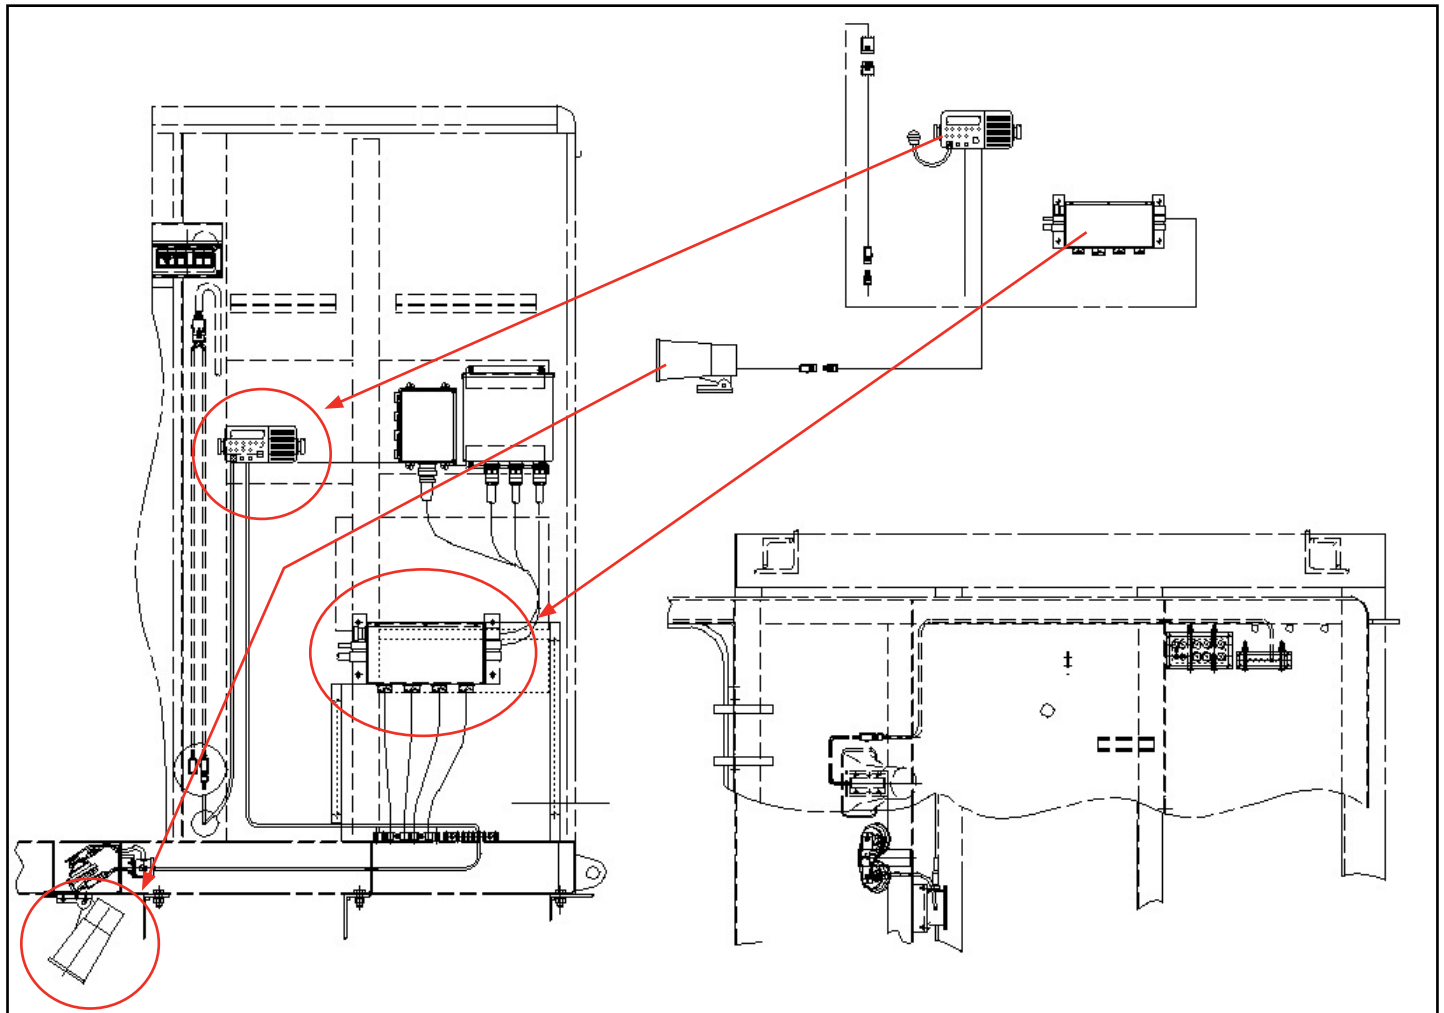

Existing models

777

Notes

For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Rated Capacity Limiter, external display

- Externally mounted display of RCL/RCI data for crew visibility. Consists of display screen visible to work crew.



Existing models

222, 555, 777, 14000

Notes

For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Rated Capacity Limiter, light bar

➤ Light bar displaying a green/yellow/red light indication based upon percentage of rated capacity.



Existing models



MLC165, 14000, 31000

Notes

For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Rope guards

➤ Designed to keep hoist rope on the sheaves.

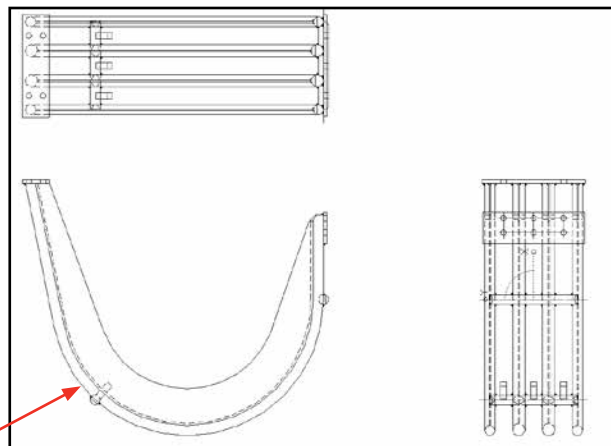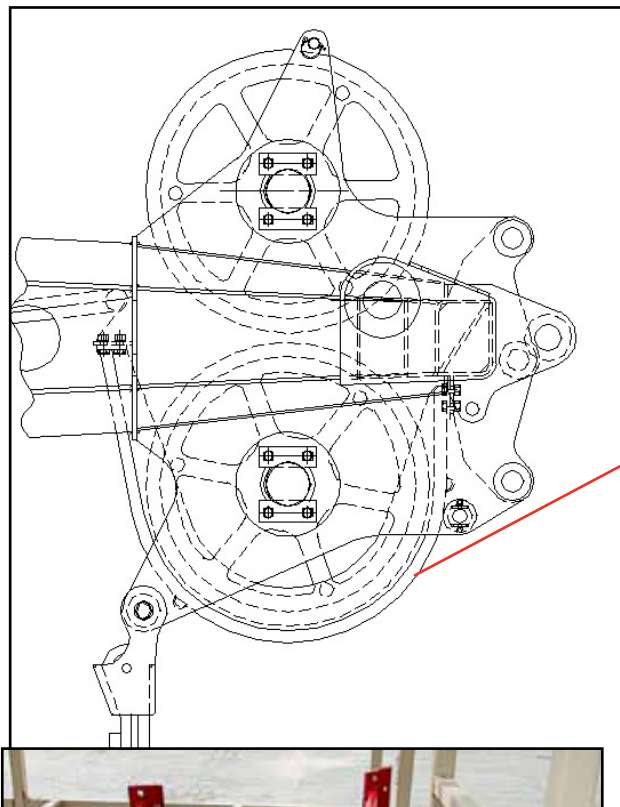

Existing models


777, 2250

Notes

Contact Manitowoc regarding machine operation for guidance on rope guards. For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Set-up remote control

- Special design remote control, wired or wireless, to control the assembly or disassembly of the crane.

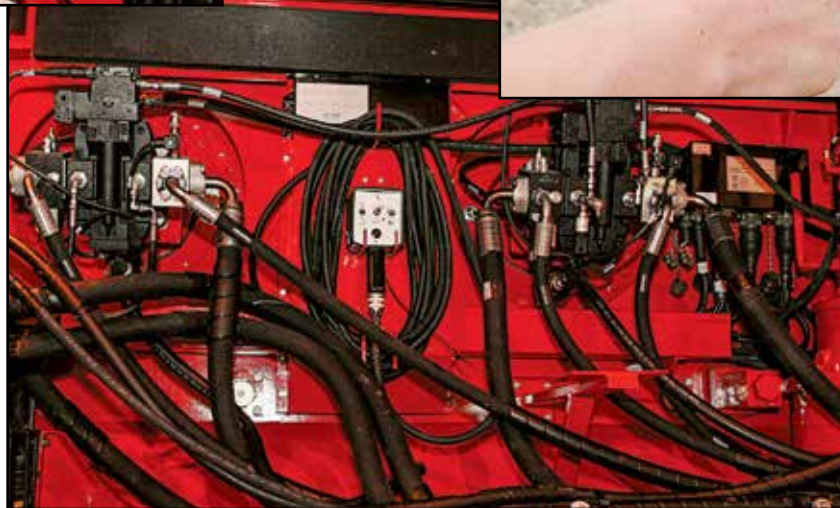

Existing models


16000

Notes

For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Spark arrestor

➤ For job sites requiring spark arrestor technology.

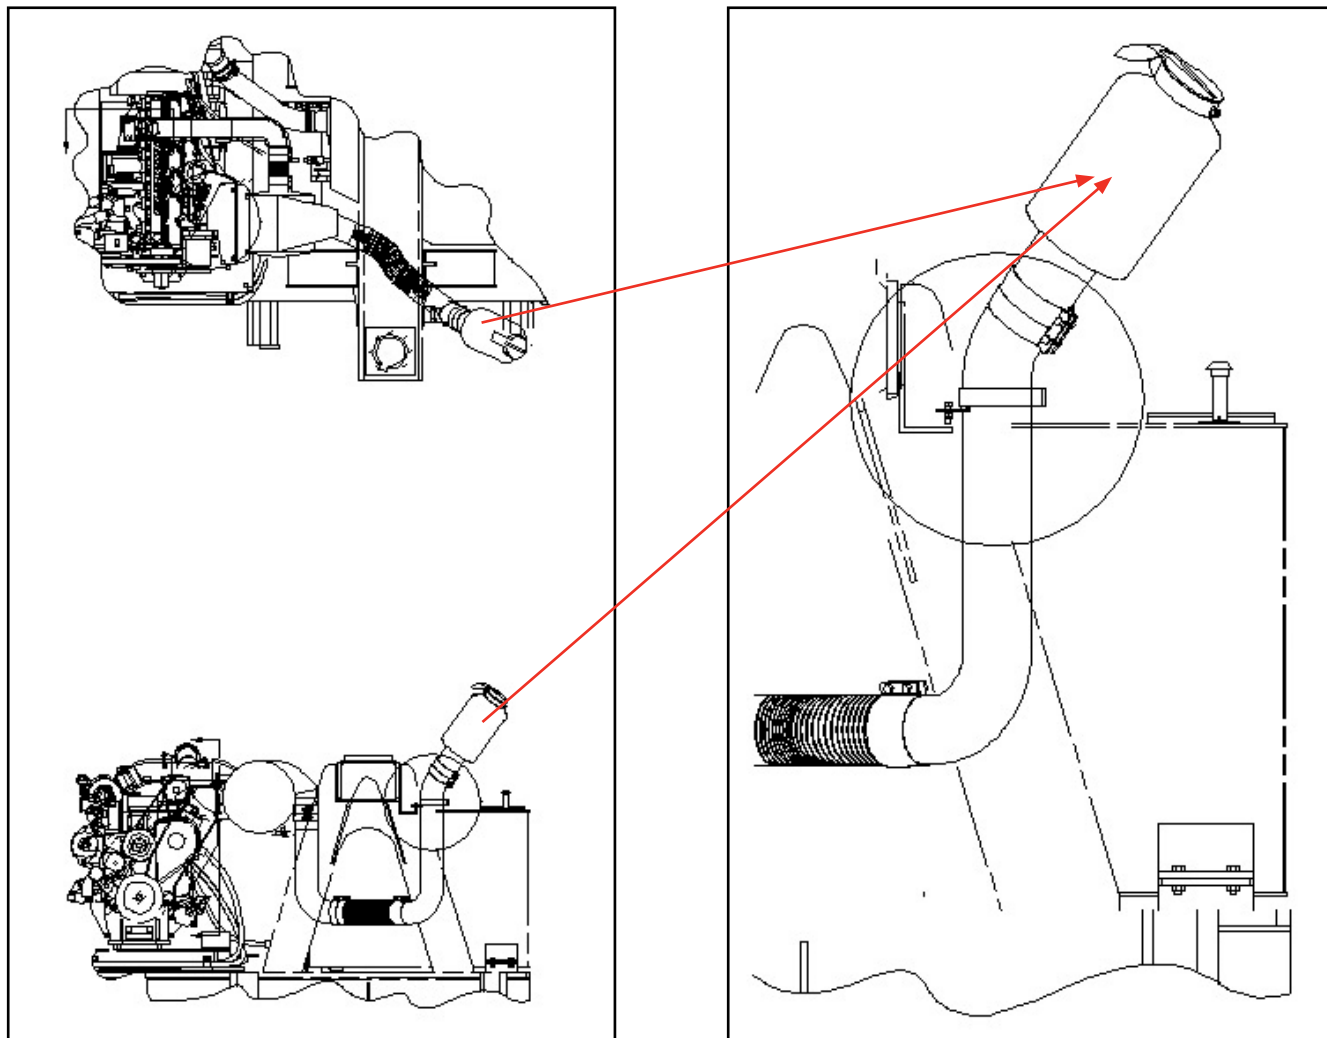

Existing models


555, 14000, 999, 16000

Notes

For Tier III and lower engines. For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Swing limiter

> To set swing boundaries, electronic and mechanical swing limits are available for your crane.

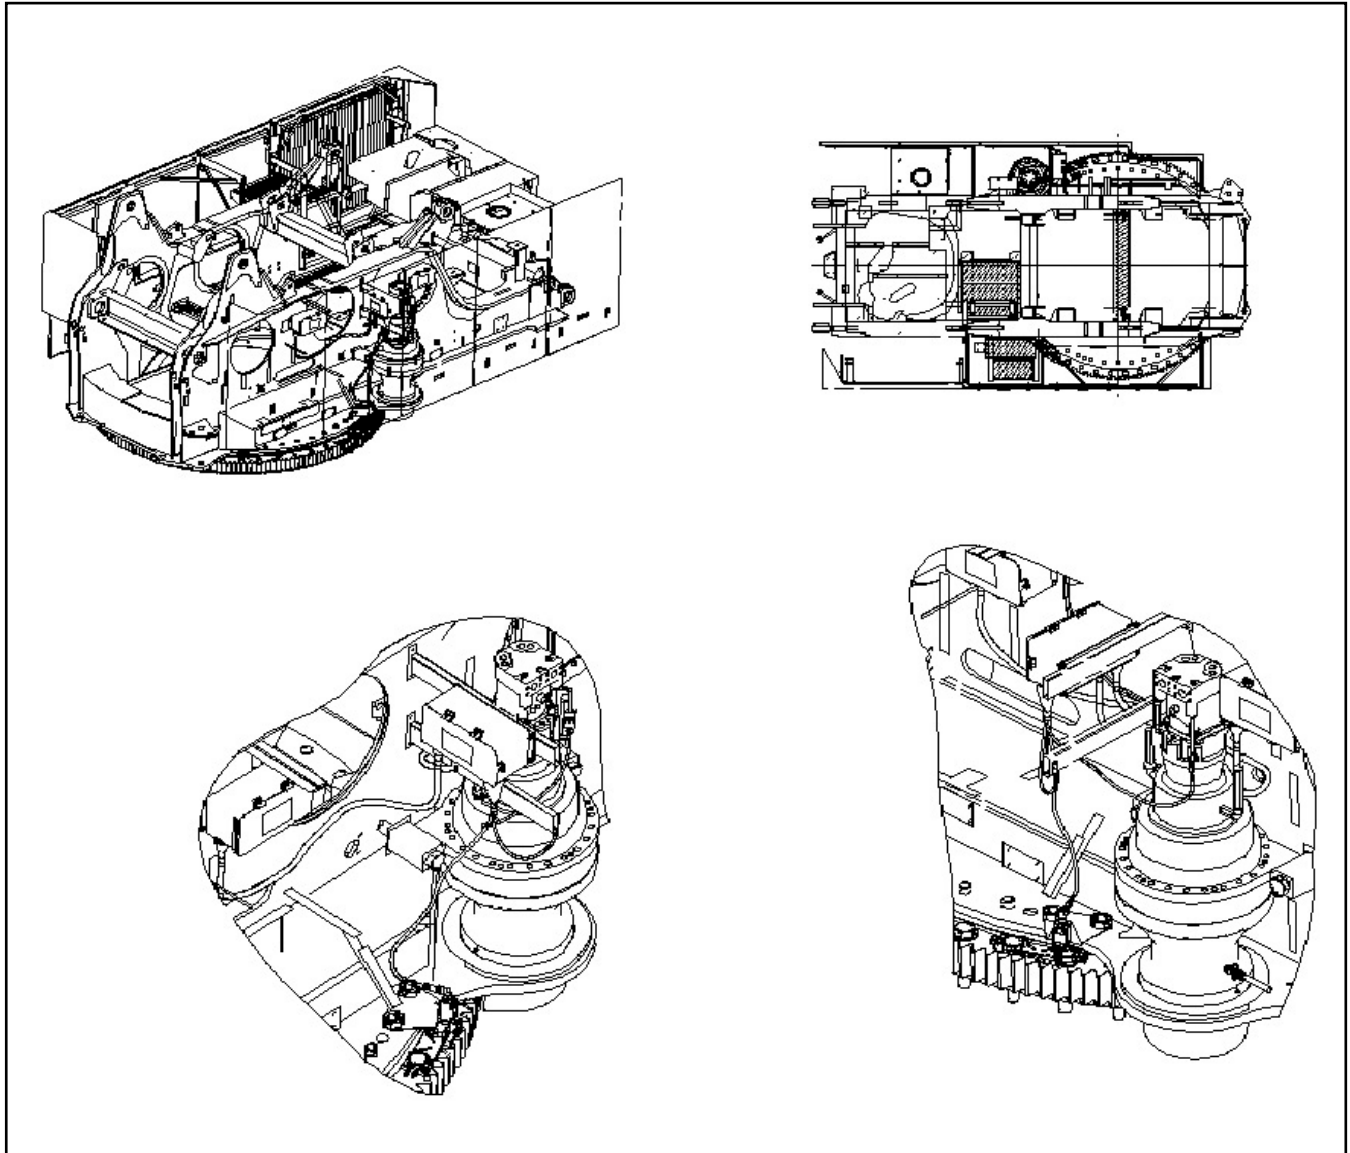

Existing models


555, 14000, 888, 999, 15000, 2250, 16000, 18000

Notes

For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Tagline

- For clamshell/duty-cycle work where bucket or grab control is required. Consists of spring loaded or hydraulic tagline.

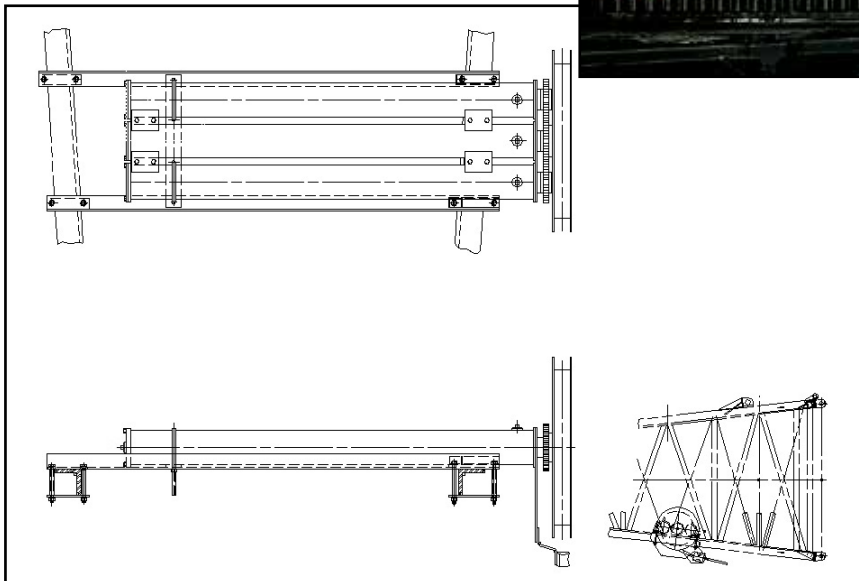

Existing models



777, 1400, 999, 2250, 16000, 18000

Notes

For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Walkways, carbody

➤ Special walkways are available on carbody to access machinery or perform required inspections.

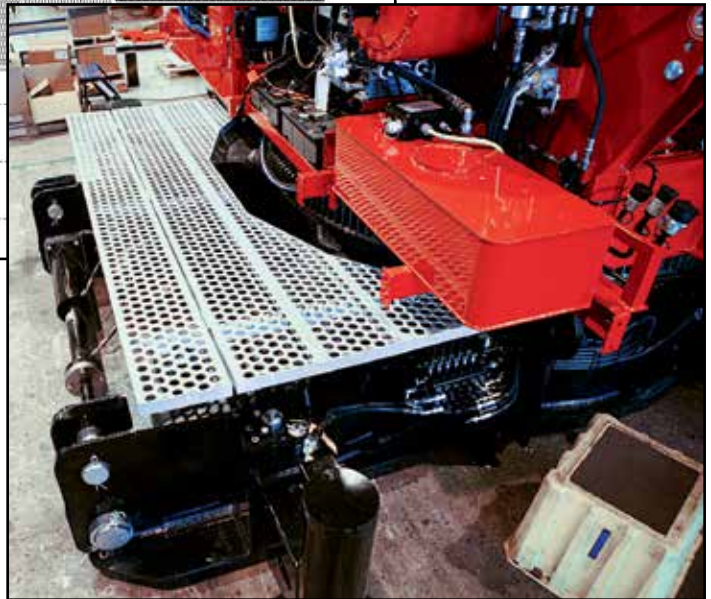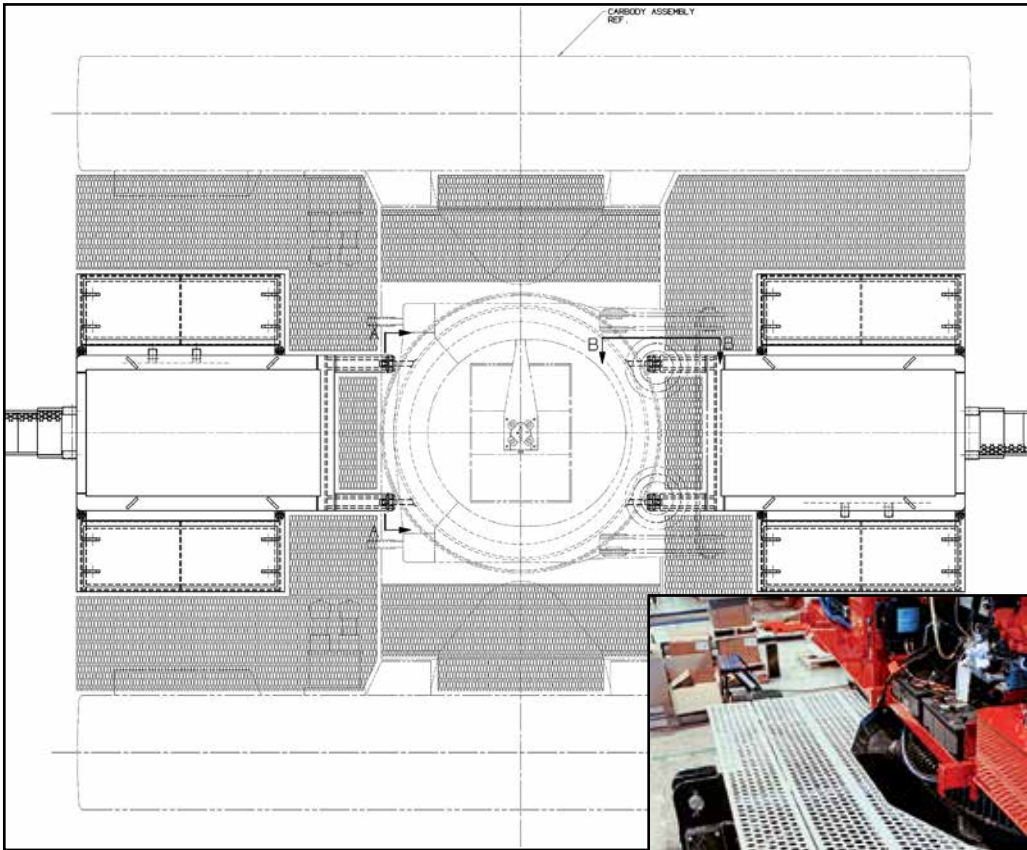

Existing models

999

Notes

For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Walkways, rotating bed

- Special walkways with handrails are available on rotating bed to access machinery or perform required inspections.



Existing models


2250, 18000

Notes

For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.

Wind speed alarm

> An audio alarm is available to enhance the standard wind speed indicator.

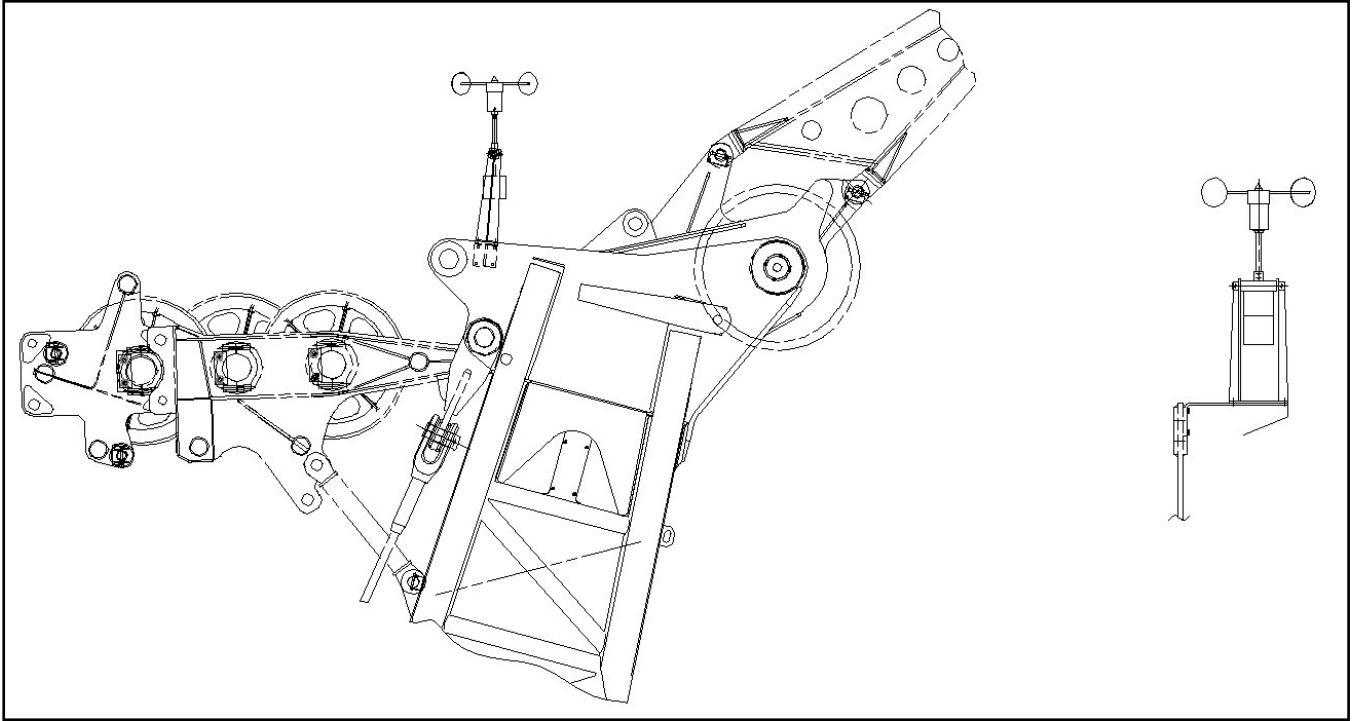

Wind Speed Indicator

Wind speed icon displays the steady wind speed and maximum gust wind speed. The indicator is reset with Confirm button in ***level 3***.



Existing models

2250

Notes

For pricing and lead time, please contact your local dealer or the Lift Solutions Team with specific product requirements.



**Lift
Solutions**

Manitowoc Cranes

Regional headquarters

Americas

Milwaukee, Wisconsin, USA
Tel: +1 414 760 4600

Shady Grove, Pennsylvania, USA
Tel: +1 717 597 8121

Europe and Africa

Dardilly, France - TOWERS
Tel: +33 (0) 4 72 18 20 20

Wilhelmshaven, Germany - MOBILE
Tel: +49 (0) 4421 294 0

APAC

Shanghai, China
Tel: +86 21 6457 0066

Singapore
Tel: +65 6264 1188

Middle East and India

Dubai, UAE
Tel: +971 4 8862677



This document is non-contractual. Constant improvement and engineering progress make it necessary that we reserve the right to make specification, equipment, and price changes without notice. Illustrations shown may include optional equipment and accessories and may not include all standard equipment.