

Liftcrane Boom Capacities

Boom No. B10:500

**with 180 200 kg Fixed Position Counterweight
at 4,1 m Position**

Crawler Machine on a Barge

0 Degree thru 3 Degree Static Machine List

No Travel - 360 Degree Rating - Two Swing Drives

MLC300 SERIES 2



LIFTING CAPACITIES: Lifting capacities are for a crawler machine when operating on a barge. Machine shall be positively secured to prevent shifting. Lifting capacities for various boom lengths and operating radii are for freely suspended loads and may be based on percent of static tipping or strength of structural components.

Upper boom point capacity for liftcrane service with single part whip line from Drum 6 is 13 600 kg or 27 200 kg with two part whip line. When Drum 2 or Drum 3 is used, capacity with single part whip line is 16 600 kg or 33 300 kg with two part whip line. In all cases, upper boom point capacities cannot exceed those listed for main boom capacity.

Weight of all load blocks, hooks, weight ball, slings, hoist lines, etc., beneath boom point sheaves is considered part of load. Boom is not to be lowered beyond radii where combined weights are greater than rated capacity. Where no capacity is shown, operation is not intended or approved.

OPERATING CONDITIONS: Machine to operate on a firm and uniformly supporting surface with machine list not to exceed degrees noted. Refer to Boom Rigging **No. 81023380**, Wire Rope Specifications chart **No. 9341-A**, Counterweight Arrangements **No. 9345-A**, and Wind Conditions chart **No. 9344-A**. Crane operator judgment must be used to allow for dynamic load effects of swinging, hoisting or lowering, wind conditions, as well as adverse operating conditions and physical machine depreciation. Refer to the Operator Manual for operating guidelines.



OPERATING RADIUS: Operating radius is horizontal distance from axis of rotation at barge deck to center of vertical hoist line or load block.



BOOM ANGLE: Boom angle in degrees (°) is angle between horizontal and centerline of boom butt and inserts, and is an indication of operating radius. In all cases, operating radius shall govern capacity.



BOOM POINT ELEVATION: Boom point elevation is vertical distance from barge deck to centerline of boom point shaft.

MACHINE EQUIPMENT: Machine equipped with two swing drives, 9 700 mm crawlers, 1 219 mm or 1 524 mm treads, 9 144 mm live mast, 24 part boom hoist reeving, boom support straps, and 180 200 kg Fixed Position Counterweight.

Warning: Luffing jib backstay straps must be removed before use of this chart. *Crane tipping or structural damage can occur.*

Refer to Tables 1 and 2 for raising ability with the maximum weight of all load blocks, hooks, weight ball, slings, and hoist lines beneath boom point sheaves. For block weights shown with #, load blocks, hooks, weight ball, and slings must remain on barge deck until combined weights are within rated capacity of chart. Raising is not permitted in shaded areas of table.

Combined weight beneath boom point sheaves must not exceed block weight shown.


Table 1

Over End or Side of Crawlers				
Boom Length (m)	Machine List			
	0°	1°	2°	3°
	Block Weight (kg)			
30,0	10 300	10 300	Raising Not Permitted	
36,0	10 300	10 300		
42,0	10 300	10 300	10 300	10 300
48,0	10 300	10 300	10 300	10 300
54,0	10 300	10 300	10 300	10 300
60,0	7 100	7 100	7 100	7 100
66,0	3 700	3 700	3 700	3 700
72,0	3 700	3 700	3 700	3 700
78,0	#	#	#	#
84,0	Raising Not Permitted			


Table 2

Over End of Blocked Crawlers				
Boom Length (m)	Machine List			
	0°	1°	2°	3°
	Block Weight (kg)			
30,0	10 300	10 300	Raising Not Permitted	
36,0	10 300	10 300		
42,0	10 300	10 300	10 300	10 300
48,0	10 300	10 300	10 300	10 300
54,0	10 300	10 300	10 300	10 300
60,0	7 100	7 100	7 100	7 100
66,0	3 700	3 700	3 700	3 700
72,0	3 700	3 700	3 700	3 700
78,0	#	#	#	#
84,0	#	#	#	#
Warning: Crane must remain in-line with crawlers when raising over end of blocked crawlers until operating radius is within 360 degree chart. Crane tipping or structural damage can occur.				


Explanation of Symbols

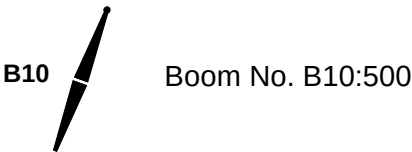


Boom No. B10:500




Fixed Position Counterweight




360 Degree Rating




Boom Length

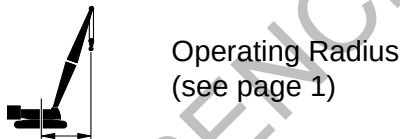


Operating Radius
(see page 1)




Boom Angle
(see page 1)

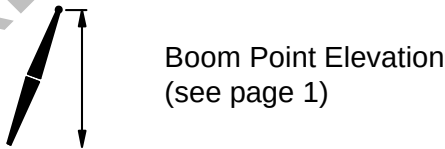

Boom Point Elevation
(see page 1)




Machine List



Lifting Capacities
(see page 1)



			 0° kg	 1° kg
11,0	73,7	30,7	170 600	
12,0	71,6	30,3	148 700	
13,0	69,6	29,9	132 500	124 000
14,0	67,5	29,5	118 300	111 300
15,0	65,4	29,0	106 900	101 000
16,0	63,2	28,5	97 400	92 500
17,0	61,0	27,9	89 100	84 900
18,0	58,8	27,3	82 100	78 400
19,0	56,5	26,6	76 000	72 800
20,0	54,1	25,8	70 500	67 700
22,0	49,0	24,1	61 500	59 400
24,0	43,6	22,1	54 200	52 500
26,0	37,4	19,5	48 100	46 800
28,0	30,2	16,3	43 100	42 000
30,0	20,5	11,7	38 600	37 900



 m	 °	 m	 0° kg	 1° kg	 2° kg	 m
9,8	78,5	37,2	206 500			9,8
10,0	78,1	37,2	198 700			10,0
11,0	76,5	36,9	170 200	155 100		11,0
12,0	74,8	36,6	148 900	136 500		12,0
13,0	73,1	36,3	132 700	122 500		13,0
14,0	71,5	36,0	118 400	110 100	102 700	14,0
15,0	69,7	35,6	106 900	100 000	93 800	15,0
16,0	68,0	35,2	97 500	91 600	86 200	16,0
17,0	66,3	34,7	89 100	84 100	79 400	17,0
18,0	64,5	34,2	82 100	77 700	73 700	18,0
19,0	62,7	33,7	76 000	72 200	68 600	19,0
20,0	60,9	33,1	70 500	67 200	64 000	20,0
22,0	57,1	31,8	61 500	58 900	56 400	22,0
24,0	53,1	30,3	54 200	52 100	50 100	24,0
26,0	48,9	28,6	48 200	46 400	44 800	26,0
28,0	44,4	26,6	43 200	41 700	40 400	28,0
30,0	39,5	24,2	38 900	37 700	36 600	30,0
32,0	33,9	21,4	35 100	34 200	33 200	32,0
34,0	27,3	17,7	31 900	31 100	30 400	34,0

B10



180 200 kg



360°

m	°	m	kg	kg	kg	kg	kg	m
9,1	81,0	43,5	218 600					9,1
10,0	79,8	43,3	198 800					10,0
11,0	78,4	43,1	170 300	152 500				11,0
12,0	77,0	42,9	148 900	134 800				12,0
13,0	75,6	42,6	132 600	121 000	111 000			13,0
14,0	74,2	42,3	118 300	108 800	100 500			14,0
15,0	72,8	42,0	106 800	98 900	91 800			15,0
16,0	71,3	41,6	97 400	90 600	84 500	79 000		16,0
17,0	69,9	41,2	89 000	83 100	77 900	73 100		17,0
18,0	68,4	40,8	82 000	76 900	72 300	68 000		18,0
19,0	66,9	40,4	75 900	71 400	67 300	63 600		19,0
20,0	65,4	39,9	70 300	66 400	62 800	59 500		20,0
22,0	62,3	38,9	61 400	58 200	55 300	52 600		22,0
24,0	59,1	37,7	54 000	51 500	49 100	46 900		24,0
26,0	55,8	36,3	48 000	45 900	43 900	42 100		26,0
28,0	52,4	34,8	43 000	41 300	39 600	38 000		28,0
30,0	48,8	33,1	38 700	37 300	35 900	34 500		30,0
32,0	45,0	31,1	35 000	33 800	32 600	31 400		32,0
34,0	40,9	28,8	31 800	30 800	29 700	28 800		34,0
36,0	36,3	26,2	29 000	28 100	27 200	26 400		36,0
38,0	31,2	23,0	26 400	25 700	25 000	24 300		38,0
40,0	25,2	19,1	24 200	23 600	23 000	22 400		40,0



 m	 °	 m	 0° kg	 1° kg	 2° kg	 3° kg	 m
7,9	83,6	49,8	236 700				7,9
8,0	83,5	49,8	235 100				8,0
8,5	82,9	49,7	224 500				8,5
9,0	82,3	49,6	214 800				9,0
10,0	81,1	49,4	195 600	170 700			10,0
11,0	79,9	49,3	170 200	150 200			11,0
12,0	78,7	49,0	148 700	132 900	119 700		12,0
13,0	77,5	48,8	132 400	119 400	108 300		13,0
14,0	76,2	48,5	118 000	107 300	98 100	90 100	14,0
15,0	75,0	48,3	106 600	97 600	89 700	82 800	15,0
16,0	73,7	48,0	97 100	89 400	82 600	76 600	16,0
17,0	72,5	47,6	88 600	82 000	76 200	70 900	17,0
18,0	71,2	47,3	81 600	75 900	70 700	66 000	18,0
19,0	69,9	46,9	75 500	70 400	65 900	61 700	19,0
20,0	68,7	46,5	70 000	65 500	61 400	57 700	20,0
22,0	66,1	45,6	61 000	57 400	54 100	51 100	22,0
24,0	63,4	44,6	53 600	50 700	48 000	45 500	24,0
26,0	60,6	43,5	47 600	45 200	42 900	40 800	26,0
28,0	57,8	42,2	42 600	40 600	38 600	36 800	28,0
30,0	54,9	40,8	38 300	36 600	34 900	33 400	30,0
32,0	51,9	39,3	34 600	33 100	31 700	30 400	32,0
34,0	48,7	37,5	31 400	30 100	28 900	27 800	34,0
36,0	45,4	35,6	28 600	27 500	26 400	25 400	36,0
38,0	41,9	33,4	26 000	25 100	24 200	23 300	38,0
40,0	38,0	30,9	23 800	23 000	22 200	21 500	40,0
42,0	33,8	28,0	21 800	21 100	20 400	19 800	42,0
44,0	29,1	24,6	20 000	19 400	18 800	18 200	44,0
46,0	23,4	20,3	18 300	17 800	17 300	16 800	46,0

B10




180 200 kg



360°

m	°	m	kg	kg	kg	kg	kg	m
7,3	85,0	55,9	222 700					7,3
7,5	84,8	55,9	222 100					7,5
8,0	84,3	55,8	220 200					8,0
8,5	83,7	55,7	216 400					8,5
9,0	83,2	55,7	207 800					9,0
10,0	82,1	55,5	191 500	158 400				10,0
11,0	81,0	55,4	170 300	148 200				11,0
12,0	80,0	55,2	148 800	131 300	128 000			12,0
13,0	78,9	55,0	132 500	118 000	117 000			13,0
14,0	77,8	54,7	118 100	106 200	106 000			14,0
15,0	76,7	54,5	106 600	96 600	96 200	87 600		15,0
16,0	75,6	54,2	97 100	88 500	88 000	80 600		16,0
17,0	74,5	53,9	88 600	81 300	81 100	74 600		17,0
18,0	73,4	53,6	81 600	75 200	74 900	69 100		18,0
19,0	72,3	53,3	75 500	69 800	69 500	64 400		19,0
20,0	71,1	52,9	69 900	64 900	64 800	60 300		20,0
22,0	68,9	52,2	60 900	56 900	60 500	56 400		22,0
24,0	66,6	51,3	53 600	50 300	53 300	49 900		24,0
26,0	64,2	50,3	47 500	44 800	47 300	44 500		26,0
28,0	61,8	49,3	42 500	40 200	42 300	39 900		28,0
30,0	59,3	48,1	38 200	36 300	38 100	36 100		30,0
32,0	56,8	46,8	34 500	32 800	34 400	32 700		32,0
34,0	54,2	45,3	31 300	29 900	31 200	29 700		34,0
36,0	51,5	43,8	28 500	27 200	28 500	27 200		36,0
38,0	48,7	42,0	26 000	24 900	26 000	24 900		38,0
40,0	45,7	40,1	23 800	22 800	23 800	22 800		40,0
42,0	42,6	38,0	21 800	20 900	21 900	21 000		42,0
44,0	39,3	35,6	20 000	19 200	20 100	19 300		44,0
46,0	35,7	32,8	18 300	17 700	18 500	17 800		46,0
48,0	31,8	29,7	16 800	16 200	17 000	16 400		48,0
50,0	27,3	26,0	15 400	14 900	15 700	15 100		50,0
52,0	22,0	21,4	14 100	13 700	14 400	14 000		52,0
					13 300	12 900		52,0



m	°	m	0° kg	1° kg	2° kg	3° kg	m
7,9	84,9	61,8	192 300				7,9
8,0	84,8	61,9	192 100				8,0
8,5	84,4	61,8	190 900				8,5
9,0	83,9	61,7	187 400				9,0
10,0	82,9	61,6	179 200	137 400			10,0
11,0	82,0	61,5	170 100	134 500	111 200		11,0
12,0	81,0	61,3	148 500	127 900	109 200		12,0
13,0	80,0	61,1	132 100	116 200	102 100	89 400	13,0
14,0	79,0	60,9	117 700	104 600	93 800	84 700	14,0
15,0	78,1	60,7	106 100	95 100	85 900	78 000	15,0
16,0	77,1	60,4	96 600	87 200	79 100	72 200	16,0
17,0	76,1	60,2	88 100	80 000	73 000	66 900	17,0
18,0	75,1	59,9	81 100	74 000	67 800	62 400	18,0
19,0	74,1	59,6	74 900	68 700	63 200	58 300	19,0
20,0	73,1	59,3	69 400	63 900	59 000	54 600	20,0
22,0	71,1	58,6	60 300	55 900	51 900	48 300	22,0
24,0	69,0	57,8	53 000	49 300	46 000	43 000	24,0
26,0	67,0	57,0	46 900	43 900	41 100	38 500	26,0
28,0	64,9	56,0	41 900	39 300	37 000	34 800	28,0
30,0	62,7	55,0	37 600	35 400	33 400	31 500	30,0
32,0	60,5	53,9	33 900	32 000	30 200	28 600	32,0
34,0	58,3	52,7	30 700	29 000	27 500	26 000	34,0
36,0	56,0	51,3	27 900	26 400	25 100	23 800	36,0
38,0	53,6	49,8	25 300	24 100	22 900	21 700	38,0
40,0	51,2	48,2	23 100	22 000	20 900	19 900	40,0
42,0	48,6	46,5	21 100	20 100	19 200	18 300	42,0
44,0	46,0	44,6	19 300	18 400	17 600	16 800	44,0
46,0	43,2	42,5	17 700	16 900	16 100	15 400	46,0
48,0	40,3	40,2	16 200	15 500	14 800	14 200	48,0
50,0	37,2	37,6	14 800	14 200	13 600	13 000	50,0
52,0	33,8	34,7	13 600	13 000	12 500	11 900	52,0
54,0	30,1	31,3	12 400	11 900	11 400	11 000	54,0
56,0	25,9	27,4	11 300	10 900	10 400	10 000	56,0
58,0	20,8	22,5	10 300	9 900	9 500	9 200	58,0

B10




180 200 kg



360°

8,5	84,8	67,8	169 300				8,5
9,0	84,4	67,8	166 900				9,0
10,0	83,6	67,6	160 500	122 800			10,0
11,0	82,7	67,5	154 000	120 100	95 300		11,0
12,0	81,8	67,3	146 500	115 700	94 900		12,0
13,0	80,9	67,2	132 100	110 200	94 300	76 700	13,0
14,0	80,0	67,0	117 600	103 500	91 600	76 200	14,0
15,0	79,2	66,8	106 100	94 100	84 100	74 700	15,0
16,0	78,3	66,6	96 500	86 300	77 700	70 300	16,0
17,0	77,4	66,3	88 000	79 200	71 700	65 200	17,0
18,0	76,5	66,1	80 900	73 200	66 600	60 800	18,0
19,0	75,6	65,8	74 800	68 000	62 100	56 900	19,0
20,0	74,7	65,5	69 200	63 200	58 000	53 300	20,0
22,0	72,9	64,9	60 200	55 300	51 000	47 200	22,0
24,0	71,0	64,2	52 800	48 800	45 300	42 000	24,0
26,0	69,2	63,5	46 700	43 400	40 400	37 700	26,0
28,0	67,3	62,6	41 700	38 900	36 300	34 000	28,0
30,0	65,4	61,7	37 400	35 000	32 800	30 700	30,0
32,0	63,4	60,7	33 700	31 600	29 700	27 900	32,0
34,0	61,5	59,6	30 500	28 700	27 000	25 400	34,0
36,0	59,4	58,5	27 700	26 100	24 600	23 200	36,0
38,0	57,4	57,2	25 100	23 700	22 400	21 200	38,0
40,0	55,3	55,8	22 900	21 700	20 500	19 400	40,0
42,0	53,1	54,3	20 900	19 800	18 800	17 800	42,0
44,0	50,9	52,7	19 100	18 100	17 200	16 300	44,0
46,0	48,6	50,9	17 500	16 600	15 700	14 900	46,0
48,0	46,2	49,0	16 000	15 200	14 400	13 700	48,0
50,0	43,7	47,0	14 600	13 900	13 200	12 500	50,0
52,0	41,0	44,7	13 400	12 700	12 100	11 500	52,0
54,0	38,3	42,2	12 200	11 600	11 100	10 500	54,0
56,0	35,3	39,4	11 100	10 600	10 100	9 600	56,0
58,0	32,1	36,3	10 100	9 700	9 200	8 800	58,0
60,0	28,6	32,8	9 200	8 800	8 400	8 000	60,0
62,0	24,5	28,6	8 300	8 000	7 600	7 200	62,0
64,0	19,7	23,4	7 500	7 200	6 800	6 500	64,0



m	°	m	0° kg	1° kg	2° kg	3° kg	m
9,1	84,8	73,8	140 100				9,1
10,0	84,1	73,7	139 300				10,0
11,0	83,3	73,6	137 200	100 700			11,0
12,0	82,5	73,4	132 000	100 300	77 600		12,0
13,0	81,7	73,3	125 400	98 400	77 300		13,0
14,0	80,9	73,1	117 100	95 500	77 000	61 900	14,0
15,0	80,1	72,9	105 500	91 400	76 700	61 700	15,0
16,0	79,3	72,7	95 900	84 800	73 900	61 500	16,0
17,0	78,4	72,5	87 400	77 900	69 900	60 800	17,0
18,0	77,6	72,3	80 300	72 000	64 900	58 300	18,0
19,0	76,8	72,0	74 100	66 800	60 500	55 000	19,0
20,0	76,0	71,8	68 600	62 100	56 400	51 500	20,0
22,0	74,3	71,2	59 500	54 200	49 600	45 500	22,0
24,0	72,7	70,6	52 100	47 800	43 900	40 500	24,0
26,0	71,0	69,9	46 000	42 400	39 200	36 200	26,0
28,0	69,3	69,1	41 000	37 900	35 100	32 600	28,0
30,0	67,6	68,3	36 600	34 000	31 600	29 400	30,0
32,0	65,8	67,4	32 900	30 600	28 600	26 600	32,0
34,0	64,1	66,4	29 700	27 700	25 900	24 200	34,0
36,0	62,3	65,4	26 900	25 100	23 500	22 000	36,0
38,0	60,4	64,3	24 400	22 800	21 400	20 000	38,0
40,0	58,6	63,0	22 200	20 800	19 500	18 300	40,0
42,0	56,7	61,7	20 200	18 900	17 800	16 700	42,0
44,0	54,7	60,3	18 400	17 200	16 200	15 200	44,0
46,0	52,7	58,8	16 700	15 700	14 800	13 900	46,0
48,0	50,7	57,2	15 200	14 300	13 500	12 600	48,0
50,0	48,5	55,4	13 900	13 000	12 300	11 500	50,0
52,0	46,4	53,5	12 600	11 900	11 200	10 500	52,0
54,0	44,1	51,5	11 500	10 800	10 100	9 500	54,0
56,0	41,7	49,3	10 400	9 800	9 200	8 600	56,0
58,0	39,2	46,8	9 400	8 800	8 300	7 800	58,0
60,0	36,6	44,2	8 500	8 000	7 500	7 000	60,0
62,0	33,7	41,3	7 600	7 100	6 700	6 100	62,0
64,0	30,7	38,0	6 800	6 300	5 800	5 300	64,0
66,0	27,3	34,2	5 900	5 400	5 000	4 500	66,0
68,0	23,5	29,8	5 000	4 600	4 200		68,0
70,0	18,9	24,4	4 200	3 800			70,0

B10




180 200 kg



360°

 m	 °	 m	 kg	 kg	 kg	 kg	 m
9,8	84,7	79,7	116 300				9,8
10,0	84,6	79,7	116 100				10,0
11,0	83,8	79,6	115 300	83 400			11,0
12,0	83,1	79,5	114 600	82 900			12,0
13,0	82,3	79,3	113 800	82 500	63 400		13,0
14,0	81,6	79,2	111 300	82 100	63 100	50 300	14,0
15,0	80,8	79,0	104 300	81 700	62 900	50 200	15,0
16,0	80,1	78,8	95 800	80 000	62 700	50 000	16,0
17,0	79,4	78,6	87 200	77 000	62 400	49 900	17,0
18,0	78,6	78,4	80 100	71 200	62 200	49 700	18,0
19,0	77,8	78,2	73 900	66 000	59 300	49 500	19,0
20,0	77,1	78,0	68 300	61 300	55 300	49 000	20,0
22,0	75,6	77,4	59 200	53 600	48 700	44 300	22,0
24,0	74,0	76,9	51 800	47 200	43 100	39 400	24,0
26,0	72,5	76,2	45 700	41 800	38 400	35 300	26,0
28,0	71,0	75,6	40 700	37 400	34 400	31 700	28,0
30,0	69,4	74,8	36 300	33 500	30 900	28 600	30,0
32,0	67,8	74,0	32 600	30 200	27 900	25 800	32,0
34,0	66,2	73,1	29 400	27 300	25 300	23 400	34,0
36,0	64,6	72,2	26 600	24 700	22 900	21 300	36,0
38,0	62,9	71,1	24 100	22 400	20 800	19 300	38,0
40,0	61,2	70,0	21 800	20 300	18 900	17 600	40,0
42,0	59,5	68,9	19 800	18 500	17 200	16 000	42,0
44,0	57,8	67,6	18 000	16 800	15 700	14 600	44,0
46,0	56,0	66,3	16 400	15 300	14 300	13 300	46,0
48,0	54,2	64,8	14 900	13 900	13 000	12 100	48,0
50,0	52,4	63,3	13 500	12 600	11 800	10 900	50,0
52,0	50,5	61,7	12 300	11 500	10 700	9 900	52,0
54,0	48,5	59,9	11 100	10 400	9 600	9 000	54,0
56,0	46,5	58,0	10 000	9 400	8 700	8 100	56,0
58,0	44,4	56,0	9 100	8 400	7 800	7 200	58,0
60,0	42,2	53,8	8 100	7 500	6 900	6 200	60,0
62,0	40,0	51,4	7 300	6 600	6 000	5 400	62,0
64,0	37,6	48,9	6 300	5 700	5 100	4 600	64,0
66,0	35,0	46,1	5 400	4 900	4 300		66,0
68,0	32,3	43,0	4 600	4 100			68,0



 m	 °	 m	 kg	 kg	 kg	 kg	 m
10,4	84,7	85,7	98 000				10,4
11,0	84,3	85,7	97 500				11,0
12,0	83,6	85,5	96 800	69 400			12,0
13,0	82,9	85,4	96 200	69 000			13,0
14,0	82,2	85,3	95 500	68 700	52 200		14,0
15,0	81,5	85,1	94 900	68 300	52 000		15,0
16,0	80,8	84,9	91 500	68 000	51 700	40 700	16,0
17,0	80,1	84,8	86 600	67 600	51 500	40 600	17,0
18,0	79,4	84,6	79 500	67 300	51 300	40 500	18,0
19,0	78,7	84,3	73 300	64 300	51 100	40 300	19,0
20,0	78,0	84,1	67 700	60 200	50 700	40 200	20,0
22,0	76,6	83,7	58 600	52 500	47 300	39 900	22,0
24,0	75,2	83,1	51 100	46 100	41 800	37 800	24,0
26,0	73,8	82,5	45 000	40 800	37 100	33 900	26,0
28,0	72,4	81,9	39 900	36 400	33 200	30 400	28,0
30,0	70,9	81,2	35 600	32 600	29 800	27 300	30,0
32,0	69,5	80,5	31 800	29 200	26 800	24 600	32,0
34,0	68,0	79,7	28 600	26 300	24 200	22 300	34,0
36,0	66,5	78,8	25 800	23 800	21 900	20 100	36,0
38,0	65,0	77,9	23 300	21 500	19 800	18 200	38,0
40,0	63,5	76,9	21 000	19 400	17 900	16 500	40,0
42,0	61,9	75,8	19 000	17 600	16 200	14 900	42,0
44,0	60,4	74,7	17 200	15 900	14 700	13 500	44,0
46,0	58,8	73,4	15 600	14 400	13 300	12 200	46,0
48,0	57,2	72,2	14 100	13 000	12 000	11 000	48,0
50,0	55,5	70,8	12 700	11 700	10 800	9 900	50,0
52,0	53,8	69,3	11 500	10 600	9 700	8 900	52,0
54,0	52,1	67,8	10 300	9 500	8 700	7 800	54,0
56,0	50,3	66,1	9 200	8 500	7 600	6 800	56,0
58,0	48,5	64,4	8 200	7 400	6 600	5 800	58,0
60,0	46,6	62,5	7 200	6 400	5 600	4 900	60,0
62,0	44,7	60,5	6 100	5 400	4 700	4 000	62,0
64,0	42,7	58,3	5 200	4 500	3 800		64,0
66,0	40,6	56,0	4 300				66,0