


INSERTS, PENDANTS, AND TIMBERS REQ'D. FOR VARIOUS BOOM LENGTHS									
ITEM NO.		28	29	30	31	32	27	EQUALIZER PLATFORM ITEM 23 LOCATION SEE VIEW D SEE (8)	
DWG. NO.		174425	174422	277383 DWG. 78145	277384 DWG. 78145	174915	666852		
BOOM LENGTH		#49A 20 FT 6.1m INSERT	#49A 40 FT 12.2m INSERT	20 FT 1.50 6.13m PENDANT	40 FT 3.00 12.27m PENDANT	WIRE ROPE TIMBER	(OPTIONAL) PENDANT TIE DOWN STRAPS SEE (7)		
FEET	METERS								
82 BASIC	25.0	0	0	4	0	2	0	241.25	
102	31.1	1	0	4	0	3	2	241.25	
122	37.2	OR 0 2	1	0	4	4	4	483.25 SEE (9)	
142	43.3	1	1	4	4	5	8	719.50	
162	49.4	OR 0 2	2	0	8	6	10	963.25 SEE (9)	
			1	8	4	6	12	963.25 SEE (9)	

INSERT NOTES:

1. THE SHORTER #49A INSERTS MUST BE LOCATED CLOSEST TO THE BOOM BUTT. 20 FT (6.1m) INSERT FIRST, THEN THE 40 FT (12.2m) INSERTS.



PENDANT NOTES:

1. LOCATE 20 FT 1.50 (6.13m) PENDANTS NEXT TO EQUALIZER.

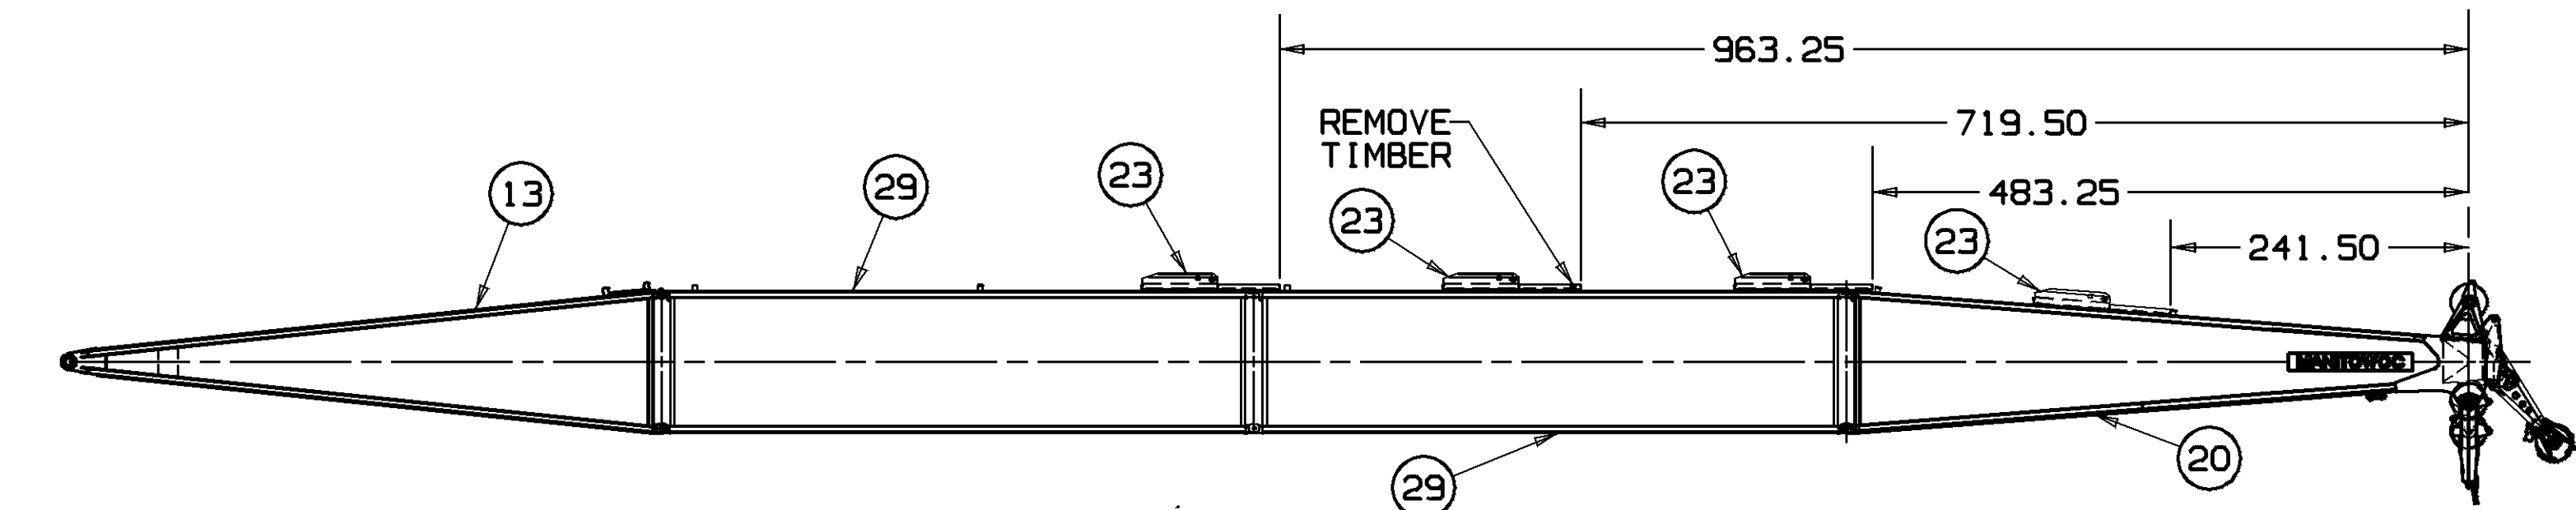

EQUALIZER PLATFORM ITEM 23 LOCATIONS
REF. REQ'D. FOR VARIOUS BOOM LENGTHS TABLE

VIEW D

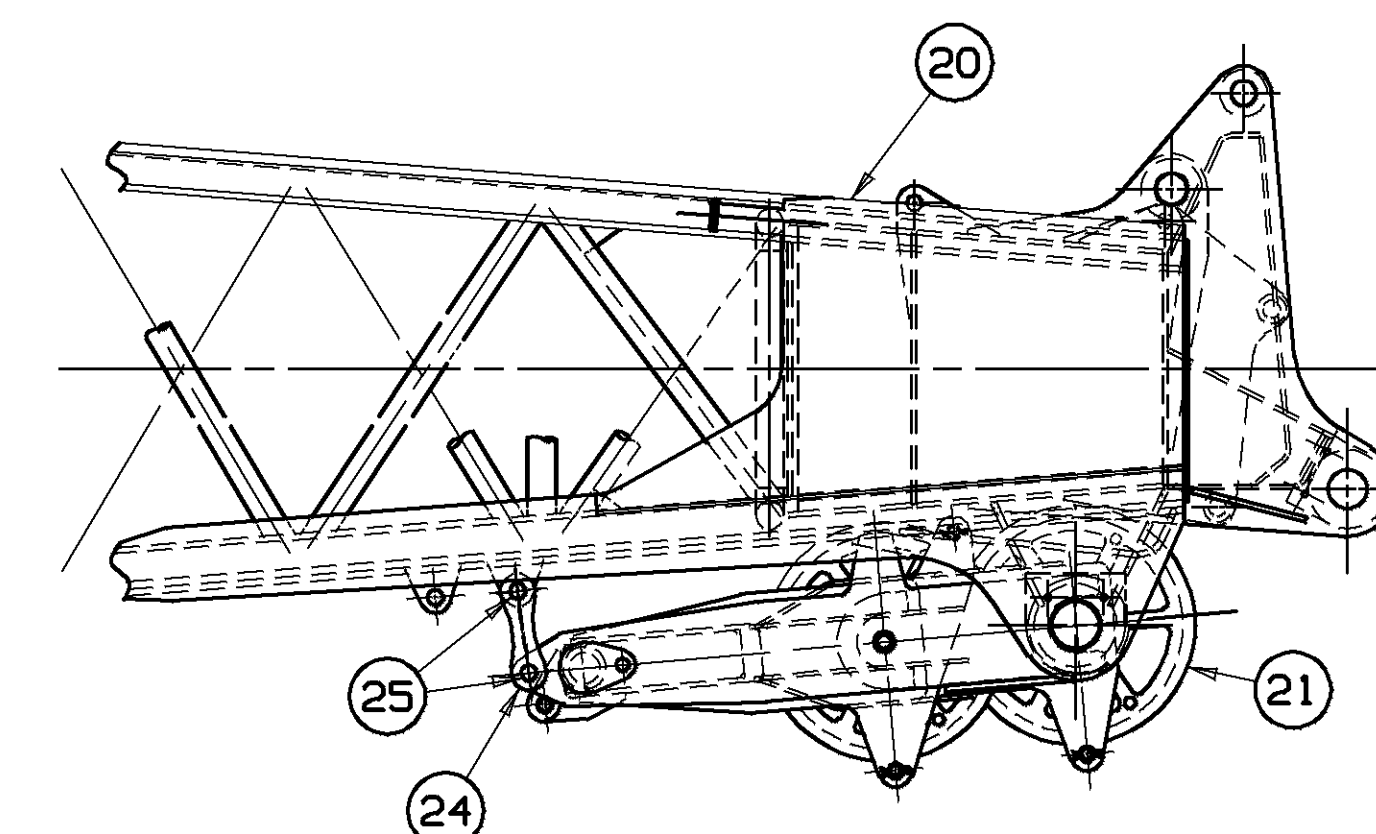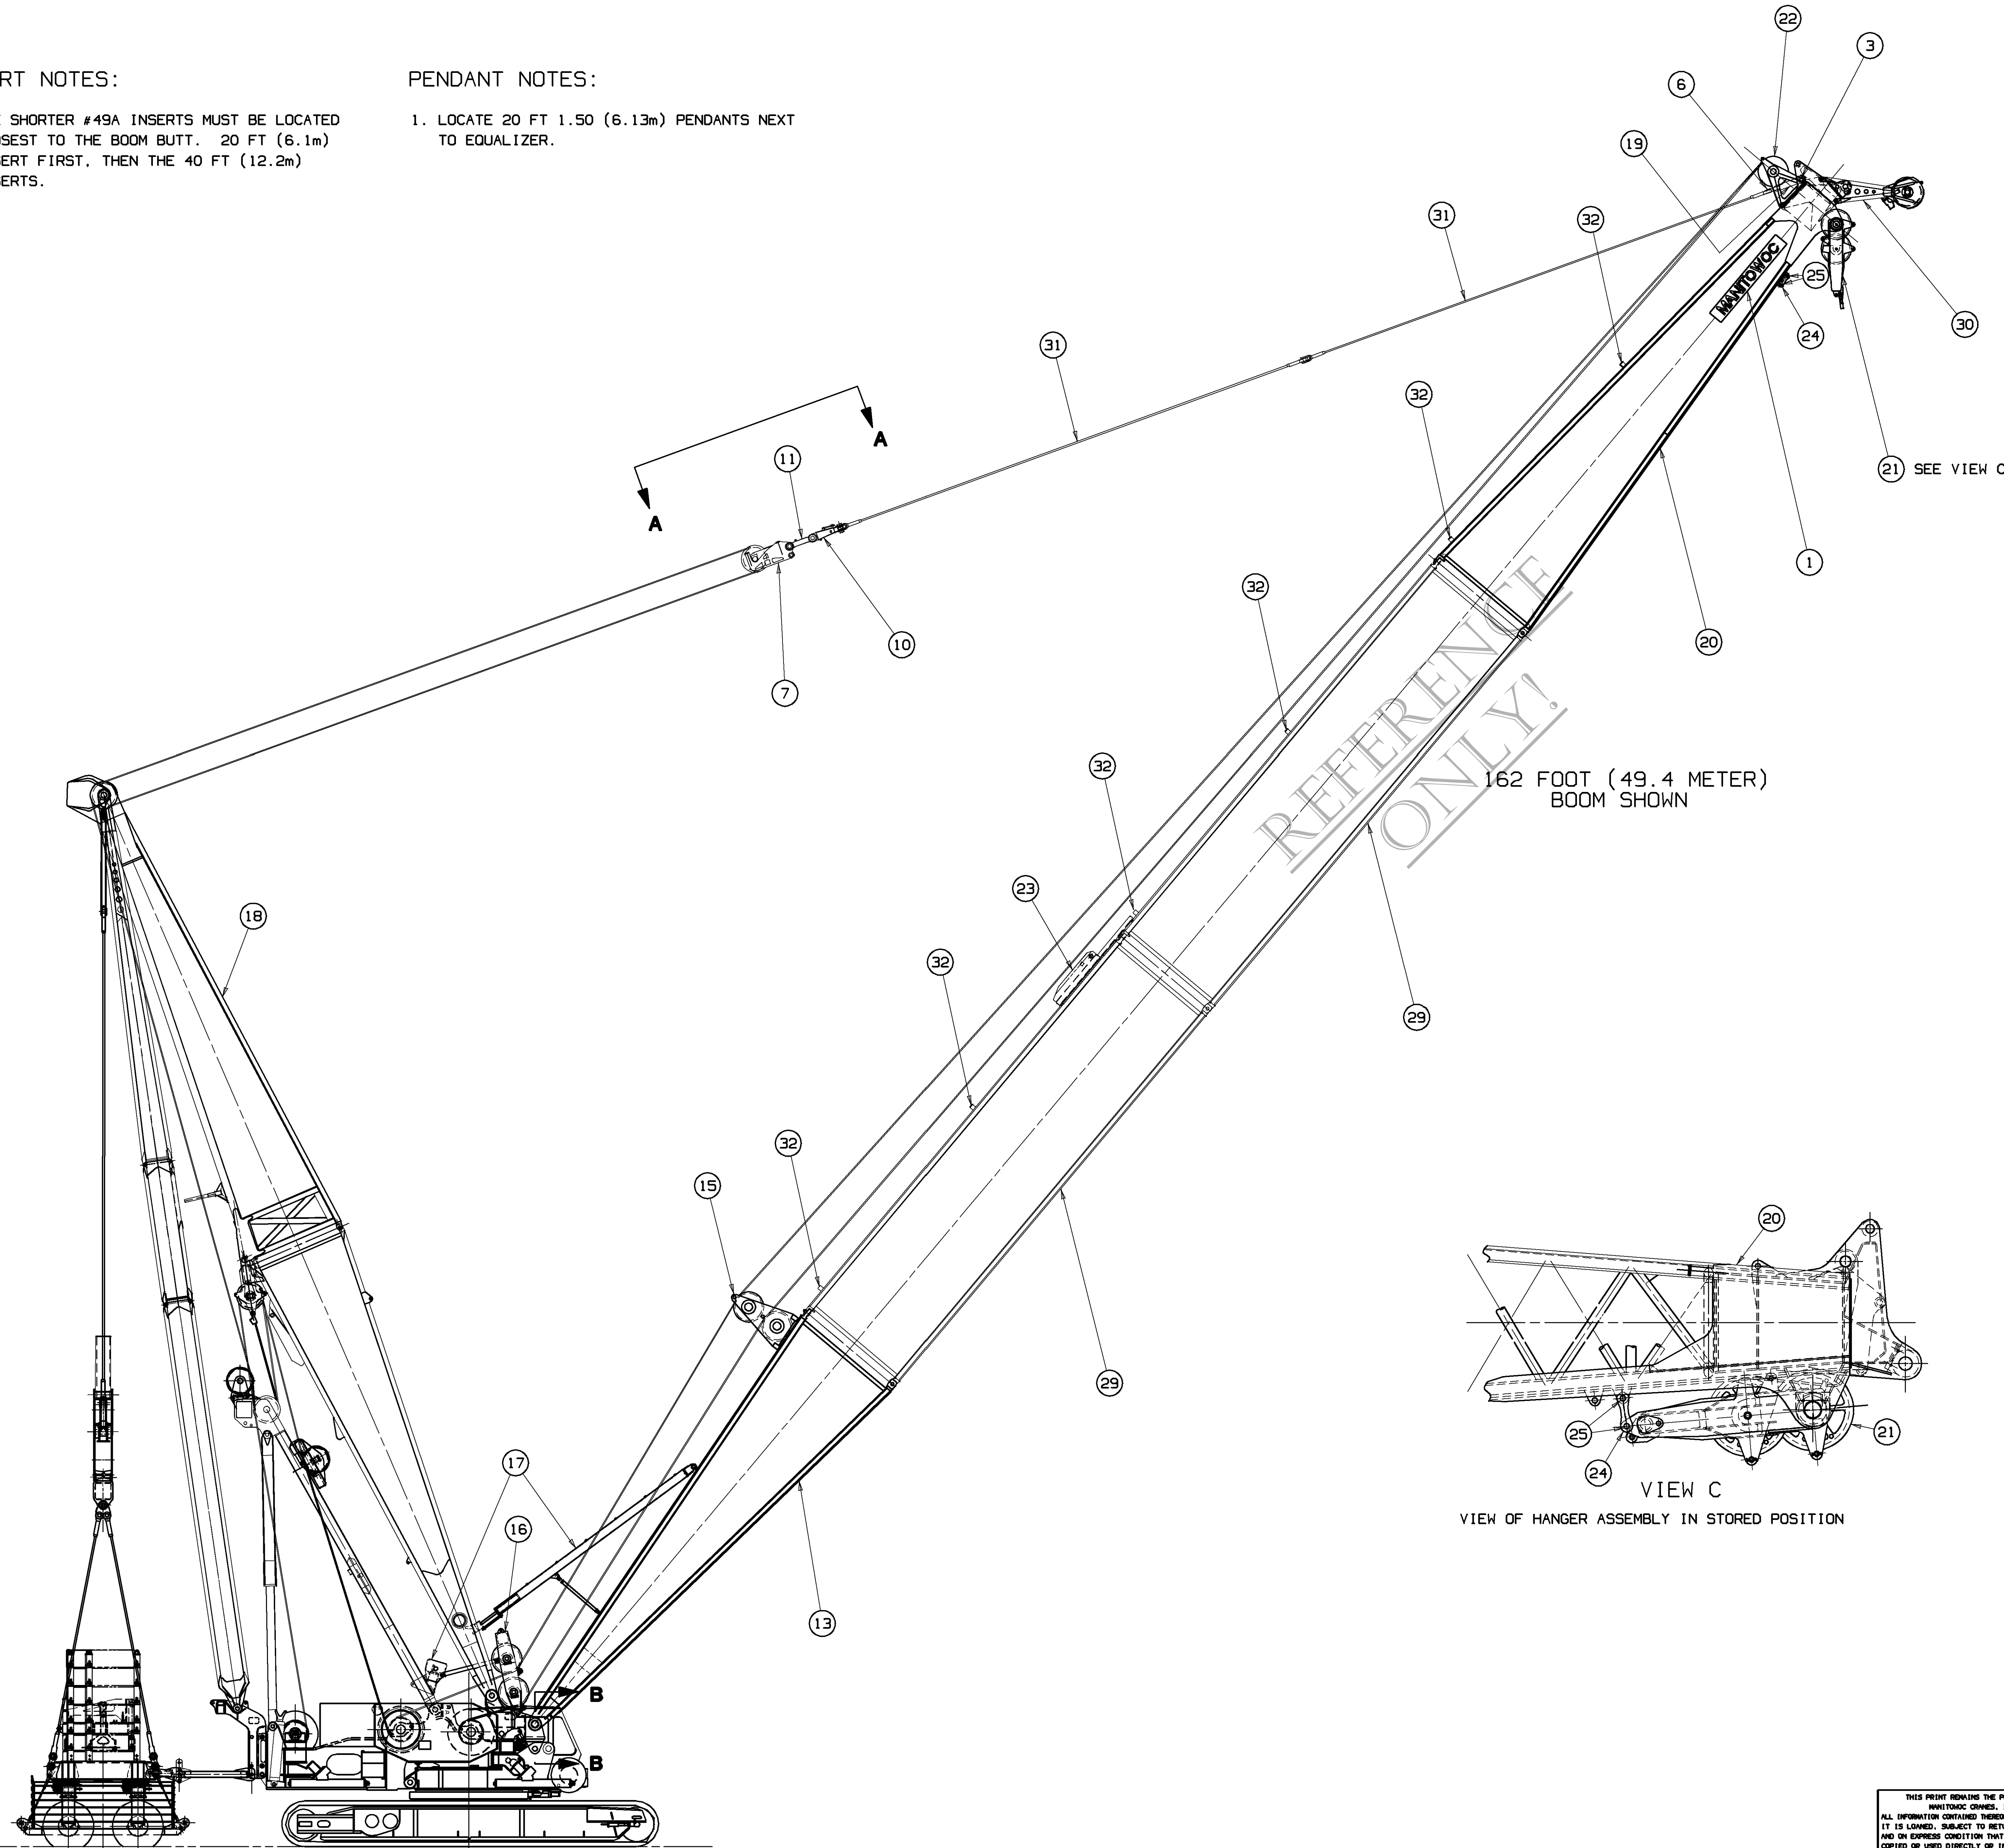

VIEW C
VIEW OF HANGER ASSEMBLY IN STORED POSITION


BILL OF MATERIAL					ASSEMBLIES USED ON
ITEM NO.	QTY	DESCRIPTION	UNIT	MATERIAL	
82 FT. (25.0m) BASIC BOOM ALSO SEE REQ'D. FOR VARIOUS BOOM LENGTHS TABLE					
1	2	BOOM SIGN		22656	
2	2	END PLATE		76095	3
3	2	PIN		139139	
4	1	BOOM ANGLE INDICATOR ASSEMBLY		168779	6
5	2	EQUALIZER PENDANT LINK		169834	
6	4	PIN		170690	
7	1	EQUALIZER ASSEMBLY		171248	
8	2	PIN		171500	3
9	2	PIN		172132	
10	2	PENDANT LINK		172669	
11	2	PENDANT LINK		172670	
12	2	PIN		172675	
13	1	BOOM BUTT (40 FT.) - (12.2m)		174551	
14	2	WASHERS		174904	
15	1	WIRE ROPE GUIDE ASSEMBLY		174944	
16	1	WIRE ROPE GUIDE ASSEMBLY		174946	5
17	1	BOOM STOP ASSEMBLY		174955	
18	1	MAST ASSEMBLY		176113	
19	2	PENDANT LINK		176183	
20	1	BOOM TOP (42 FT.) - (12.8m)		176203	
21	1	LOWER BOOM POINT HANGER FRAME ASS'Y		176213	1
22	1	WIRE ROPE GUIDE ASSEMBLY		176214	
23	1	EQUALIZER PLATFORM ASSEMBLY		176358	8
24	2	LINK		176330	
25	4	PIN		2394	
26					
27					
28					
29					
OPTIONAL PARTS					
30	1	BOOM POINT ASSEMBLY (UPPER)		170419	1

- (1) 1.125 (29 mm) WIRE ROPE.
- (2) ON DWG. 78145.
- (3) INSTALL WITH HEAD ON BOTTOM. WIRE END PLATE SCREWS TOGETHER.
- (4) SEE DWG. 176265 (INDICATOR ASSEMBLY P.A.T. DUMMY LOAD LINK INSTALLATION) FOR USE WITH THE P.A.T. LOAD MOMENT INDICATOR.
- (5) BOOM STOP SUPPORT BEAM 174960 (REF.) AND MAST ITEM 18 MUST BE IN PLACE BEFORE INSTALLING WIRE ROPE GUIDE ASSEMBLY ITEM 16. WIRE ROPE GUIDE ASSEMBLY ITEM 16 MUST BE REMOVED PRIOR TO LOWERING MAST.
- (6) NOT SHOWN
- (7) SEE CRANE ASSEMBLY AND RIGGING GUIDE IN THE OPERATIONS MANUAL FOR INSTRUCTIONS ON PENDANT STORAGE.
- (8) EQUALIZER PLATFORM ASSEMBLY ITEM 23 IS DESIGNED SOLELY TO FACILITATE PENDANT INSTALLATION AND REMOVAL. DO NOT APPLY TENSION TO BOOM HOIST LINE WHEN EQUALIZER IS PINNED TO PLATFORM.
- (9) PLATFORM ITEM 23 MUST BE REMOVED TO ASSEMBLE OR DIS-ASSEMBLE THE BOOM.

THIS PRINT REMAINS THE PROPERTY OF MANTOWOC CRANES, INC. ALL INFORMATION CONTAINED HEREON IS CONFIDENTIAL. IT IS LOANED, SUBJECT TO RETURN WHEN DEMAND. AND ON EXPRESS CONDITION THAT IT IS NOT TO BE COPIED OR USED DIRECTLY OR INDIRECTLY IN ANY MANNER DETRIMENTAL TO OUR INTERESTS.		TOLERANCE UNLESS OTHERWISE SPECIFIED		MANTOWOC CRANES, INC.	
DECIMAL PLACES	FABRICATION	MACHINING	WELDING	DR. LS	MANUFACTURED BY
(1) PLACE 0.0	± 1.00	± 1.00	± 0.00	OK. LS	MOORE-250 MAX-ER 400
(2) PLACE 0.00	± 0.00	± 1.00	± 0.05	APP. TSC	1.50 SWAGED PENDANTS
(3) PLACE 0.000	± 0.000	± 0.05	± 0.05		(USA)
ANGLES	41°-50°	40°-50°			

12-14-94
PATTERN NO.

176112
SHT 1 OF 2

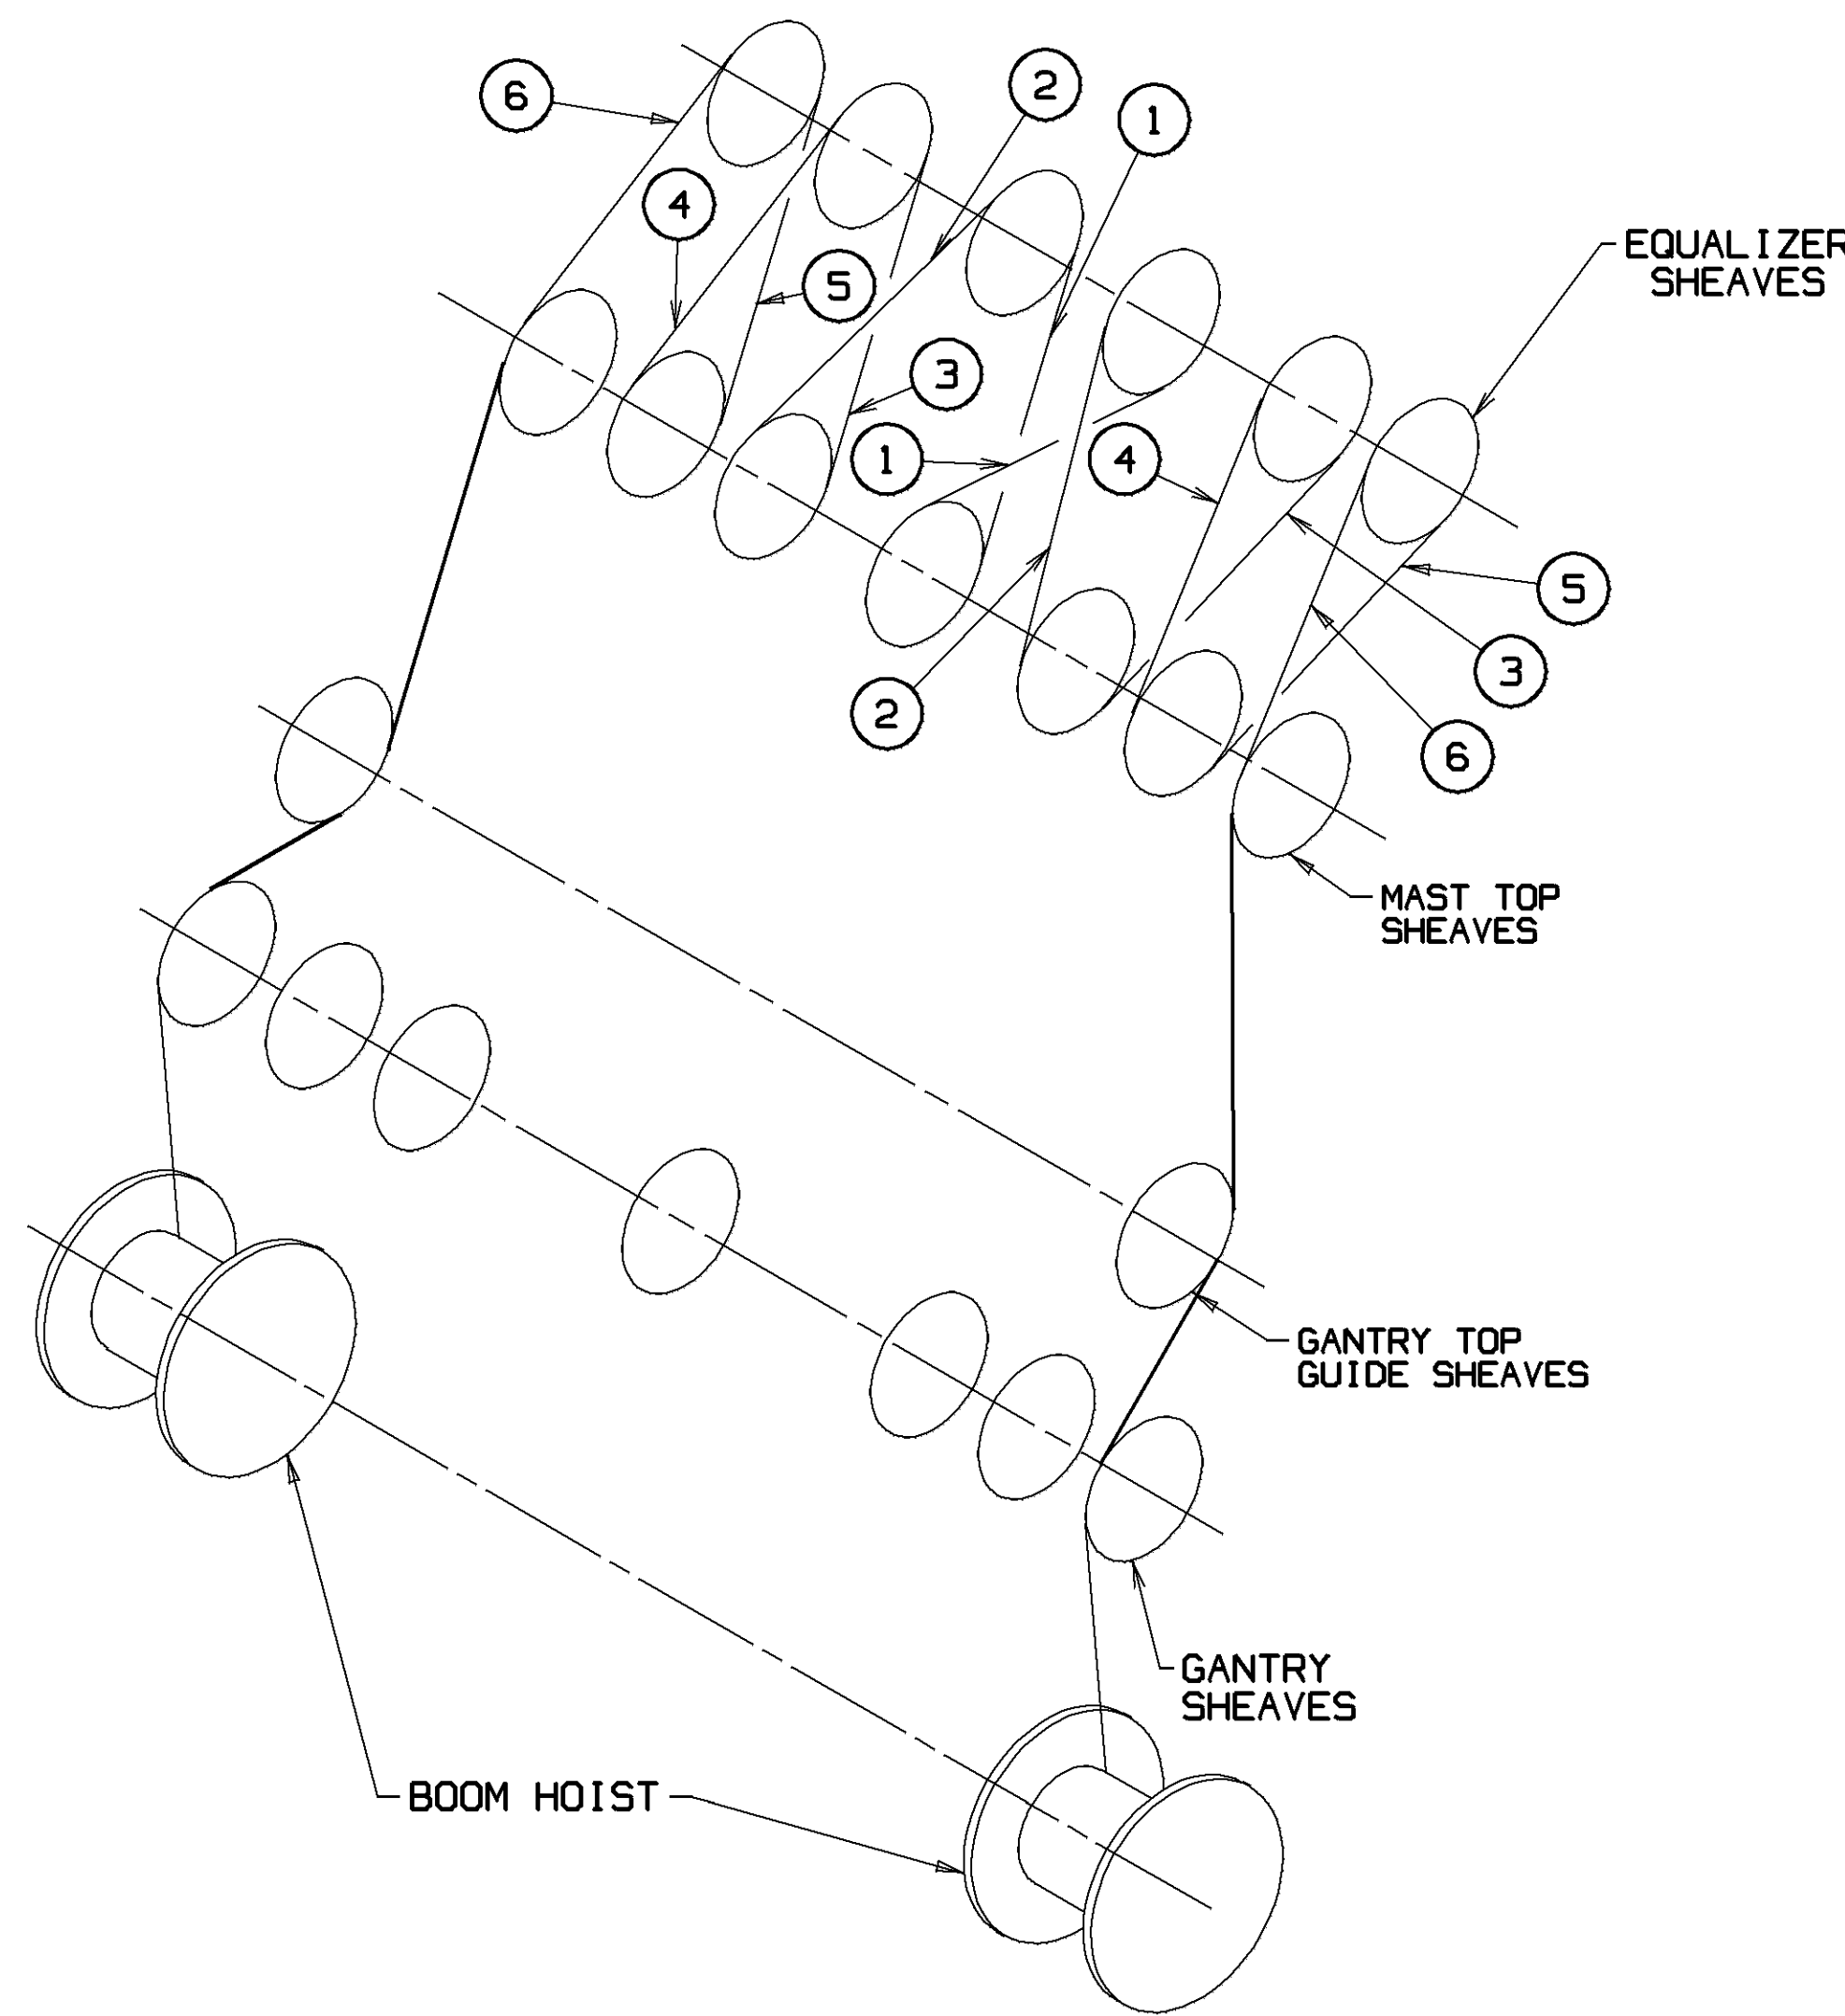

BOOM HOIST REEVING DIAGRAM FOR 12 PART LINE

2150 FEET (655.3 M) OF 1.00" (26mm)-6 X 26 HARRINGTON SEAL, EXTRA IMPROVED PLOW STEEL, ALTERNATE LAY, IWRC (719095) - B.S. 103,400 LBS. (46 900 kg)

OR


ALTERNATE WIRE ROPE

2150 FEET (655.3 M) OF 1.00" (26mm)-6 X 26 HARRINGTON SEAL, EXTRA IMPROVED PLOW STEEL, REGULAR LAY, IWRC (719276) - B.S. 103,400 LBS. (46 900 kg)


OR

ALTERNATE WIRE ROPE

2150 FEET (655.3 M) OF 1.00" (26mm) DYFORM-6 (719359) - B.S. 113,800 LBS. (51 620 kg)

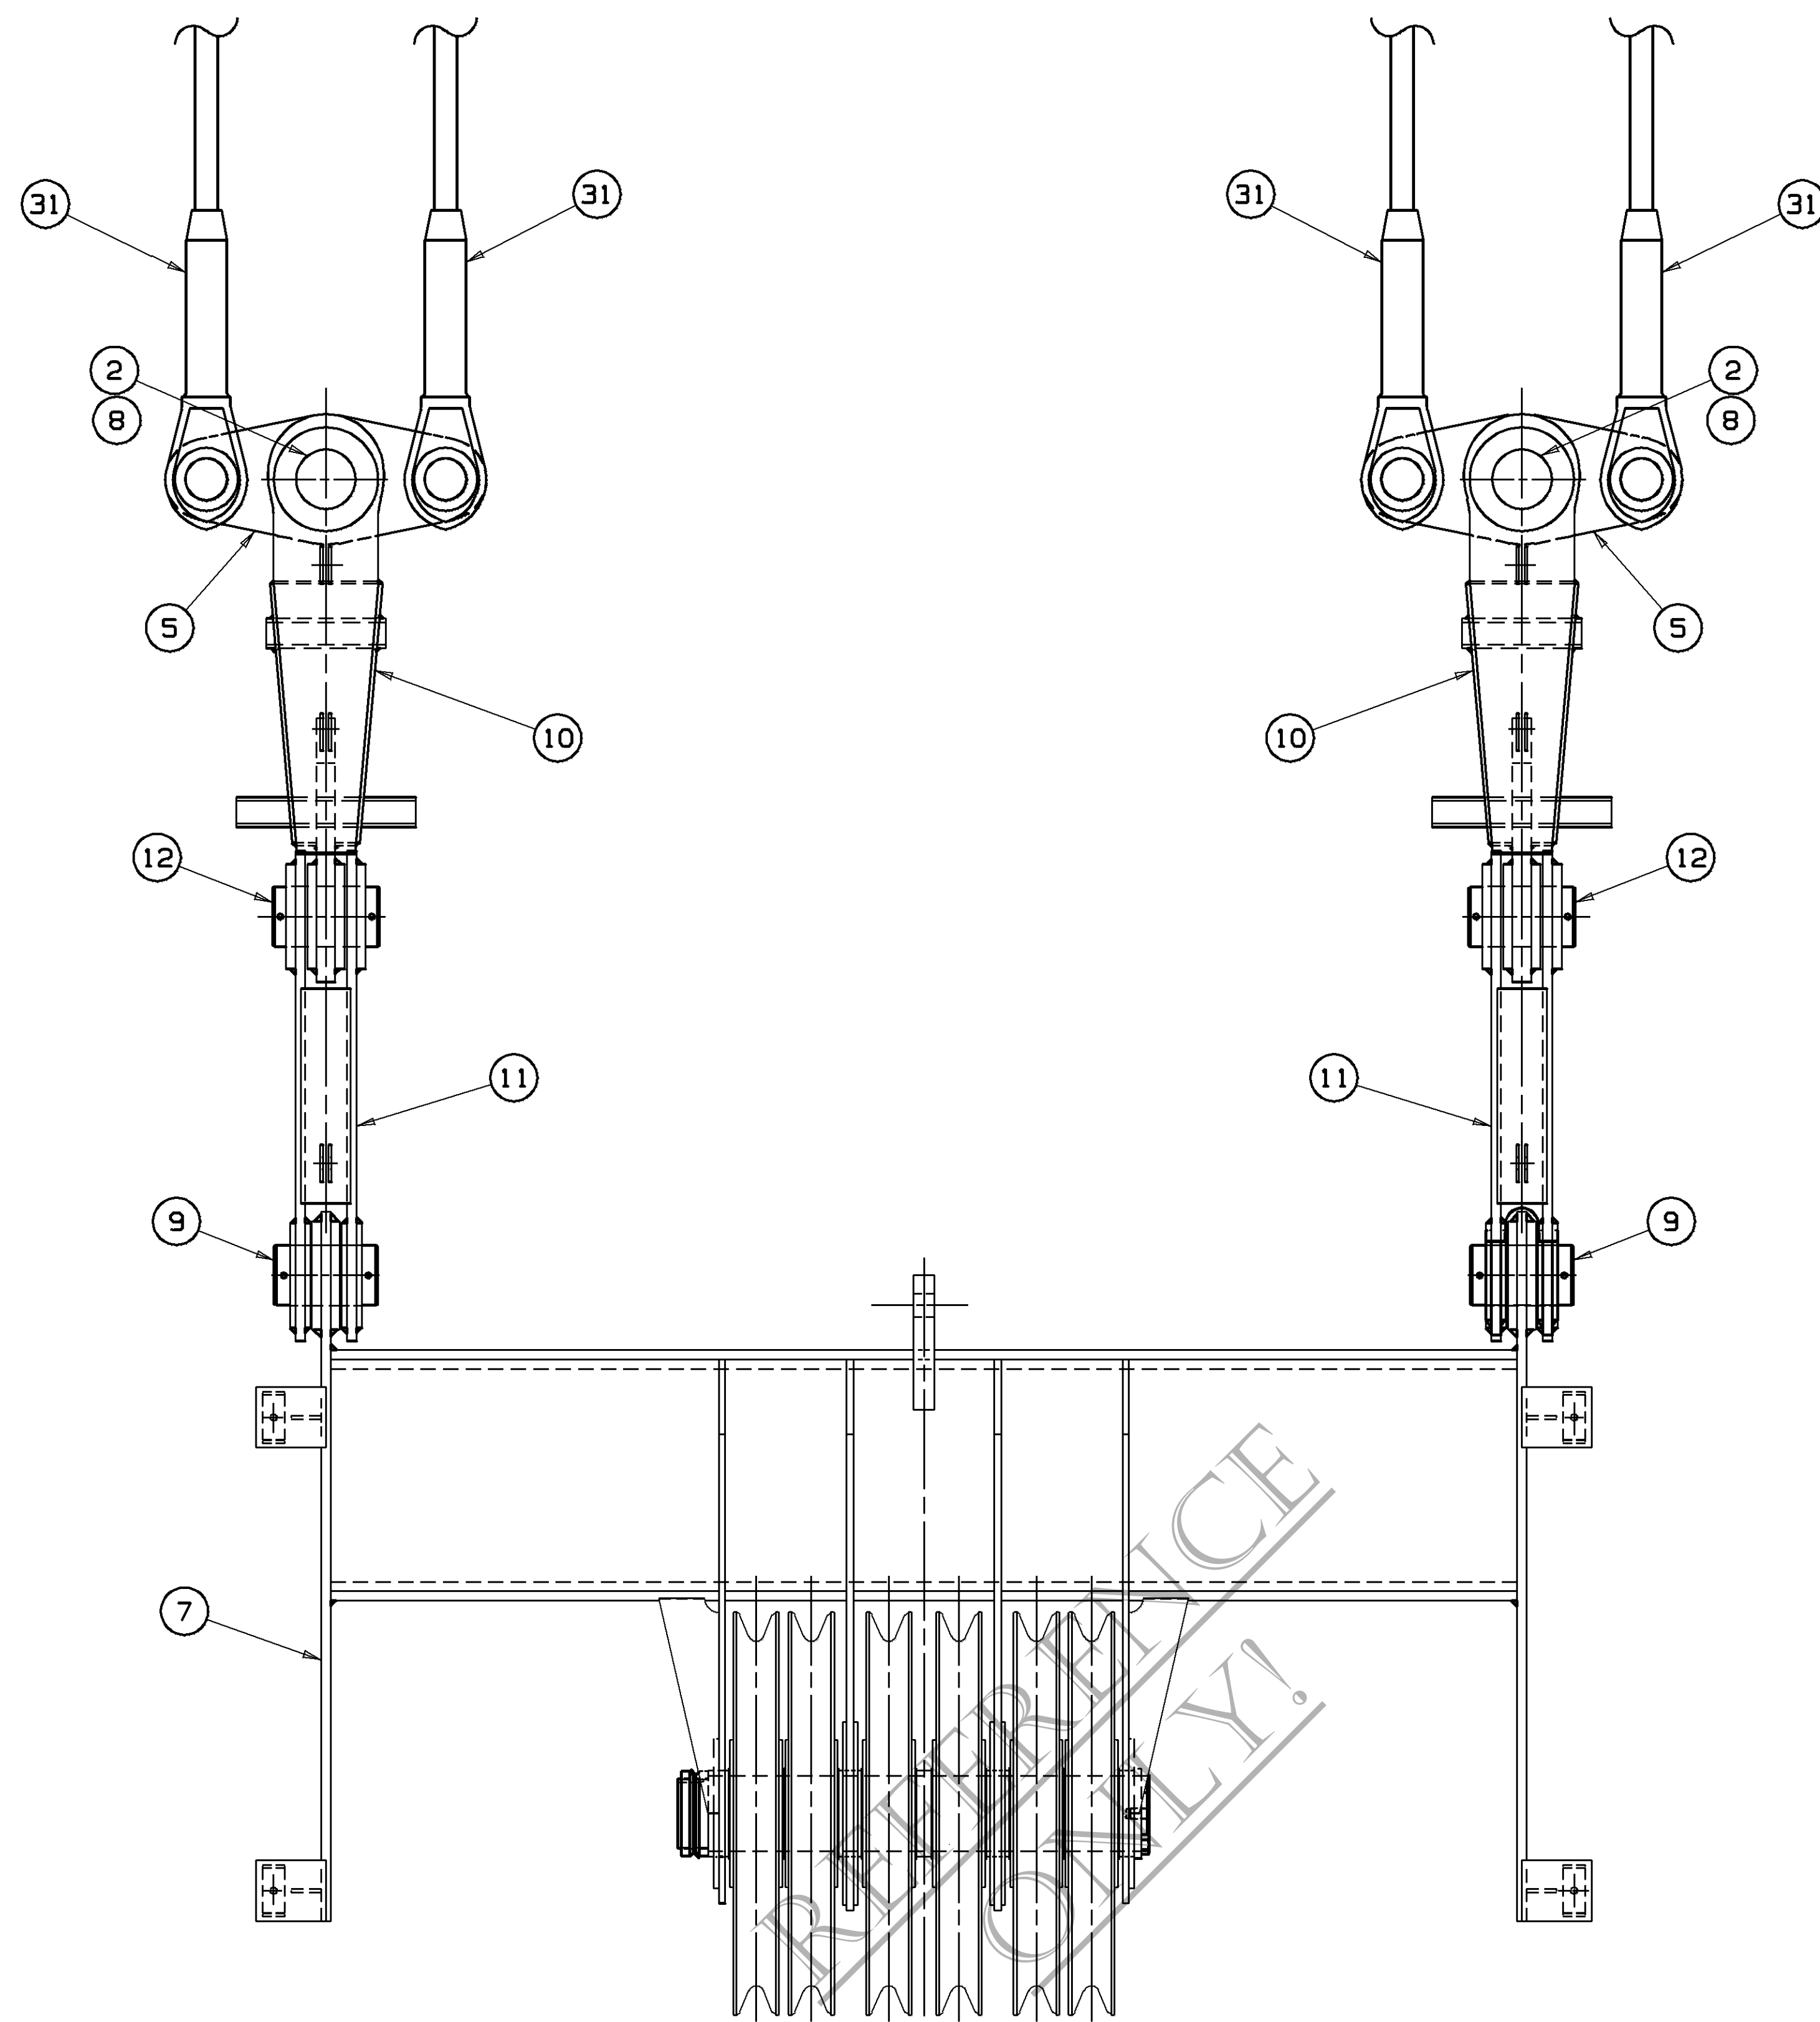

VIEW "A" - "A"

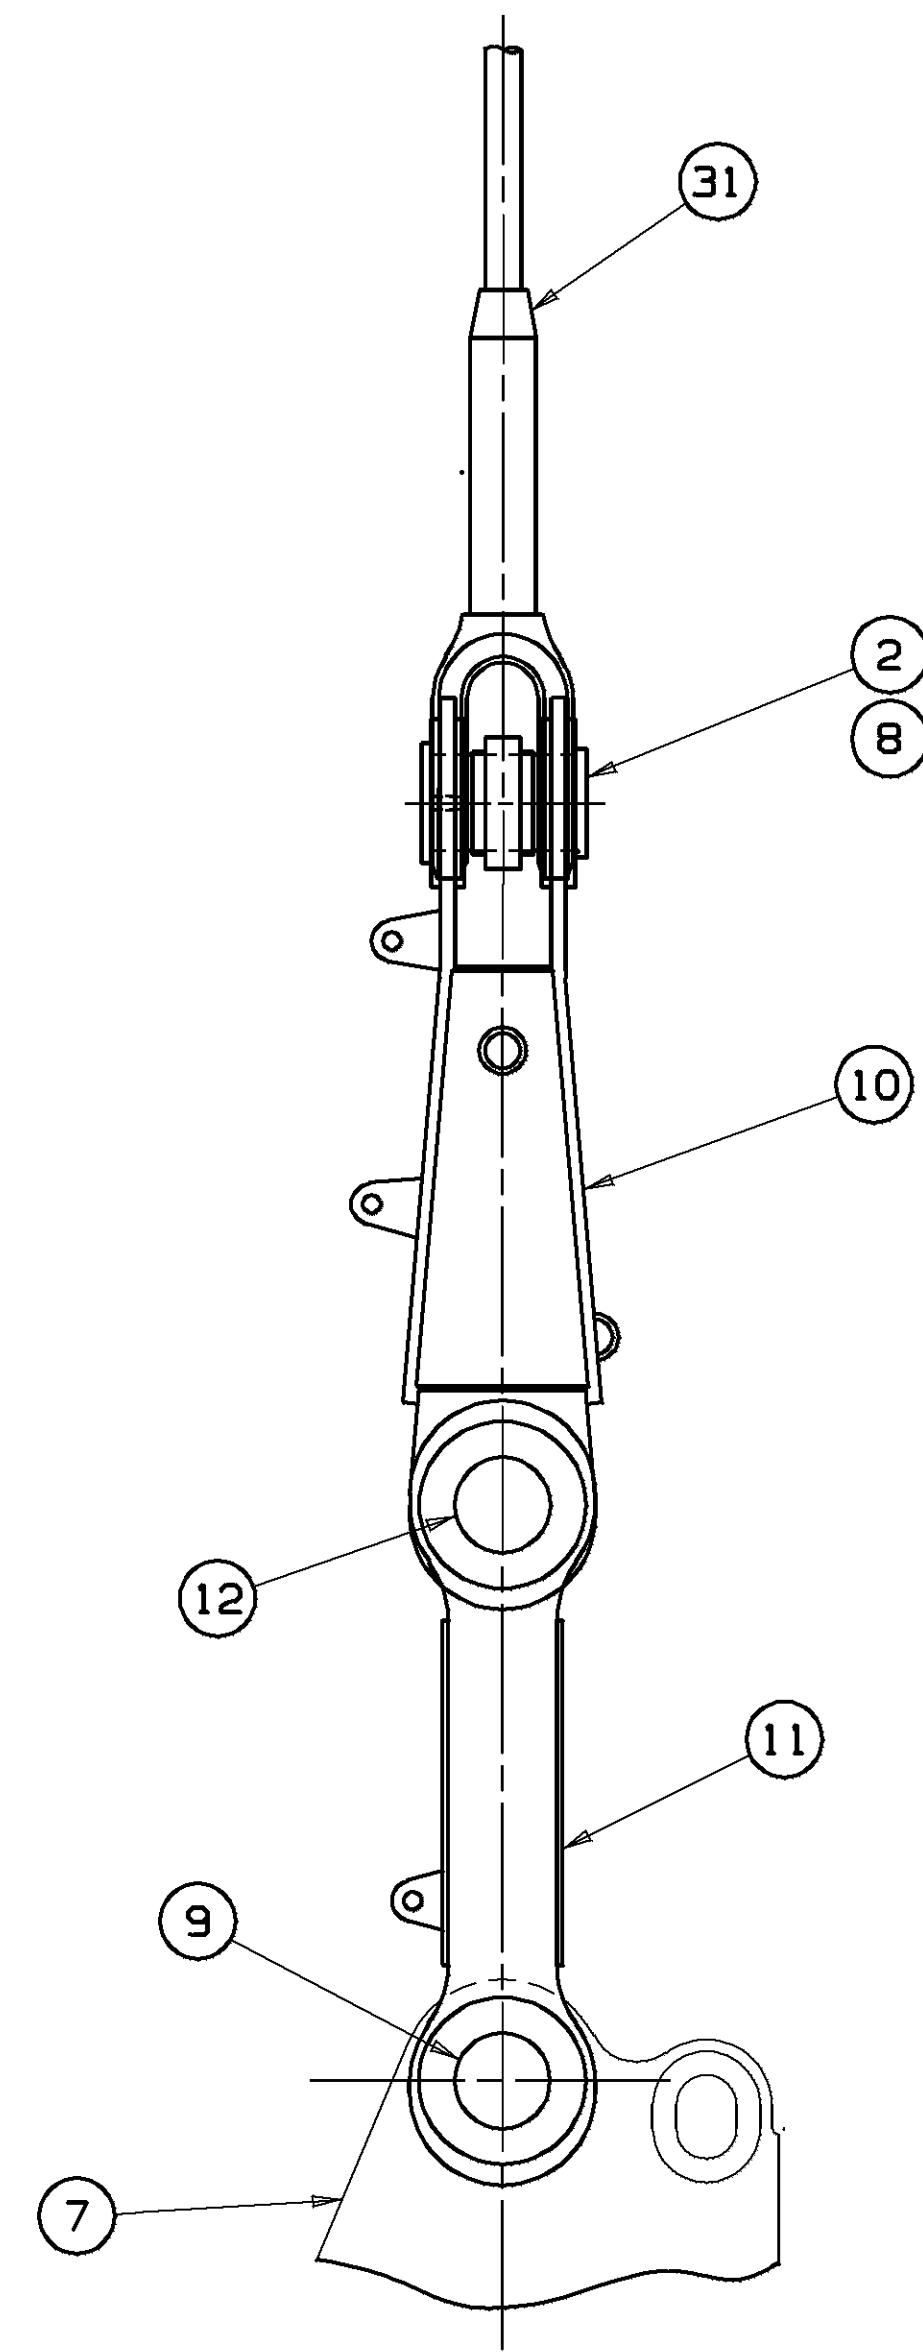

SECTION "B" - "B"

THIS PRINT REMAINS THE PROPERTY OF MANTOWOC CRANES, INC. ALL INFORMATION CONTAINED THEREON IS CONFIDENTIAL. IT IS LOANED, SUBJECT TO RETURN UPON DEMAND. AND ON EXPRESS CONDITION THAT IT IS NOT TO BE COPIED OR USED DIRECTLY OR INDIRECTLY IN ANY MANNER THAT WOULD BE DETRIMENTAL TO OUR INTERESTS.				TOLERANCE UNLESS OTHERWISE SPECIFIED				SCALE				Mantowoc Cranes, Inc. BOOM RIGGING ASSEMBLY			
DECIMAL PLACES	FABRICATION	MACHINING	WELDING	DR. LS	MANUFACTURED IN	MODEL	DATE	DR. LS	MANUFACTURED IN	MODEL	DATE	DR. LS	MANUFACTURED IN	MODEL	DATE
(1) PLACE 0.0	± 1.50	± 1.50	± 0.50	DR. LS	Mantowoc, Wisconsin	# 49A BOOM		DR. LS	Mantowoc, Wisconsin	# 49A BOOM		DR. LS	Mantowoc, Wisconsin	# 49A BOOM	
(2) PLACE 0.00	± 0.00	± 0.00	± 0.05	DR. LS	Mantowoc, Wisconsin	1.50 SWAGED PENDANTS		DR. LS	Mantowoc, Wisconsin	1.50 SWAGED PENDANTS		DR. LS	Mantowoc, Wisconsin	1.50 SWAGED PENDANTS	
(3) PLACE 0.000	± 0.000	± 0.000	± 0.005	APP TSC		(USA)		APP TSC		(USA)		APP TSC		(USA)	